
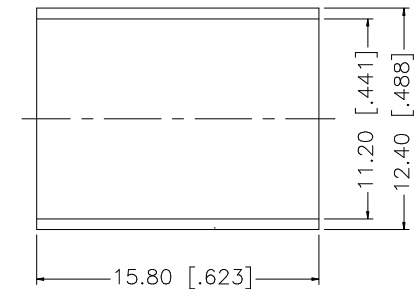
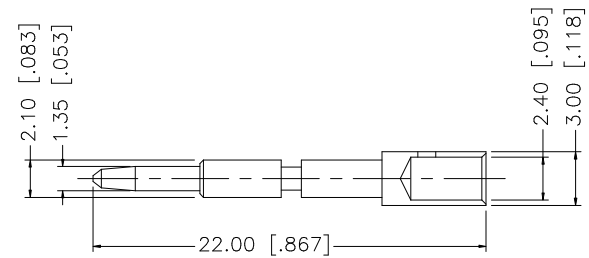
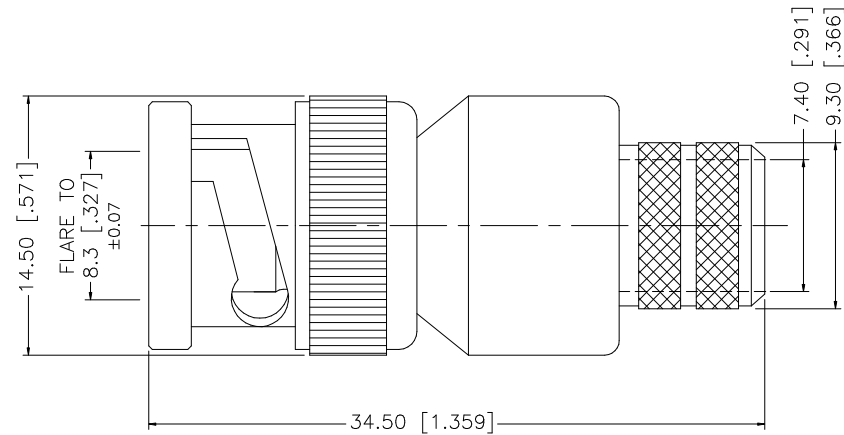


REV.	DATE	DESCRIPTION
NC	06/23/98	INITIAL RELEASE
A	02/24/03	UPDATE DRAWING FORMAT

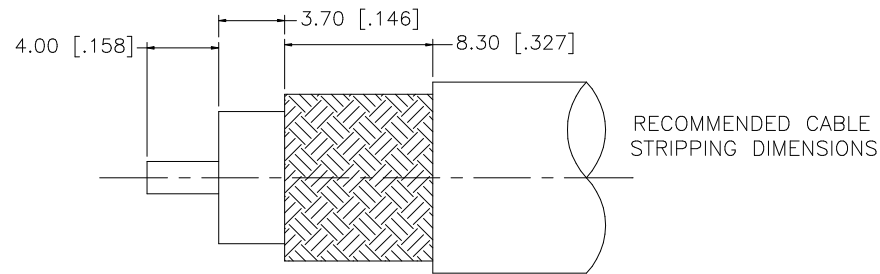

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex									
8						DRAWN	G.R.S.						07/20/05				
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED							PART DESCRIPTION	BNC CRIMP PLUG (FOR RG-214 CABLE)			
6						ISSUED											
5					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1	PART NO.	112589								
4	FERRULE	BRASS	NICKEL	1													
3	CONTACT PIN	BRASS	GOLD	1		CAD FILE	C:/112/112589.DWG		DWG. NO.	112589.DWG	REV.	A	SIZE	A	SCALE	NA	
2	INSULATOR	TEFLON	NATURAL	1		DO NOT SCALE DRAWING											
1	SHELL/BODY	BRASS	NICKEL	1													
	DESCRIPTION	MATERIAL	FINISH	QTY													