

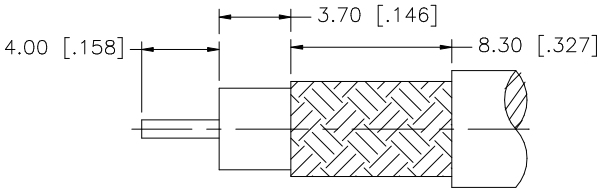
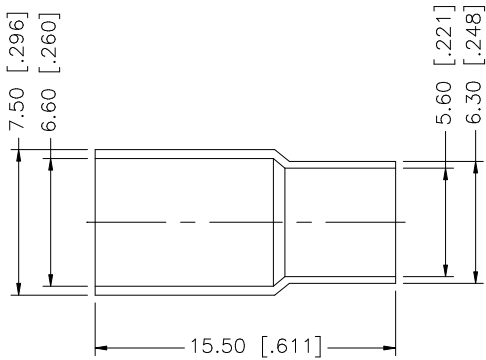


REV.	DATE	DESCRIPTION
A	06/06/05	UPDATE DRAWING FORMAT
B	01/22/07	MODIFY CONTACT PIN I.D. TO 0.9mm

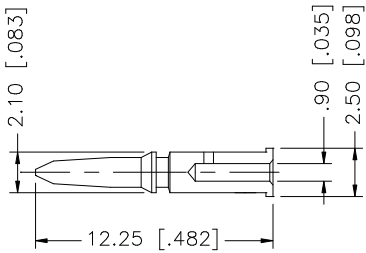

RECOMMENDED CABLE
STRIPPING DIM'S

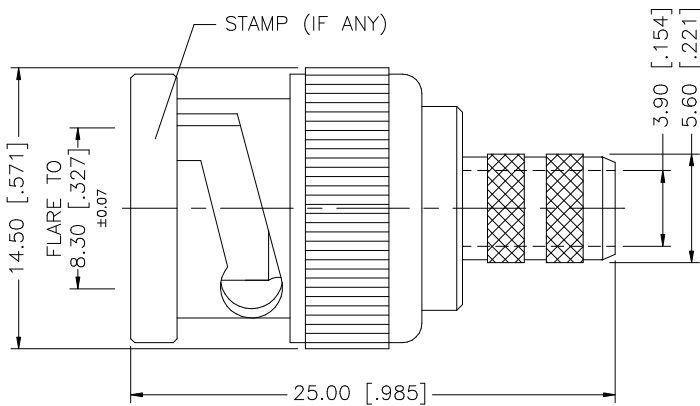

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .255"
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex					
7						DRAWN	G.R.S.	01/22/07							
6						CHECKED									PART DESCRIPTION BNC CRIMP PLUG (FOR RG-59/U 20AWG CONTACT)
5	FERRULE	COPPER	NICKEL	1		ISSUED									
4	GASKET	RUBBER	RED	1		SHEET	1 OF 1				PART NO. 112544				
3	INSULATOR	DELRIN	NATURAL	1	CAD FILE C:/112/112544.DWG										
2	CONTACT PIN	BRASS	GOLD	1						DO NOT SCALE DRAWING					
1	SHELL/BODY	BRASS	NICKEL	1	DWG. NO. 112544.DWG										REV. B
DESCRIPTION		MATERIAL	FINISH	QTY											