
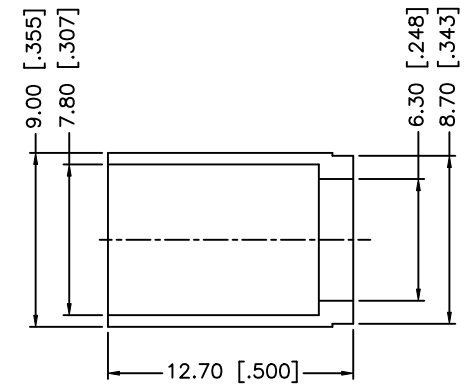
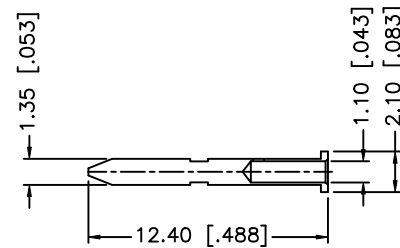
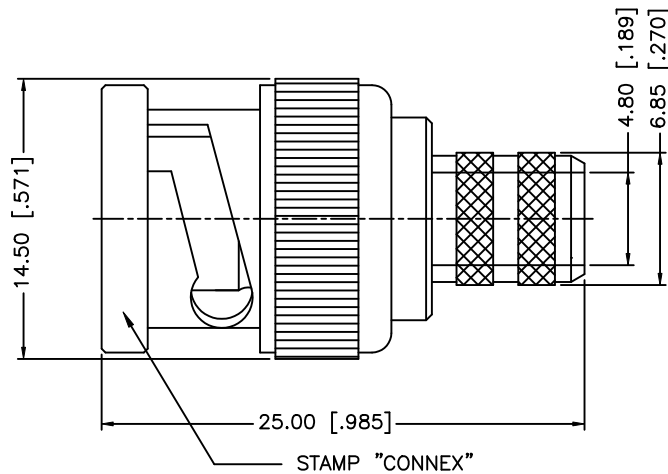


REV.	DATE	ECR NO.	DESCRIPTION
A	04/28/97	—	CHANGE GOLD PLATING SPEC.
B	09/30/08	—	UPDATE DRAWING FORMAT.

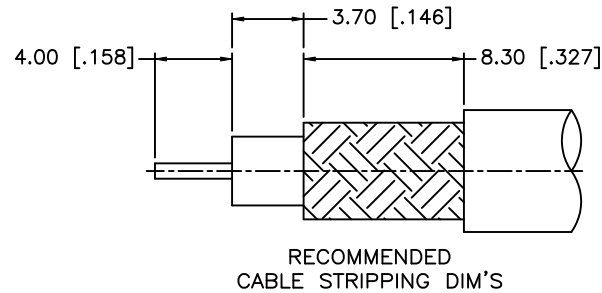

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. NICKEL PL. 100 MIN. OVER COPPER PL. 50 MIN.
2. GOLD PL. 15 MIN. OVER NICKEL PL. 50 MIN. OVER COPPER PL. 50 MIN.
3. TEFLON MIL-P-19468.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex			
8					DRAWN	GRS	09/30/08					
7					CHECKED				PART DESCRIPTION BNC CRIMP PLUG (RG–6 PLENUM/ BELDEN 1695A – 75 ohms)			
6					ISSUED							
5					SHEET	1 OF 1						
4	FERRULE	BRASS	NICKEL	1								
3	CONTACT PIN	BRASS	GOLD	1					DWG. NO. 112958.DWG REV. B SIZE A SCALE NA			
2	INSULATOR	PTFE	NATURAL	1								
1	BODY	BRASS	NICKEL	1								
DESCRIPTION		MATERIAL	FINISH	QTY			CAD FILE C:/112/112958.DWG					