
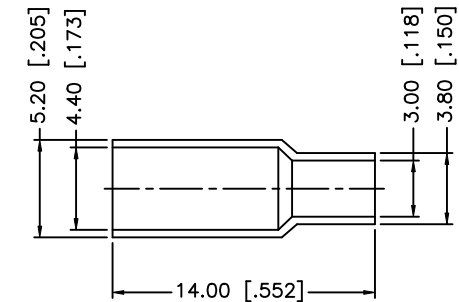


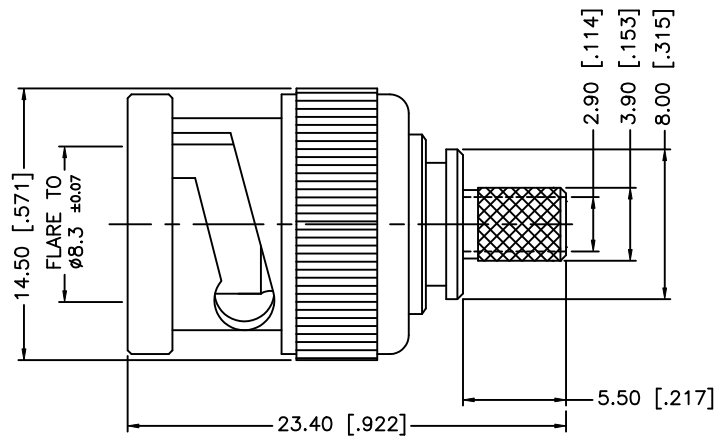


REV.	DATE	ECR NO.	DESCRIPTION
D	01/14/03	—	UPDATE DRAWING FORMAT
E	04/17/06	—	UPDATE STRIPPING DIMENSIONS
F	09/29/08	—	ADD "75 ohms" TO DESCRIPTION/ MODIFY NOTE 2

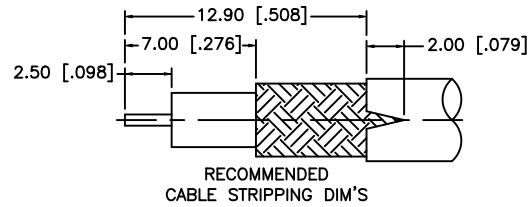

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .178" [4.52]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
8						DRAWN	GRS	09/29/08									
7						CHECKED											
6						PART DESCRIPTION					BNC CRIMP PLUG – 75 ohms (FOR 100mHz RGB CABLE)						
5	FERRULE	COPPER	NICKEL	1		ISSUED											
4	SLEEVE	DELTRIN	NATURAL	1		SHEET											
3	CONTACT PIN	BRASS	GOLD	1		1 OF 1					PART NO. 112491–10						
2	INSULATOR	PTFE	NATURAL	1		CAD FILE C:/112/112491–10.DWG											
1	BODY	BRASS	NICKEL	1	DWG. NO.					112491–10.DWG		REV.	F	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY													