

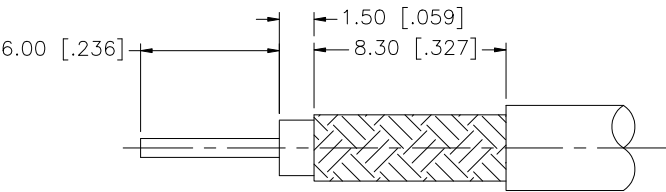
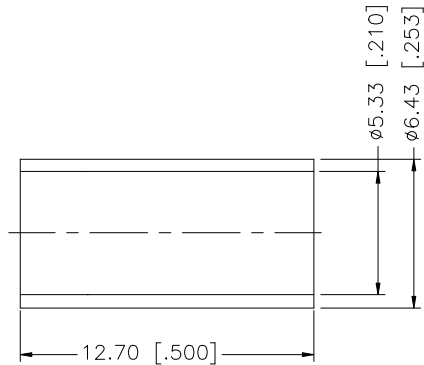


REV.	DATE	DESCRIPTION
A	01/17/00	MODIFY BODY AND CONTACT PIN
B	07/31/07	UPDATE DRAWING FORMAT

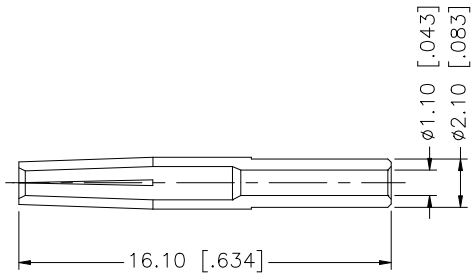

RECOMMENDED
CABLE STRIPPING DIM'S

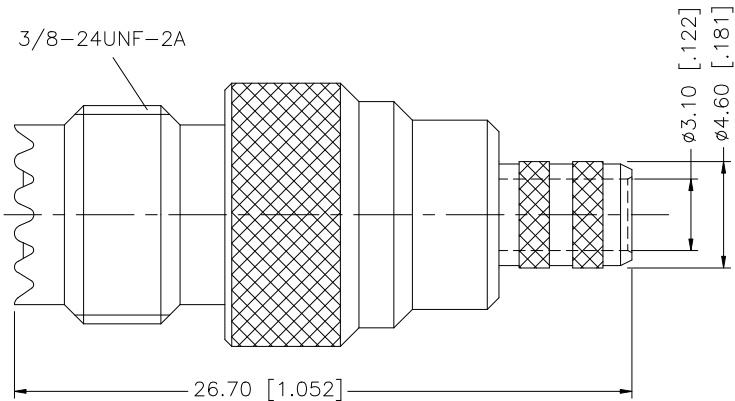

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex									
7						DRAWN	G.R.S.	07/31/07											
6						CHECKED													
5						ISSUED				PART DESCRIPTION MINI-UHF CRIMP JACK (FOR RG-58/U CABLE)									
4	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1												
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		PART NO.					182112								
2	INSULATOR	TEFLON	NATURAL	1															
1	BODY	BRASS	NICKEL	1		CAD FILE					DWG. NO.		182112.DWG	REV.	B	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY		DO NOT SCALE DRAWING													
						C:/182/182112.DWG													