
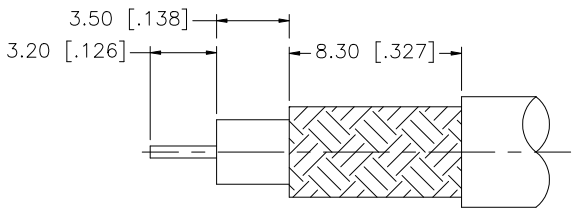


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/30/00	—	INITIAL RELEASE
A	11/22/08	—	UPDATE DRAWING FORMAT

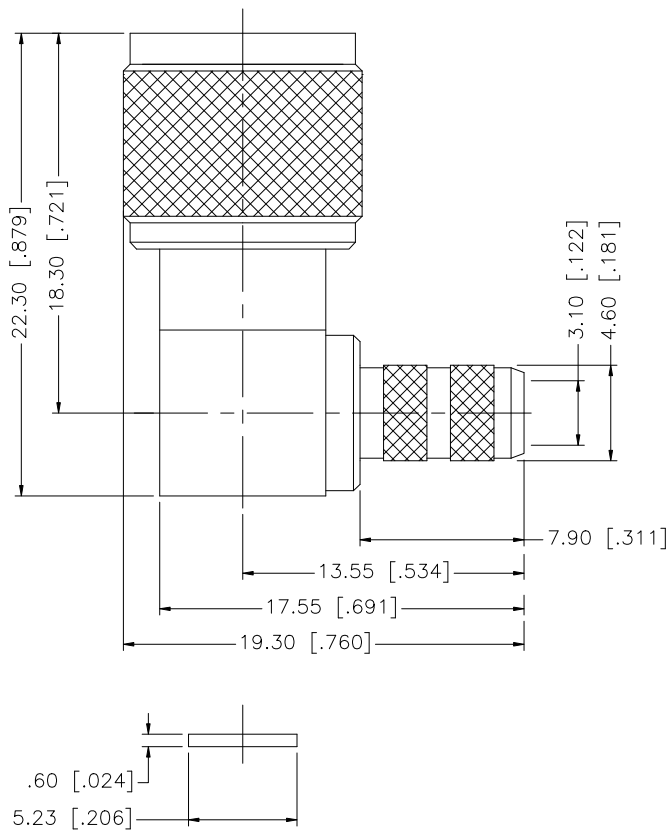

RECOMMENDED CABLE
STRIPPING DIM'S

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE.213" [5.41]

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex						
8						DRAWN	GRS	11/22/08								
7						CHECKED				PART DESCRIPTION MINI-UHF R/A CRIMP PLUG (FOR RG-58/U, 58C/U CABLE)						
6						ISSUED										
5	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		SHEET		1 OF 1		PART NO. 182323					
4	COVER	BRASS	NICKEL	1												
3	CONTACT PIN	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”						DWG. NO. 182323.DWG					
2	INSULATOR	PTFE	NATURAL	1												
1	BODY	BRASS	NICKEL	1							REV. A		SIZE A		SCALE NA	
DESCRIPTION				MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE C:/182/182323.DWG							