

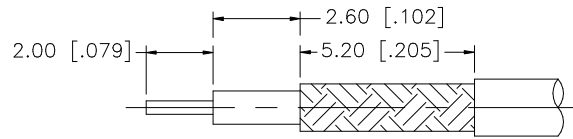





REV.	DATE	DESCRIPTION
NC	05/24/05	INITIAL RELEASE
A	04/19/06	UPDATE DRAWING FORMAT



RECOMMENDED CABLE
STRIPPING DIM'S.

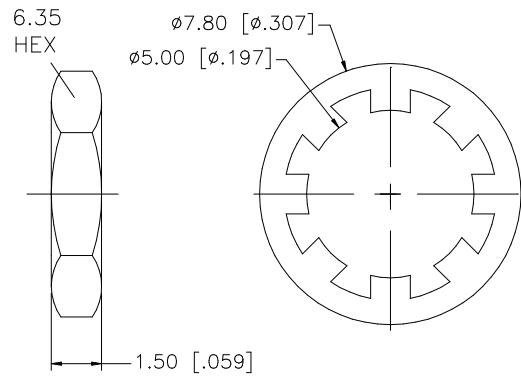

RECOMMENDED
MOUNTING HOLE

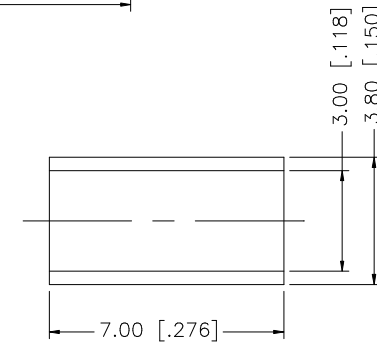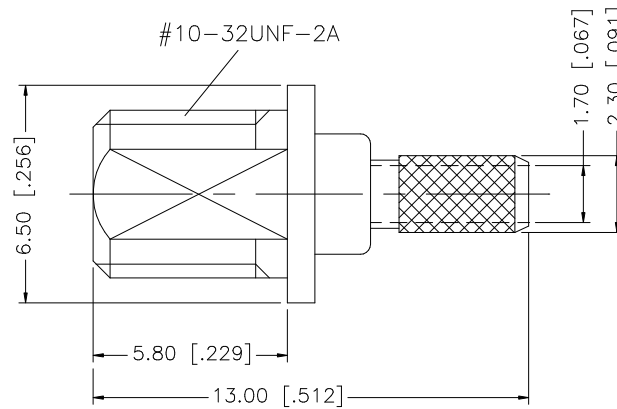

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
8						DRAWN	G.R.S.	04/19/06								
7	FERRULE	COPPER	NICKEL	1		CHECKED										
6	HEX NUT	BRASS	NICKEL	1		ISSUED				PART DESCRIPTION						
5	LOCK WASHER	BRASS	NICKEL	1		SHEET	1 OF 1				MMCX BULKHEAD CRIMP JACK (FOR RG–174/U, 188/U, 316/U CABLE)					
4	GASKET	SILICONE	RED	1						PART NO.						
3	CONTACT PIN	BER. COPPER	GOLD	1						262121						
2	INSULATOR	TEFLON	NATURAL	1						DWG. NO.						
1	BODY	BRASS	NICKEL	1						262121.DWG						
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE		C:/262/262121.DWG		REV.	A	SIZE	A	SCALE