


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/18/98	—	INITIAL RELEASE
A	09/06/06	—	REVISE FERRULE I.D./ UPDATE DRAWING FORMAT
B	12/08/08	—	REVISE NOTE 2 TO .118" HEX CRIMP

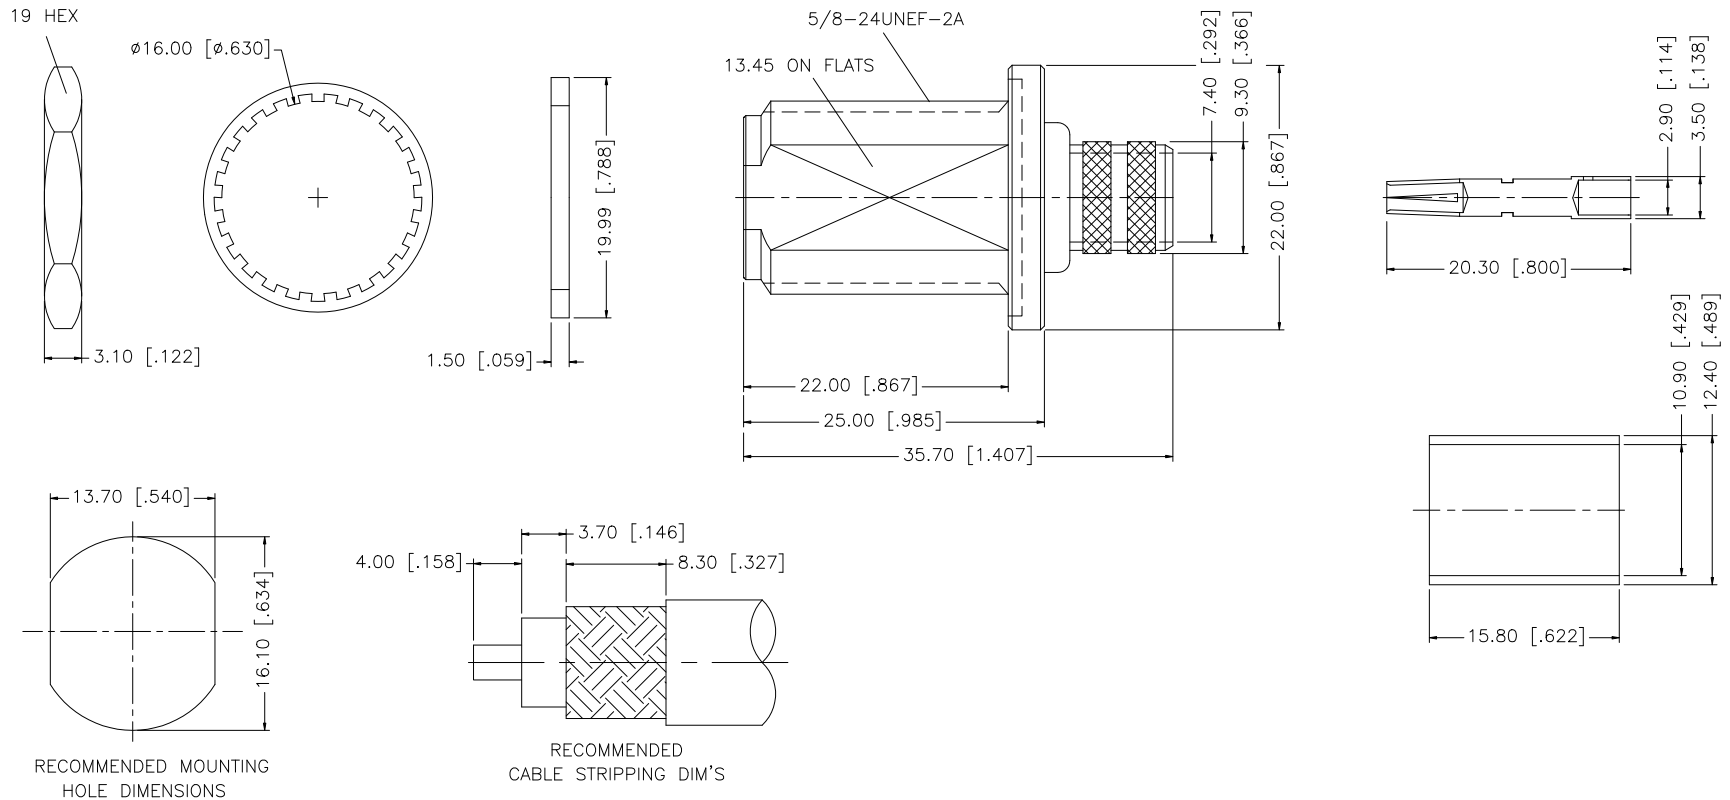

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .429" [10.90]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .118" [3.00]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	GRS	12/08/08						
7	FERRULE	COPPER	NICKEL	1		CHECKED			PART DESCRIPTION N BULKHEAD CRIMP JACK – LMR 400 (FOR BELDEN 8214, 9913, 9914)					
6	HEX NUT	BRASS	NICKEL	1		ISSUED								
5	LOCK WASHER	BRASS	NICKEL	1		SHEET	1 OF 1		PART NO. 172220					
4	GASKET	SILICONE	RED	1										
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		CAD FILE		DWG. NO. 172220.DWG REV. B SIZE A SCALE NA						
2	INSULATOR	PTFE	NATURAL	1		C:/172/172220.DWG								
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY										