

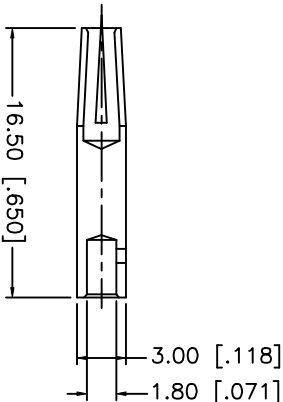
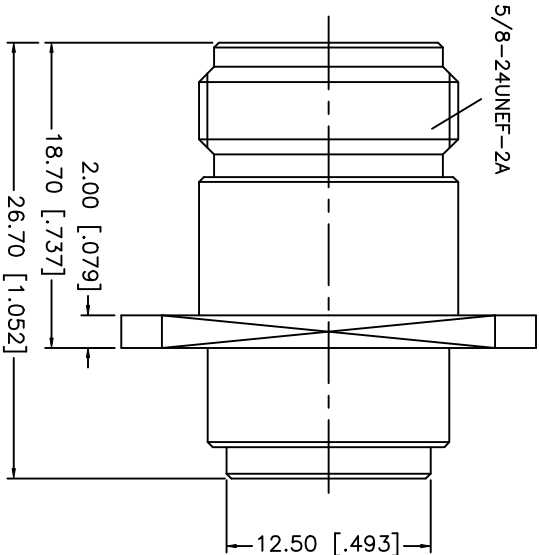
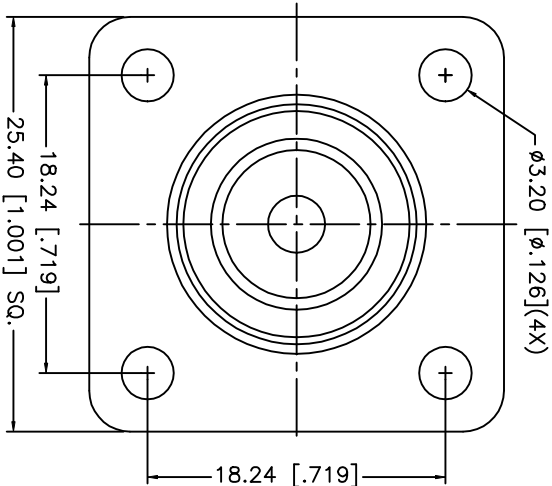



REV.	DATE	DESCRIPTION
NC	05/06/02	INITIAL RELEASE

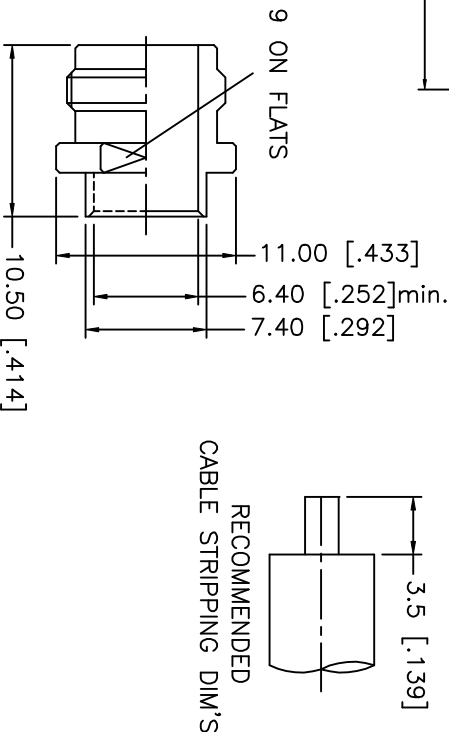

CRIMP NOTES:
 1. CRIMPED CONTACT PIN
 HEX CRIMP SIZE .100"
 OR SOLDER.



RECOMMENDED
CABLE STRIPPING DIM'S

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY		APPROVALS	DATE	TITLE			
1 OUTER BODY	BRASS	NICKEL	DRAWN		G.R.S.	05/06/02	Amphenol - Connex CONNECTOR CORPORATION N PANEL DIRECT SOLDER JACK (FOR .250" SEMI RIGID CABLE)			
2 INSULATOR	TEFLON	NATURAL	CHECKED							
3 CONTACT PIN	PHOS. BRONZE	GOLD	ISSUED							
4 SOLDER NUT	BRASS	GOLD								
5										
6							SIZE		FSQM NO.	REV.
7							A		99001	
8							SCALE		NA	NC
					DO NOT SCALE DRAWING				PART NO.	
									172300	1 OF 1
									SHEET	
									172300.DWG	