

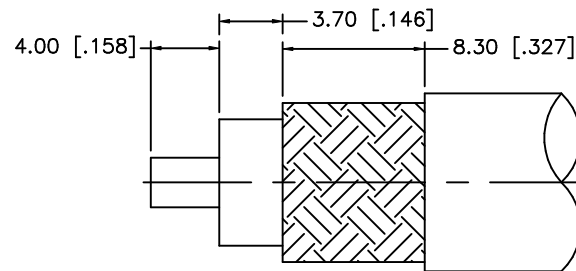
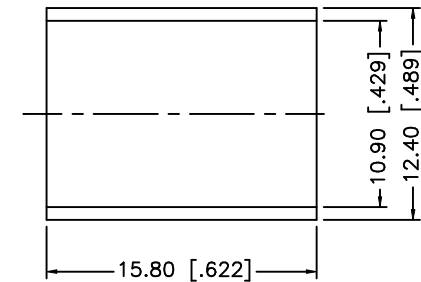


REV.	DATE	DESCRIPTION
NC	01/23/07	INITIAL RELEASE

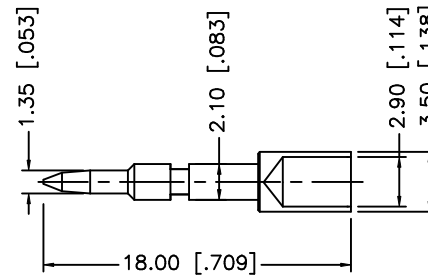

RECOMMENDED
CABLE STRIPPING DIM'S

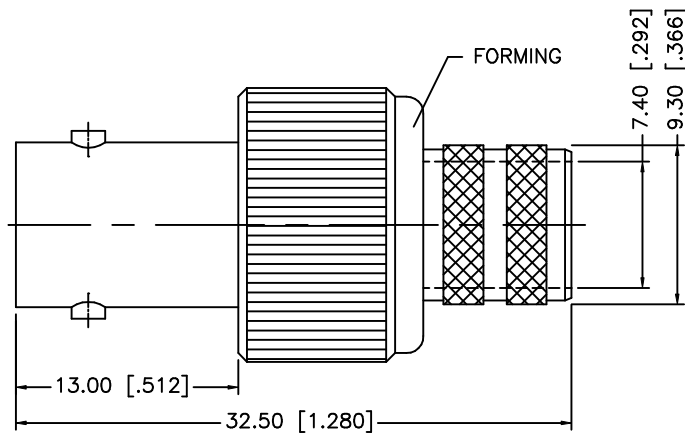

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .118"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex								
8						DRAWN	G.R.S.						01/23/07			
7						CHECKED										
6						ISSUED			PART DESCRIPTION							
5						SHEET	1 OF 1		BNC REVERSE POLARITY CRIMP JACK (FOR LMR400, BELDEN 8214, 9913, 9914)							
4	FERRULE	COPPER	NICKEL	1					PART NO.							
3	CONTACT PIN	BRASS	GOLD	1					112603RP							
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO.							
1	BODY	BRASS	NICKEL	1					112603RP.DWG							
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE			DWG. NO.		112603RP.DWG	REV.	NC	SIZE	A	SCALE