

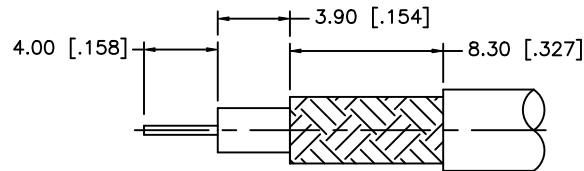
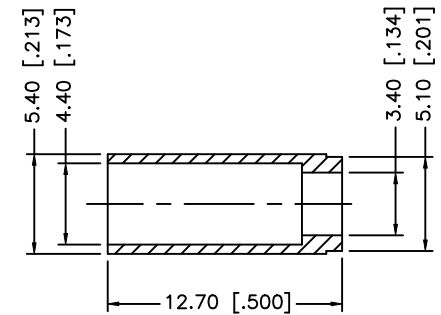


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/07/09	—	INITIAL RELEASE

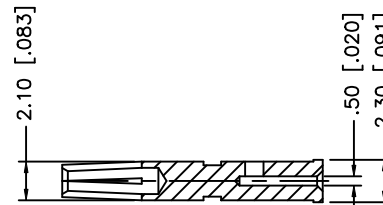

RECOMMENDED CABLE
STRIPPING DIM'S

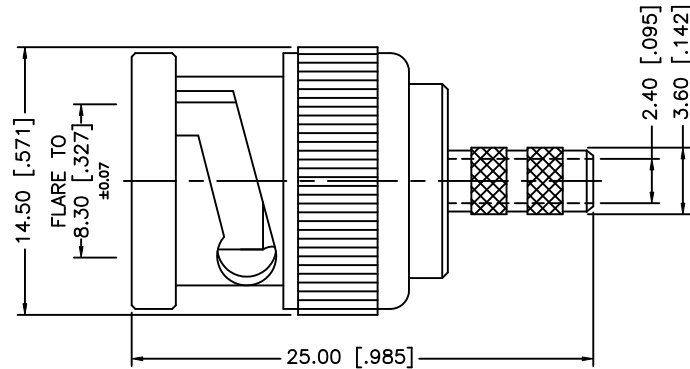

NOTES:

1. CRIMPED FERRULE HEX. CRIMP SIZE .178" [4.52]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.72]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex										
8						DRAWN	GRS	01/07/09												
7						CHECKED														
6						PART DESCRIPTION					BNC PLUG, REVERSE POLARIZED (FOR 735A CABLE)									
5																ISSUED				
4	FERRULE	COPPER	NICKEL	1												SHEET	1 OF 1			
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		PART NO.					112950RP									
2	INSULATOR	PTFE	NATURAL	1																
1	BODY	BRASS	NICKEL	1																
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE					DWG. NO.	112950RP.DWG		REV.	NC	SIZE	A	SCALE	NA	
					C:/112/112950RP.DWG															