



REV.	DATE	ECR NO.	DESCRIPTION
NC	04/12/12	XXXXXX	INITIAL RELEASE

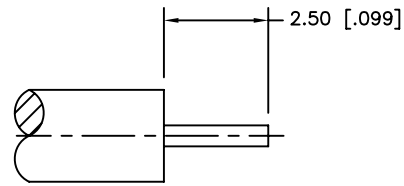

RECOMMENDED
CABLE STRIPPING DIM'S

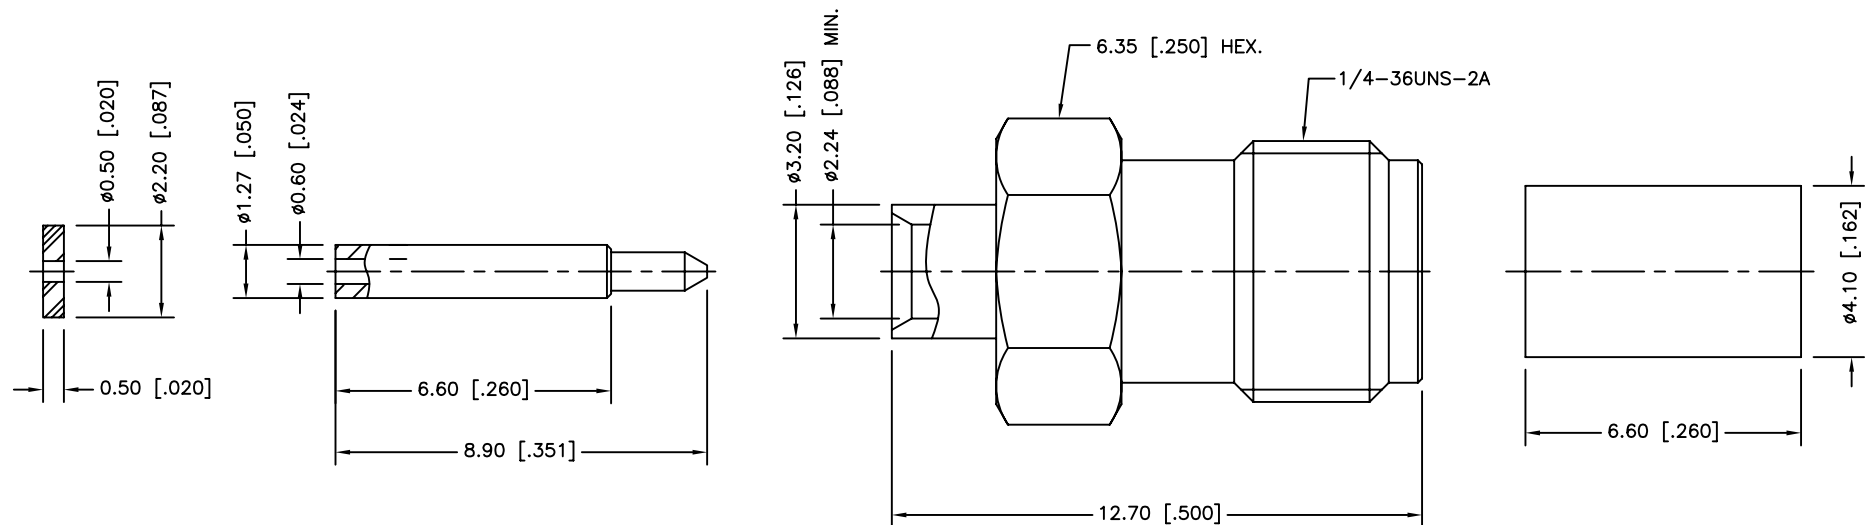

1. CONTACT PIN TO SOLDER

4	INSULATOR	PTFE	NATURAL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:

0.5 - 8mm	± 0.20mm
8 - 30mm	± 0.40mm
30 - 120mm	± 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:

.020 - .315	= ± 0.007"
.315 - 1.180	= ± 0.015"
1.180 - 4.724	= ± 0.020"

DO NOT SCALE DRAWING

	APPROVALS	DATE
DRAWN	M.ZHANG	04/12/12
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE		
C:/CONNEX/132103RP.DWG		

Amphenol Connex

[illegible]

SMA REVERSE POLARITY DIRECT SOLDER JACK
(FOR .085", .086" SEMI-RIGID CABLE)

	PART NO.
--	----------

132103RP

DWG. NO.

132103RP.DWG

REV. NC

SIZE	A
------	---

SCALE	NA
-------	----