
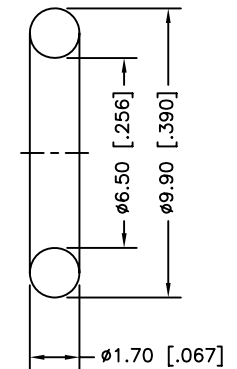
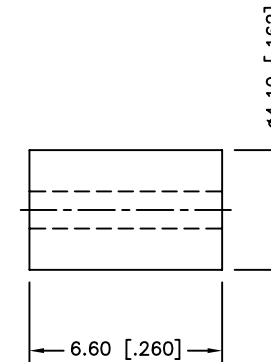
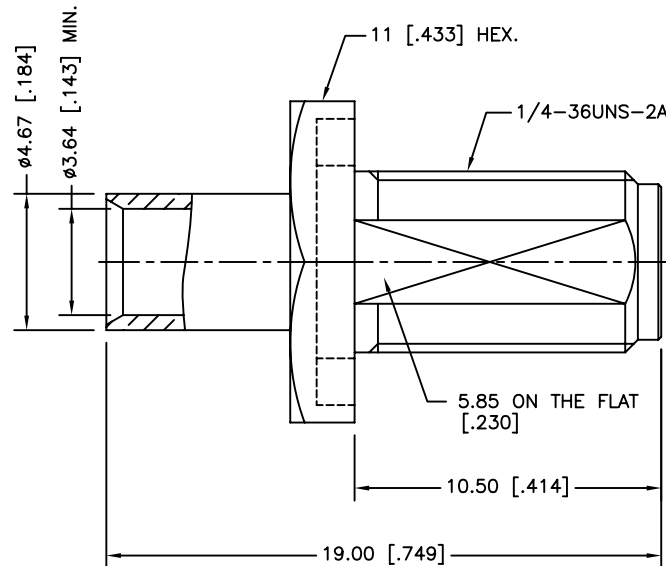

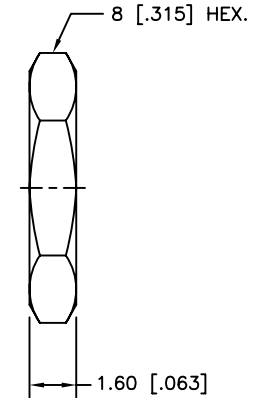


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/02/08	XXXXXX	INITIAL RELEASE
A	04/21/12	XXXXXX	ADD RECOMMENDED MOUNTING HOLE

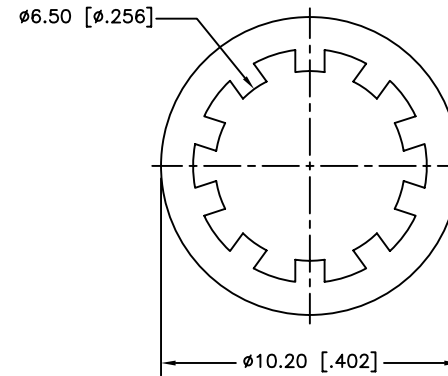

1. CONTACT PIN TO SOLDER
2. MAX. PANEL THICKNESS=2.4mm

6	HEX NUT	BRASS	GOLD	1
5	LOCK WASHER	BRASS	GOLD	1
4	GASKET	SILICON RUBBER	RED	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
DESCRIPTION	MATERIAL	FINISH	QTY	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	04/21/12
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/132106RP.DWG	

Amphenol Connex

PART DESCRIPTION
SMA REVERSE POLARITY DIRECT SOLDER BULKHEAD JACK (FOR .141" SEMI-RIGID CABLE)
PART NO.
132106RP
DWG. NO.
132106RP.DWG
REV.
A
SIZE
A
SCALE
NA