

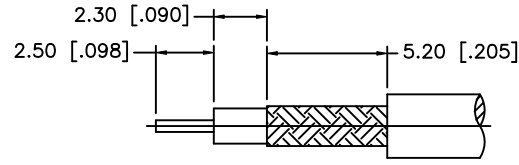
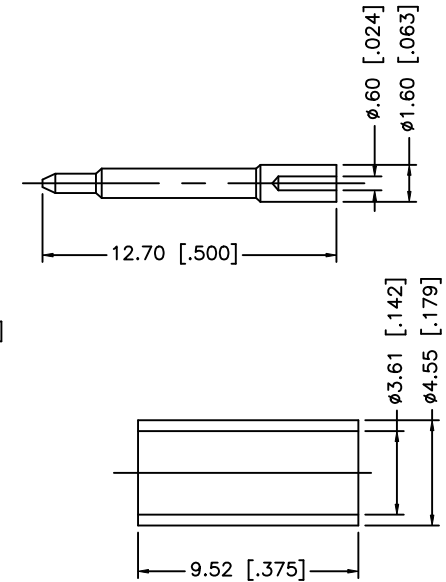


RECOMMENDED
MOUNTING HOLES

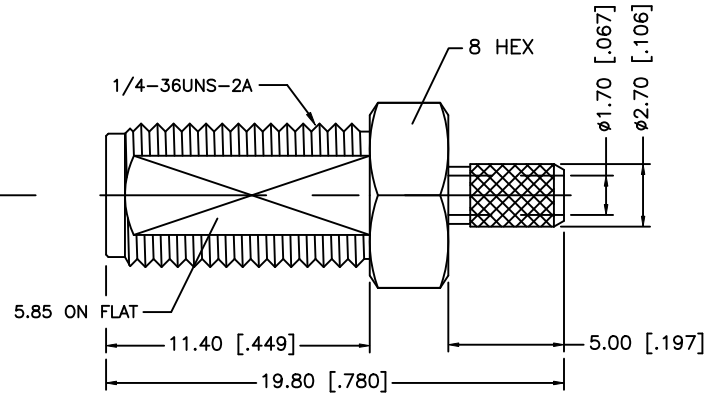

RECOMMENDED
CABLE STRIPPING DIM'S

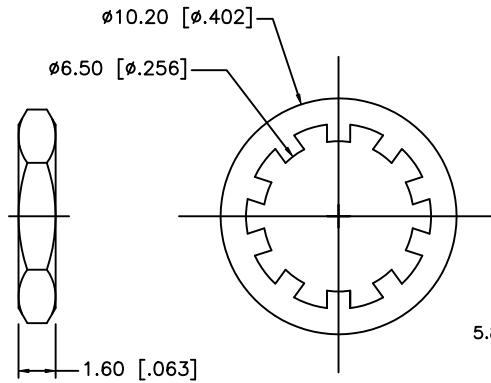

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .151" [3.83]
2. CONTACT PIN TO SOLDER.
3. MAX. PANEL THICKNESS OF 3.20 [1.26"]

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex PART DESCRIPTION SMA REVERSE POLARITY BULKHEAD CRIMP JACK (FOR 316/U DOUBLE BRAID CABLE)					
7	HEAT SHRINK TUBING		BLK	A/R		DRAWN	GRS	09/17/08							
6	FERRULE	COPPER	GOLD	1		CHECKED			PART NO.						
5	HEX NUT	BRASS	GOLD	1		ISSUED									
4	LOCK WASHER	BRASS	GOLD	1		SHEET	1 OF 1				PART NO.				
3	CONTACT PIN	BRASS	GOLD	1											
2	INSULATOR	PTFE	NATURAL	1		CAD FILE				DWG. NO.					
1	BODY	BRASS	GOLD	1		C:/132/132176RP.DWG									
DESCRIPTION		MATERIAL	FINISH	QTY	132176RP										
					DWG. NO.		132176RP.DWG		REV.	NC	SIZE	A	SCALE	NA	