

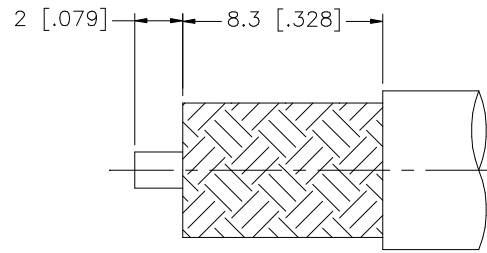
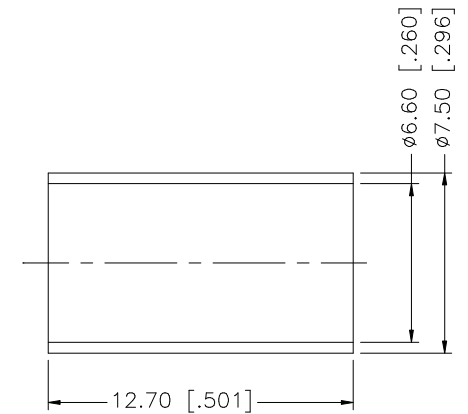


REV.	DATE	DESCRIPTION
NC	01/08/07	INITIAL RELEASE

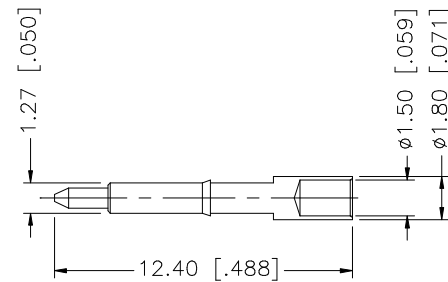

RECOMMENDED
CABLE STRIPPING DIM'S

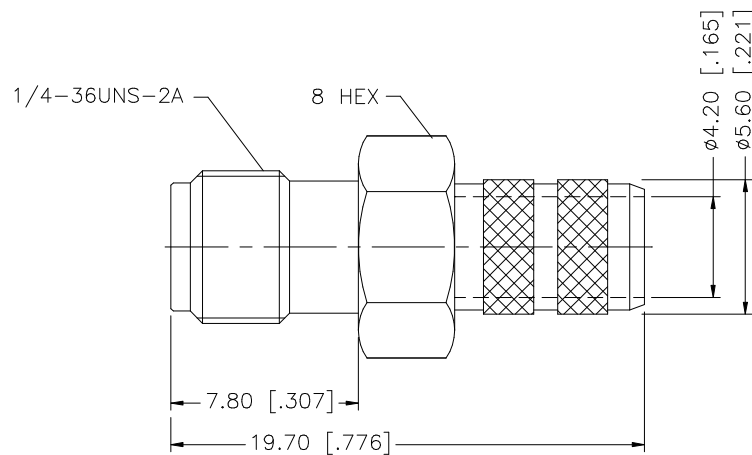

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .255.
2. CONTACT PIN TO SOLDER.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex			
8					DRAWN	G.R.S.	01/08/07					
7					CHECKED			PART DESCRIPTION SMA REVERSE POLARITY CRIMP JACK (FOR RG–8/X, LMR240)				
6					ISSUED							
5					SHEET	1 OF 1						PART NO. 132240RP
4	FERRULE	COPPER	GOLD		1			DWG. NO. 132240RP.DWG REV. NC SIZE A SCALE NA				
3	CONTACT PIN	BER. COPPER	GOLD		1							
2	INSULATOR	TEFLON	NATURAL		1							
1	BODY	BRASS	GOLD	1	CAD FILE C:/132/132240RP.DWG							
	DESCRIPTION	MATERIAL	FINISH	QTY								