


REV.	DATE	DESCRIPTION
NC	10/20/05	INITIAL RELEASE

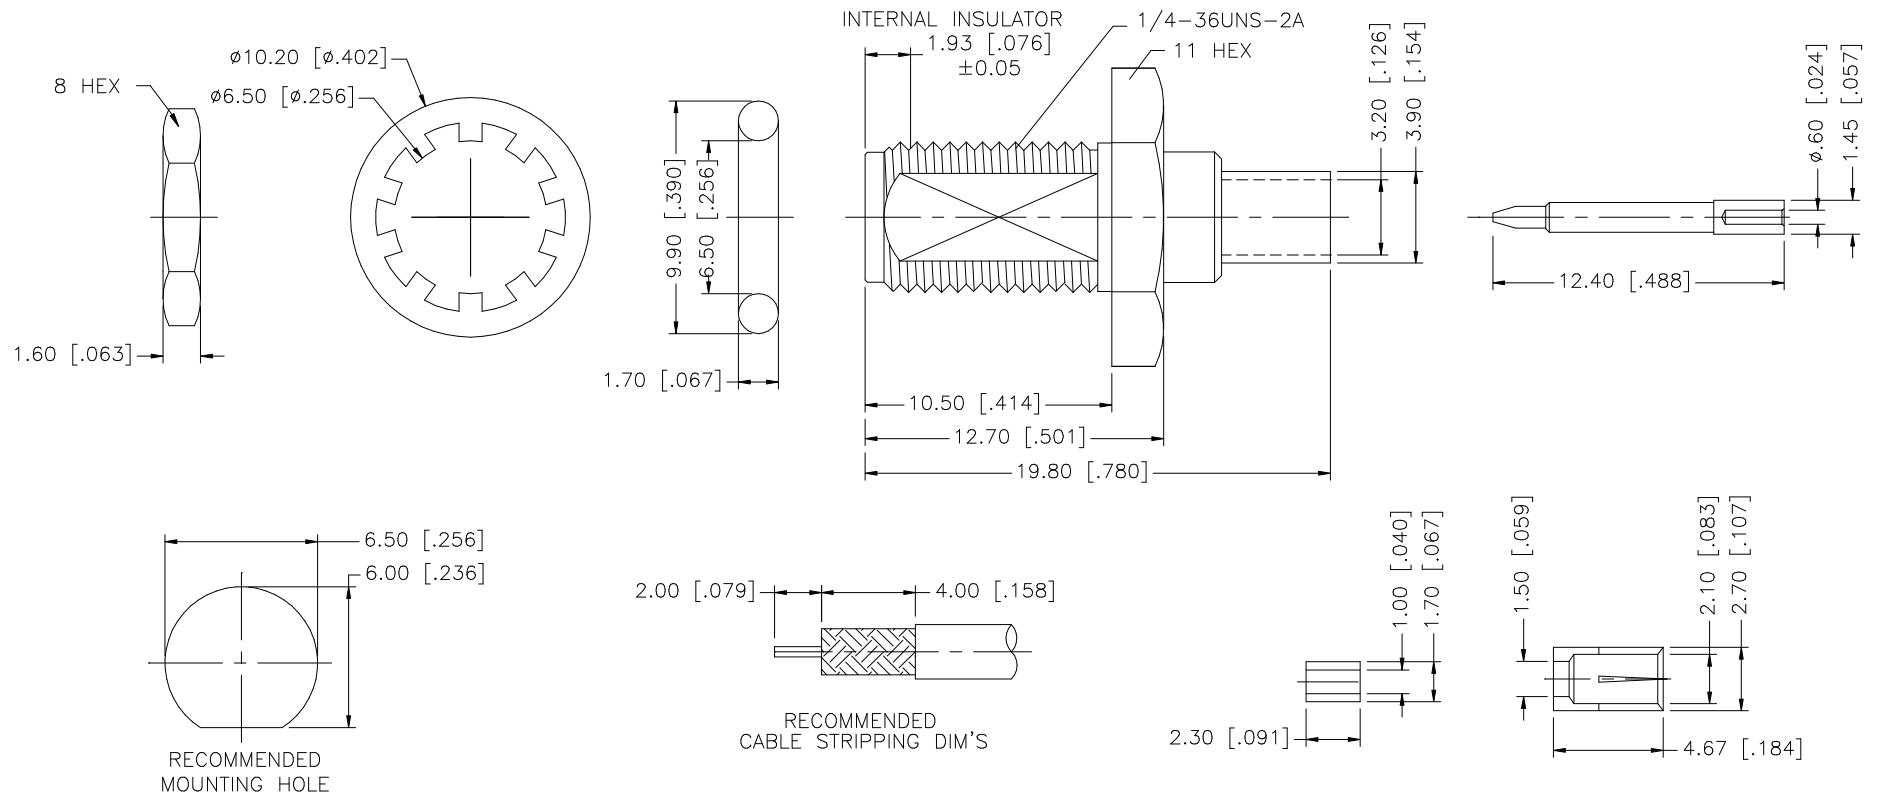

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER.

REV.	DATE	DESCRIPTION
NC	10/20/05	INITIAL RELEASE
8		
7	FERRULE	BRASS
6	HEX NUT	BRASS
5	LOCK WASHER	BRASS
4	GASKET	SILICONE
3	CONTACT PIN	BRASS
2	INSULATOR	TEFLON
1	BODY	BRASS
DESCRIPTION	MATERIAL	FINISH
QTY		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:		
0.5 - 8mm ± 0.20 mm		
8 - 30mm ± 0.40 mm		
30 - 120mm ± 0.50 mm		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:		
.020 - .315 ± 0.007 "		
.315 - 1.180 ± 0.015 "		
1.180 - 4.724 ± 0.020 "		
DO NOT SCALE DRAWING		
APPROVALS		
DATE		
DRAWN G.R.S. 10/20/05		
CHECKED		
ISSUED		
SHEET 1 OF 1		
CAD FILE C:/132/132286RP.DWG		
PART DESCRIPTION		
SMA R/P BULKHEAD CRIMP JACK (FOR RG-178B/U, 196A/U CABLE)		
PART NO. 132286RP		
DWG. NO. 132286RP.DWG		
REV. B		
SIZE A		
SCALE NA		

Amphenol Connex