

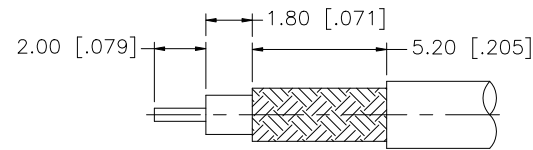
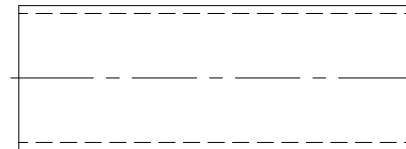
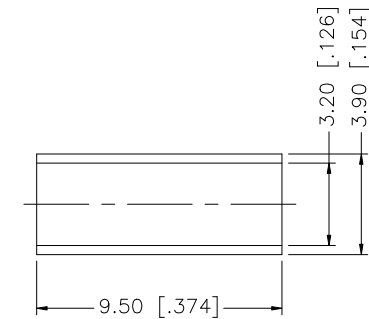


REV.	DATE	ECR NO.	DESCRIPTION
A	01/22/04	—	UPDATE DRAWING FORMAT
B	04/23/08	100009	MODIFY BARREL O.D., FERRULE O.D. AND I.D.



RECOMMENDED
CABLE STRIPPING DIM'S

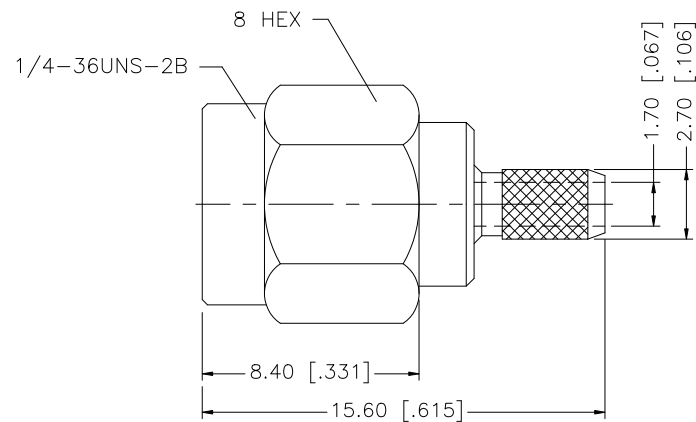

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
8						DRAWN	GRS	04/23/08									
7						CHECKED											
6						ISSUED				PART DESCRIPTION SMA REVERSE POLARITY CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U CABLE)							
5	HEAT SHRINK TUBING			1		SHEET	1 OF 1										
4	FERRULE	COPPER	GOLD	1													
3	CONTACT PIN	BER. COPPER	GOLD	1					PART NO. 132114RP								
2	INSULATOR	PTFE	NATURAL	1													
1	BODY	BRASS	GOLD	1													
DESCRIPTION		MATERIAL	FINISH	QTY		CAD FILE C:/132/132114RP.DWG			DWG. NO.		132114RP.DWG		REV.	B	SIZE	A	SCALE