

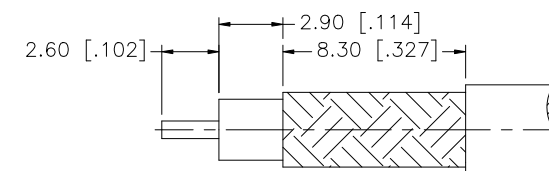
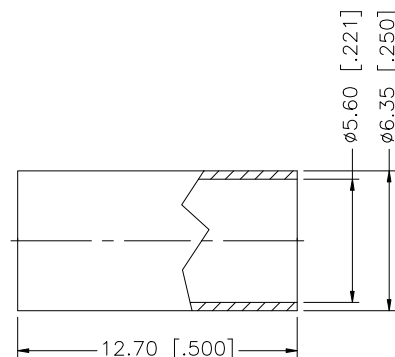


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/28/99	—	INITIAL RELEASE
A	12/16/08	100064	UPDATE DRAWING FORMAT

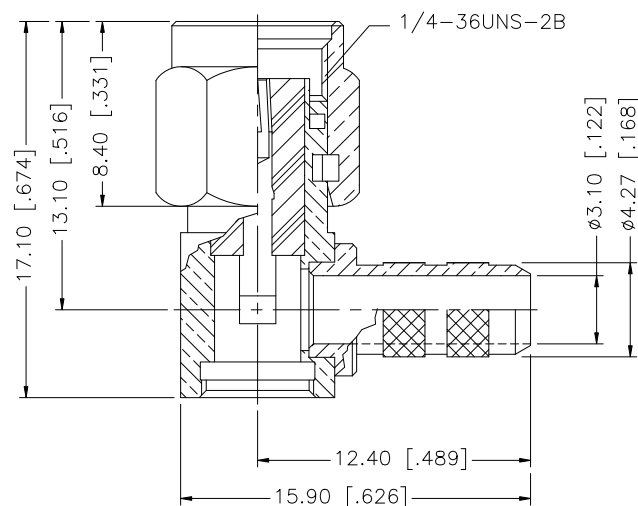

RECOMMENDED
CABLE STRIPPING DIM'S



NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213" [5.41]
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex PART DESCRIPTION SMA R/A CRIMP PLUG – REVERSE POLARITY (FOR RG223/U, 400/U CABLE)						
8	FERRULE	COPPER	GOLD	1		DRAWN	GRS	12/16/08								
7	COVER	BRASS	GOLD	1		CHECKED										
6	GASKET	SILICONE	RED	1		ISSUED			PART NO. 132194RP							
5	RETAINER RING	BER. COPPER	NATURAL	1		SHEET	1 OF 1									
4	CONTACT PIN	BER. COPPER	GOLD	1		DWG. NO. 132194RP.DWG					REV.	A	SIZE	A	SCALE	NA
3	INSULATOR	PTFE	NATURAL	1												
2	HOUSING	BRASS	GOLD	1												
1	BODY/SHELL	BRASS	GOLD	1												
DESCRIPTION		MATERIAL	FINISH	QTY												

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"