


REV.	DATE	ECR NO.	DESCRIPTION
A	04/30/03	XXXXXX	UPDATE DRAWING FORMAT
B	01/12/12	2271	ADD NOTES

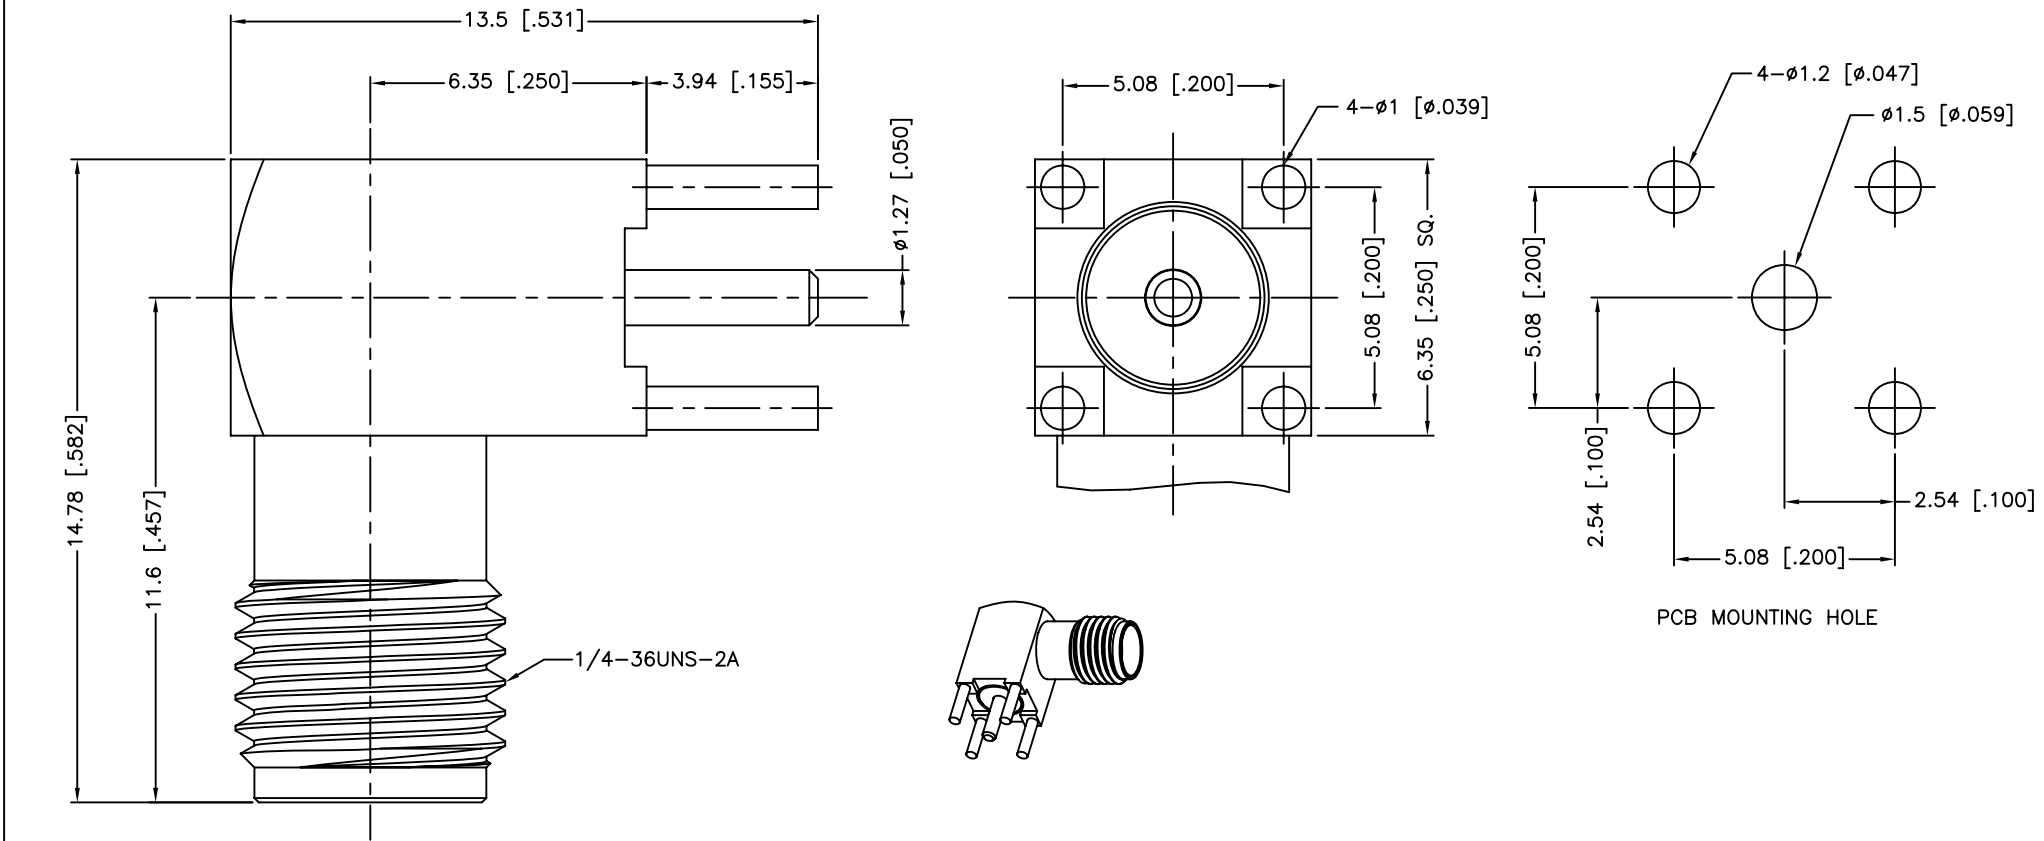

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC - 18 GHz
3. VSWR: 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -65°C TO +165°C

3 CONTACT PIN 2 INSULATOR 1 BODY				BER. COPPER PTFE ZINC DIECAST				GOLD NATURAL GOLD				1 1 1			
DESCRIPTION				MATERIAL				FINISH				QTY			
DO NOT SCALE DRAWING				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"			
APPROVALS				DATE				DRAWN				M.ZHANG			
CHECKED				ISSUED				SHEET				1 OF 1			
CAD FILE				C:/CONNEX/132225.DWG				PART DESCRIPTION				SMA R/A P.C. MOUNT JACK			
DWG. NO.				132225.DWG				PART NO.				132225			
REV.				B				SIZE				A			
SCALE				NA				Amphenol Connex							