




REV.	DATE	DESCRIPTION
NC	04/31/03	INITIAL RELEASE
A	10/27/05	MODIFY – INSULATOR NOW INTERNAL

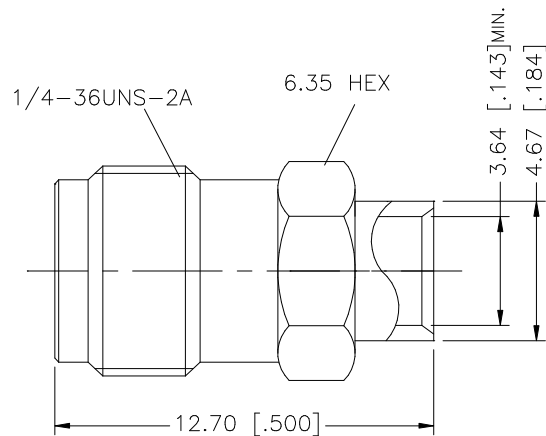

RECOMMENDED CABLE
STRIPPING DIMS.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
8					DRAWN	G.R.S.	10/27/05									
7					CHECKED			PART DESCRIPTION SMA DIRECT SOLDER JACK (FOR .141” SEMI-RIGID CABLE)								
6					ISSUED											
5					SHEET	1 OF 1		PART NO. 132104								
4																
3	CONTACT PIN	BER. COPPER	GOLD		1	CAD FILE		C:/132/132104.DWG		DWG. NO.	132104.DWG	REV.	A	SIZE	A	SCALE
2	INSULATOR	TEFLON	NATURAL	1												
1	BODY	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY												