


REV.	DATE	DESCRIPTION
B	01/12/98	ADD INSULATOR/ STRIPPING DIM'S
C	02/11/99	MODIFY 'O'-RING DIMENSIONS
D	01/29/03	UPDATE DRAWING FORMAT

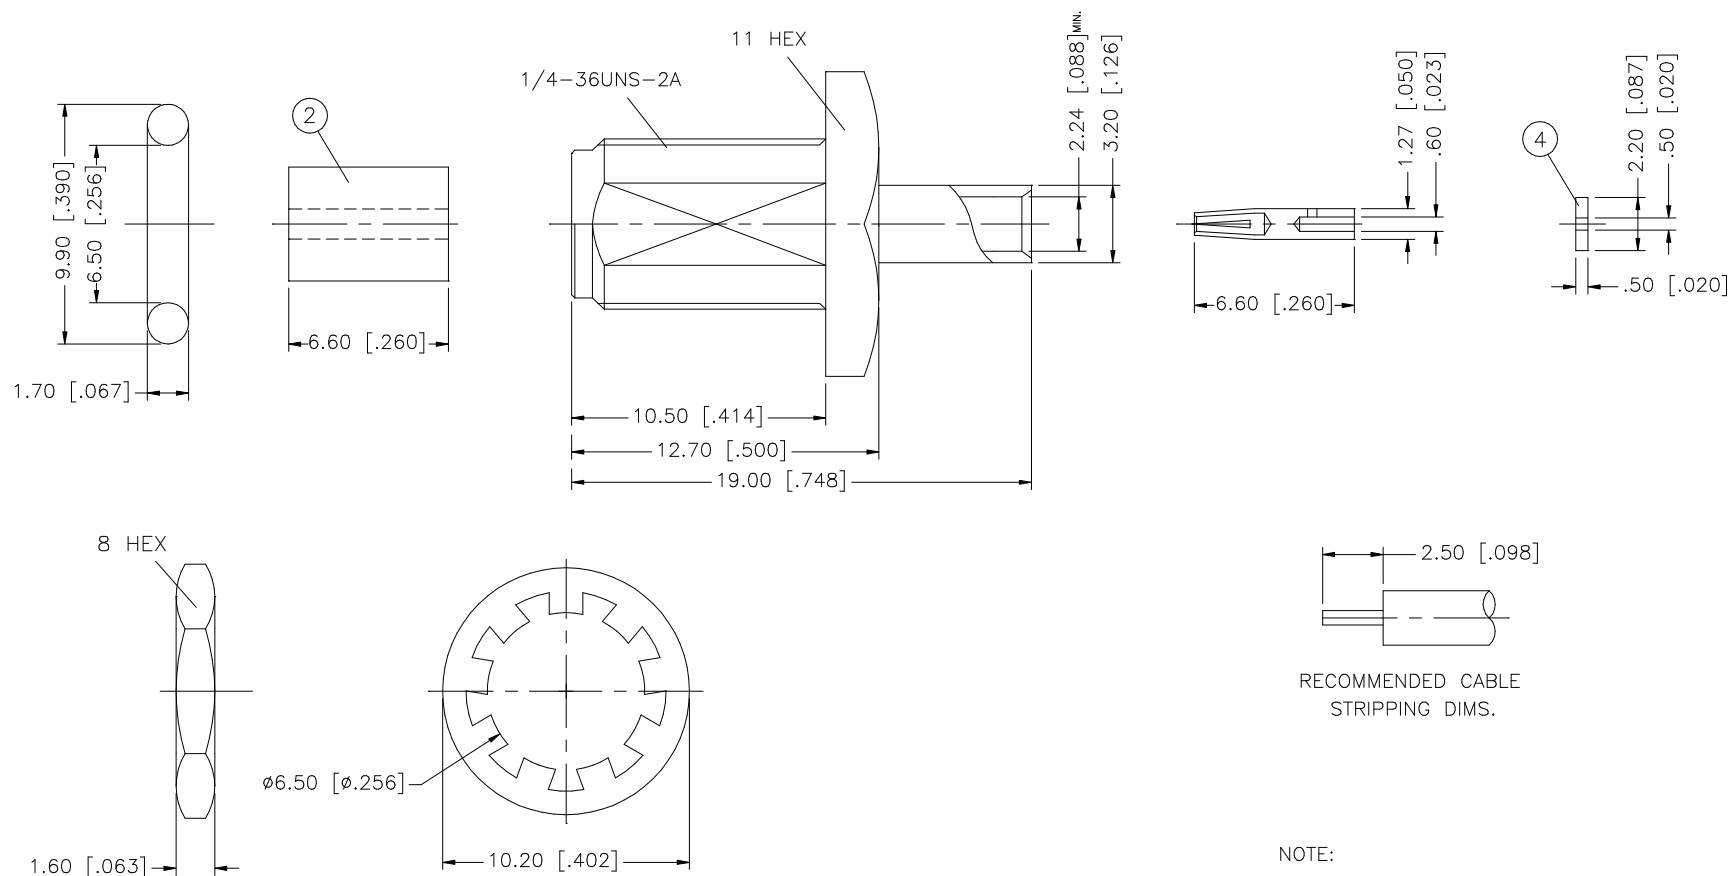

NOTE:

1. CONTACT PIN TO SOLDER
2. MAX. PANEL THICKNESS = 2.4mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex								
8						DRAWN	G.R.S.						01/29/03			
7	FERRULE	BRASS	GOLD			CHECKED								PART DESCRIPTION		
6	LOCK WASHER	BRASS	GOLD	1						SMA DIRECT SOLDER BULKHEAD JACK (FOR .085”, .086” SEMI–RIGID CABLE)						
5	GASKET	SILICONE	RED	1						PART NO.						
4	INSULATOR	TEFLON	NATURAL	1						132105						
3	CONTACT PIN	BER. COPPER	GOLD	1												
2	INSULATOR	TEFLON	NATURAL	1												
1	BODY	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/132/132105.DWG		DWG. NO.	132105.DWG	REV.	D	SIZE	A	SCALE	NA