


REV.	DATE	DESCRIPTION
NC	02/24/03	INITIAL RELEASE

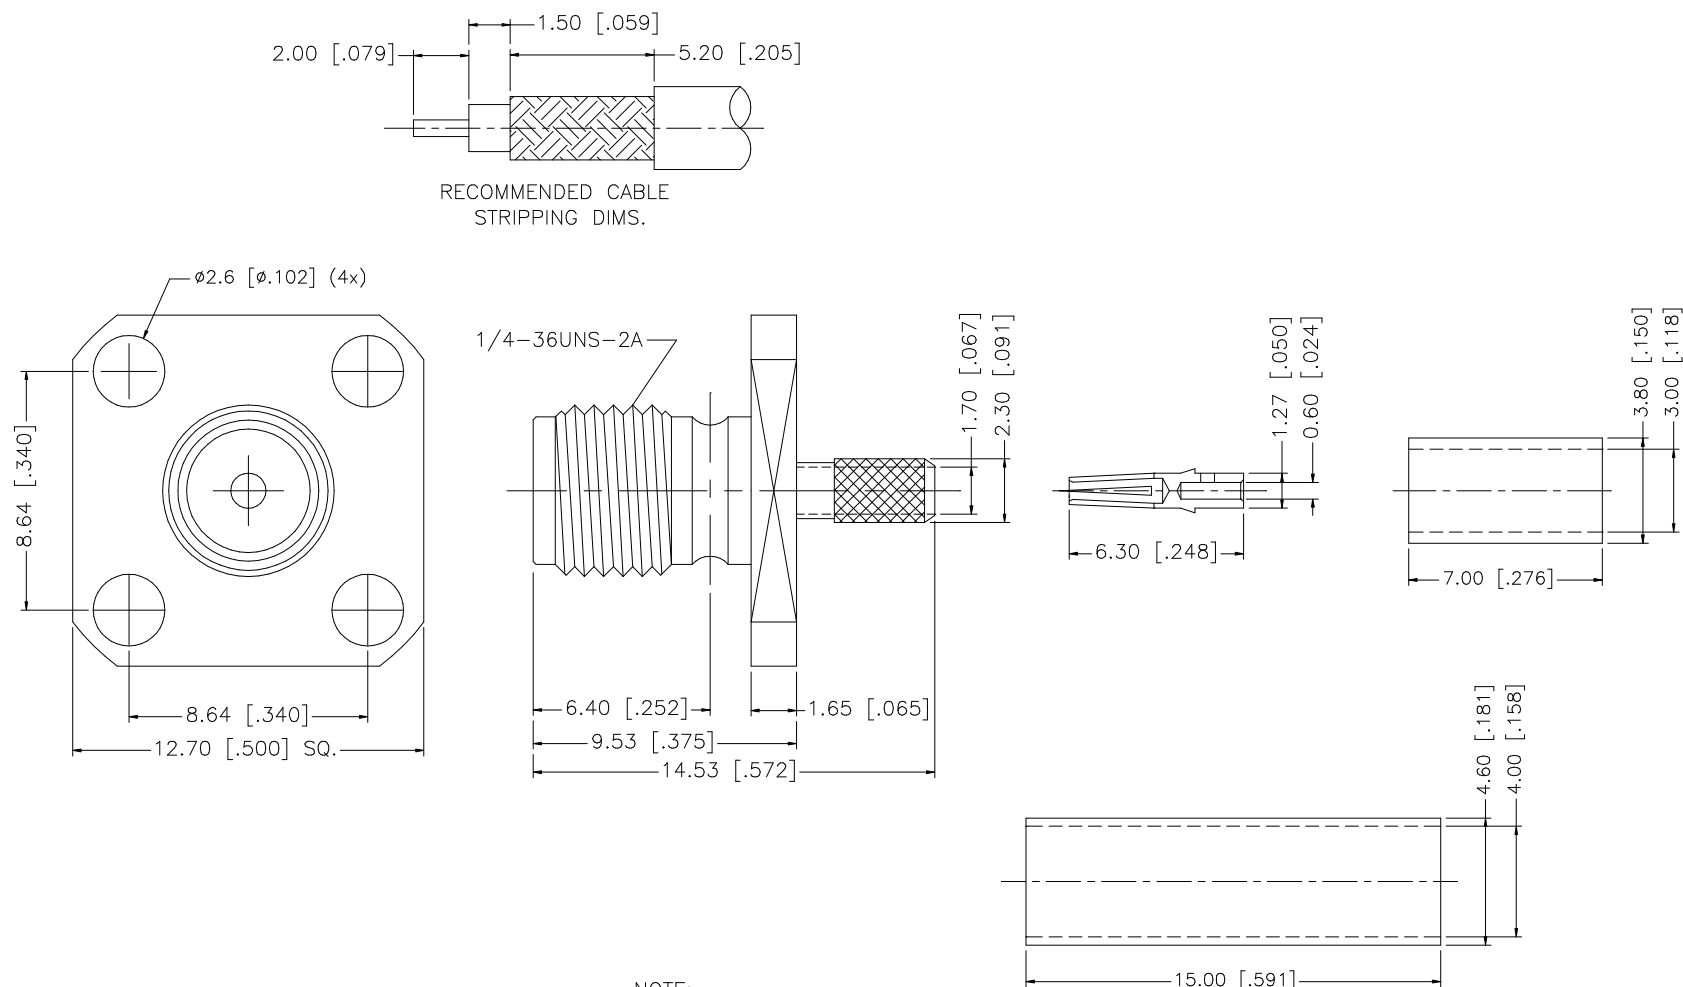

RECOMMENDED CABLE
STRIPPING DIMS.

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
8						DRAWN	G.R.S.						02/24/03	
7						CHECKED			PART DESCRIPTION SMA PANEL CRIMP JACK (FOR RG-174/U, 188A/U, 316/U)					
6						ISSUED								
5	HEAT SHRINK TUBE			1			SHEET	1 OF 1		PART NO. 132121				
4	FERRULE	COPPER	GOLD	1										
3	CONTACT PIN	BER. COPPER	GOLD	1					DWG. NO. 132121.DWG					
2	INSULATOR	TEFLON	NATURAL	1										
1	BODY	BRASS	GOLD	1					REV.	NC	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/132/132121.DWG							