


REV.	DATE	DESCRIPTION
A	11/12/03	MODIFY BODY LENGTH

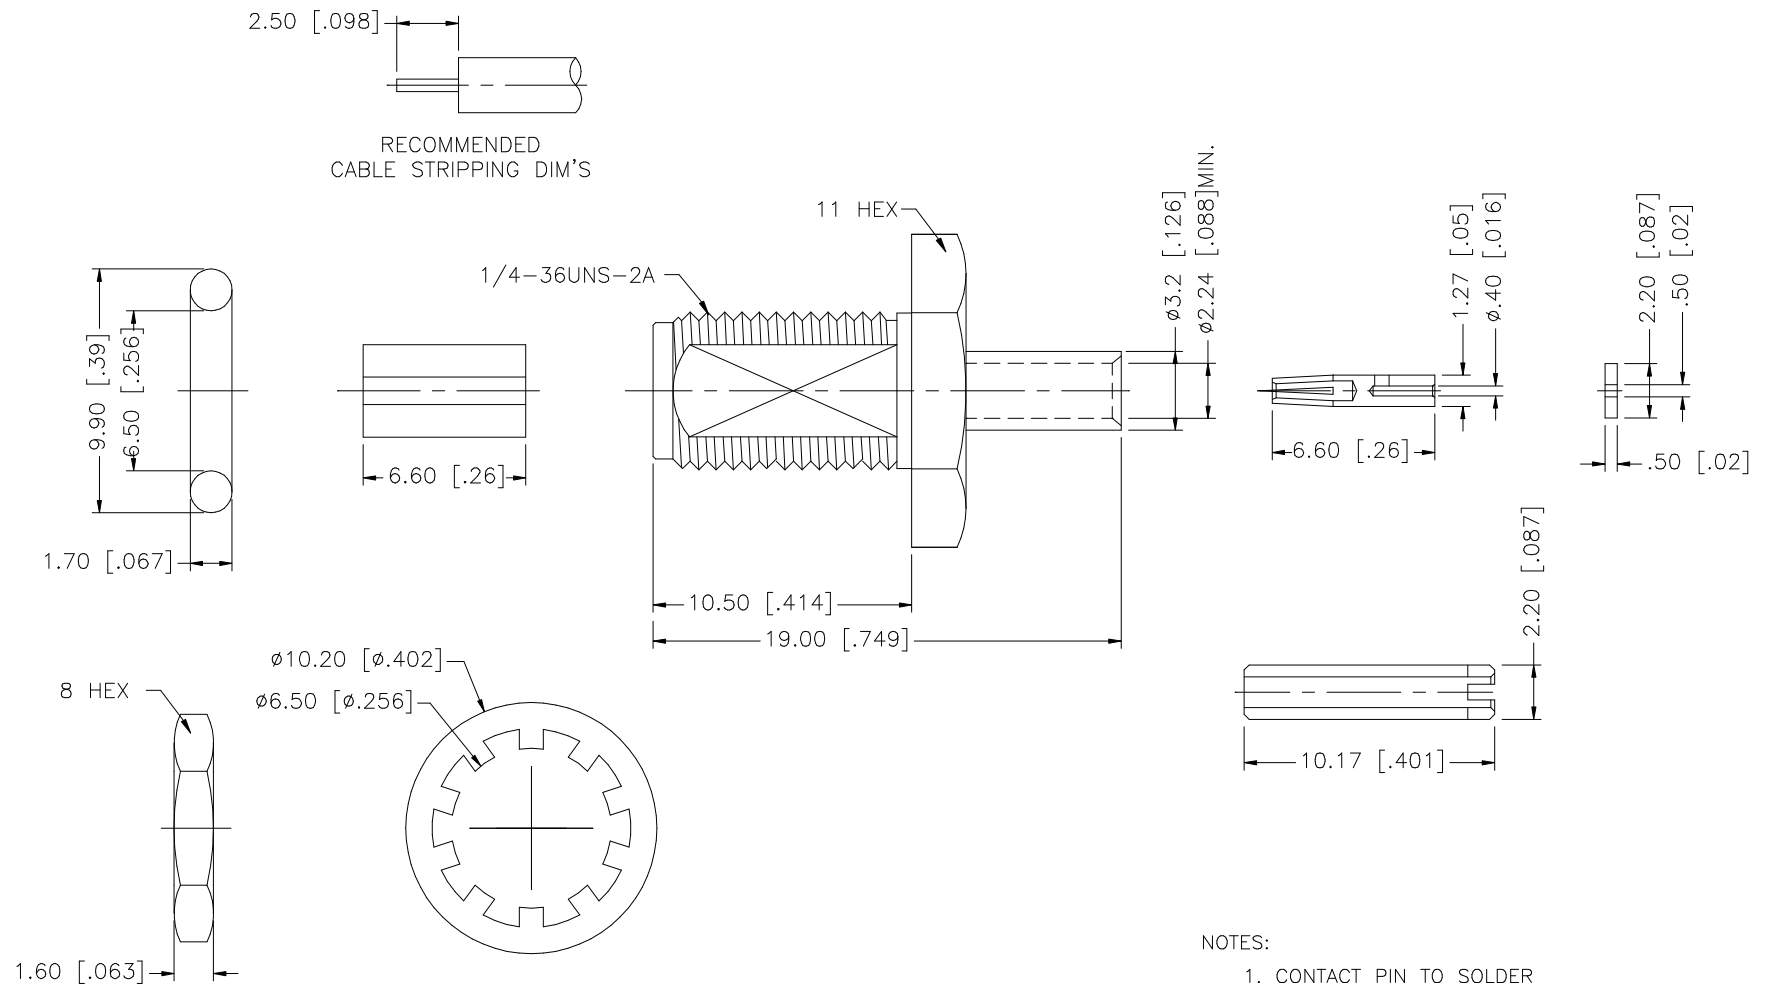

NOTES:

1. CONTACT PIN TO SOLDER
2. MAX. PANEL THICKNESS = 2.4mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex PART DESCRIPTION SMA DIRECT SOLDER BULKHEAD JACK (FOR .047” SEMI RIGID CABLE) PART NO. 132251 DWG. NO.132251.DWG REV. A SIZE A SCALE NA												
8						DRAWN	G.R.S.	11/12/03															
7	SOLDER NUT	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		CHECKED																
6	HEX NUT	BRASS	GOLD	1			ISSUED																
5	LOCK WASHER	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		SHEET	1 OF 1															
4	GASKET	SILICONE	RED	1																			
3	CONTACT PIN	BER. COPPER	GOLD	1																			
2	INSULATOR	TEFLON	NATURAL	1																			
1	BODY	BRASS	GOLD	1																			
<table><tr><th>DESCRIPTION</th><th>MATERIAL</th><th>FINISH</th><th>QTY</th></tr><tr><td></td><td></td><td></td><td></td></tr></table>					DESCRIPTION	MATERIAL	FINISH	QTY					DO NOT SCALE DRAWING		CAD FILE		C:/132/132251.DWG						
DESCRIPTION	MATERIAL	FINISH	QTY																				