



REV.	DATE	DESCRIPTION
NC	08/10/99	INITIAL RELEASE

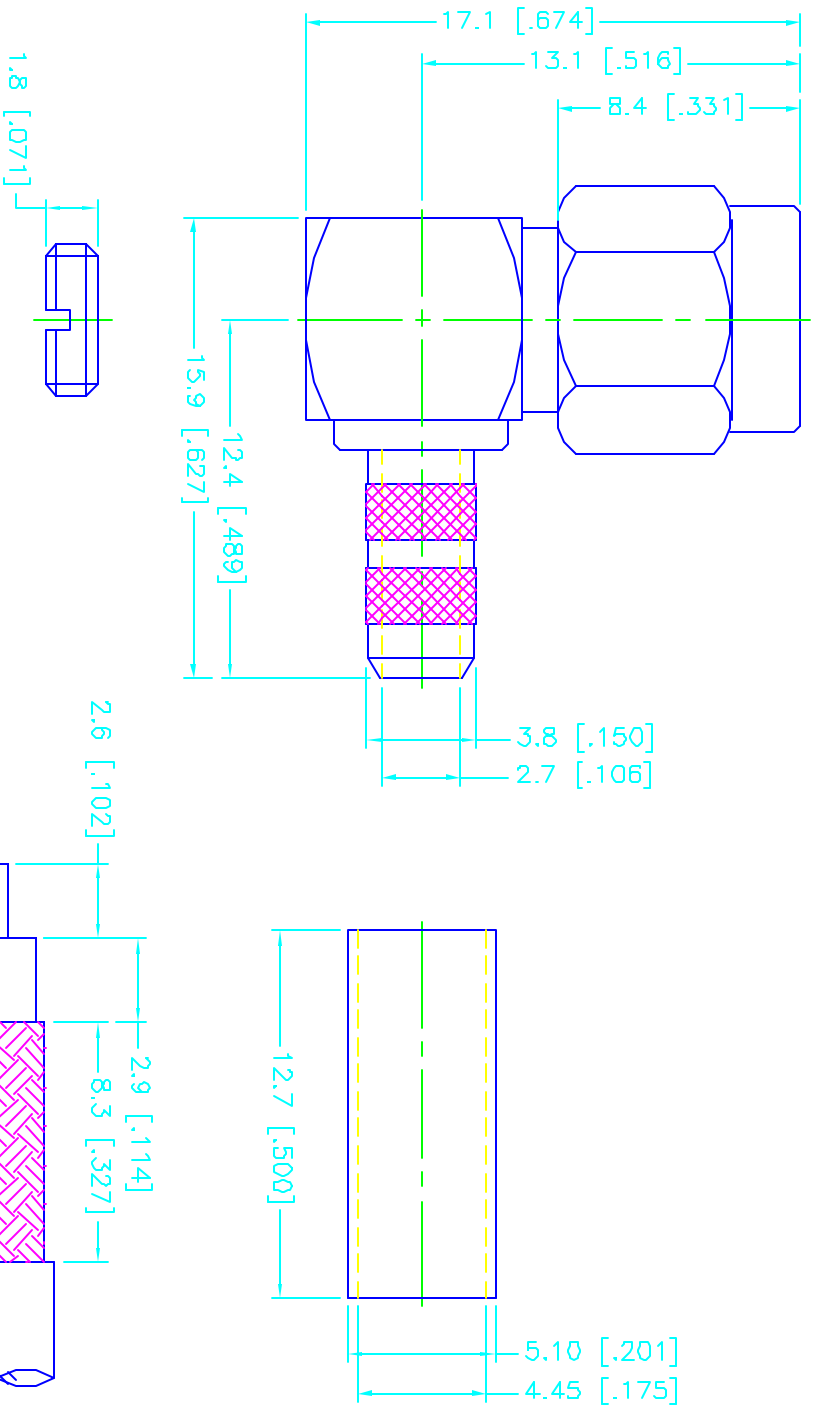

RECOMMENDED
CABLE STRIPPING DIM'S

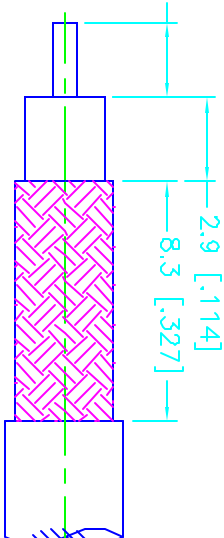

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	APPROVALS	DATE	TITLE SMA R/A CRIMP PLUG (FOR RG-180B/U, 195/U, B8218, B1855, B1865)			
1 BODY	BRASS	GOLD		DRAWN G.R.S.	08/10/99	 Connex Connector Corporation			
2 INSULATOR	TEFLON	NATURAL		CHECKED					
3 CONTACT PIN	BRASS	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED					
4 COVER	BRASS	GOLD							
5 FERRULE	COPPER	GOLD							
6						SIZE	FSQM NO.	DWG. NO.	REV.
7						A	99001	132272.DWG	NC
8			DO NOT SCALE DRAWING			SCALE	NA	PART NO.	132272
						SHEET			1 OF 1