

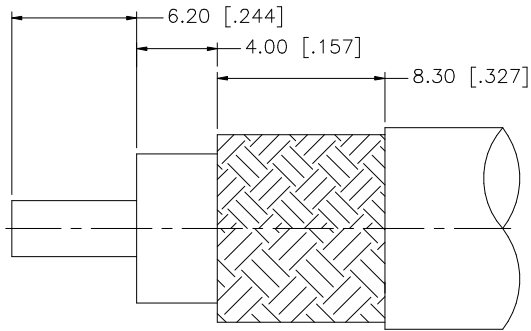
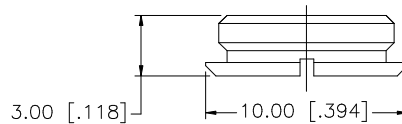


REV.	DATE	DESCRIPTION
NC	02/27/01	INITIAL RELEASE
A	03/12/07	UPDATE DRAWING FORMAT

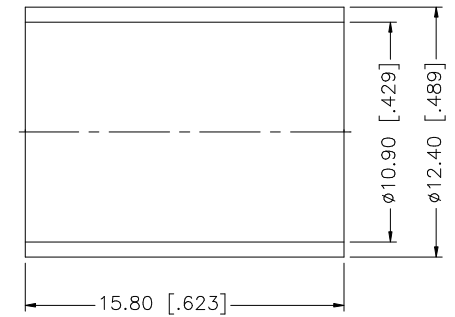

RECOMMENDED
CABLE STRIPPING DIM'S

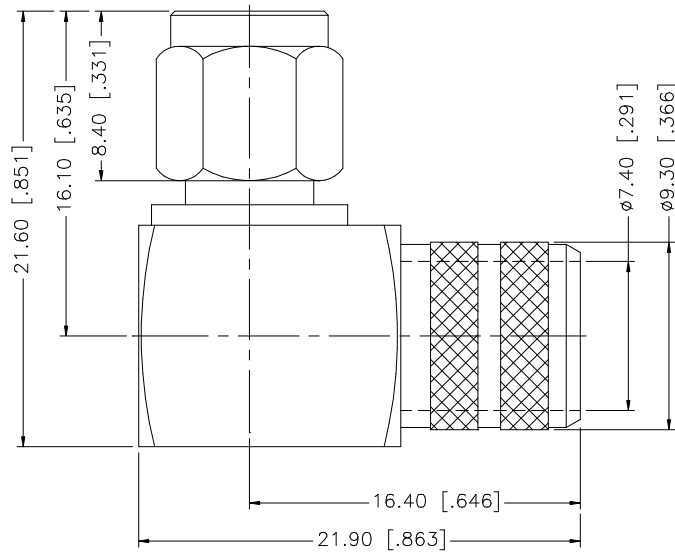

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS		DATE		Amphenol Connex									
8						DRAWN	G.R.S.	03/12/07											
7						CHECKED													
6						ISSUED				PART DESCRIPTION SMA R/A CRIMP PLUG (FOR BELDEN 9913, 9914, TIME U/R–400 CABLE)									
5	FERRULE	COPPER	GOLD	1		SHEET		1 OF 1											
4	COVER	BRASS	GOLD	1						PART NO. 132299									
3	CONTACT PIN	BRASS	GOLD	1	CAD FILE		C:/132/132299.DWG												
2	INSULATOR	TEFLON	NATURAL	1	DO NOT SCALE DRAWING					DWG. NO.		132299.DWG		REV.	A	SIZE	A	SCALE	NA
1	BODY	BRASS	GOLD	1															
	DESCRIPTION	MATERIAL	FINISH	QTY															