


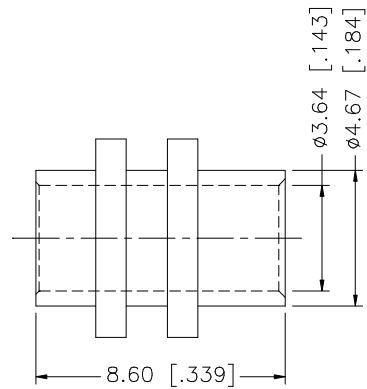


REV.	DATE	DESCRIPTION
A	01/20/04	UPDATE DRAWING FORMAT

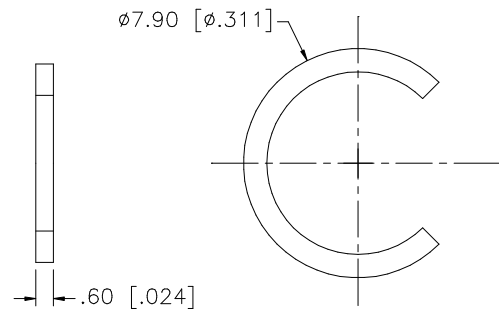

RECOMMENDED CABLE
STRIPPING DIMENSIONS

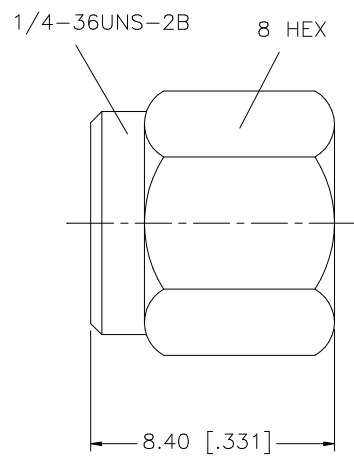

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex									
7						DRAWN	G.R.S.					01/20/04					
6						CHECKED											
5						ISSUED			PART DESCRIPTION								
4	RETAINER RING	BER. COPPER	NATURAL	1					SMA DIRECT SOLDER PLUG (.141 SEMI-RIGID CABLE)								
3	GASKET	SILICONE	RED	1				PART NO.									
2	BODY	BRASS	GOLD	1				132100									
1	HOUSING	BRASS	GOLD	1													
DESCRIPTION					MATERIAL	FINISH	QTY	CAD FILE		DWG. NO.	132100	REV.	A	SIZE	A	SCALE	NA
					DO NOT SCALE DRAWING		C:/132/132100.DWG										