
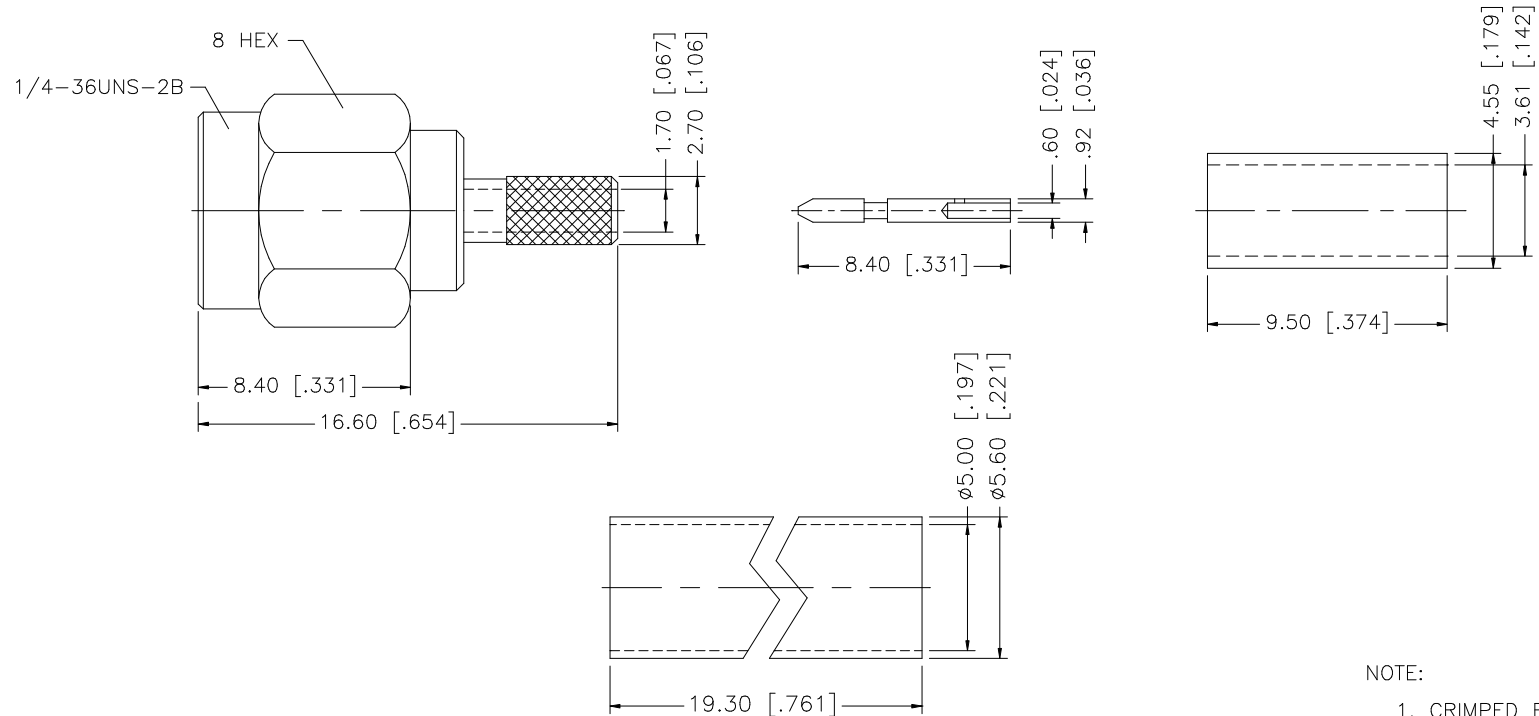


REV.	DATE	DESCRIPTION
D	11/08/99	UPDATE STRIPPING DIM'S
E	01/23/03	REFORMAT DRAWING/ UPDATE FERRULE DIMS

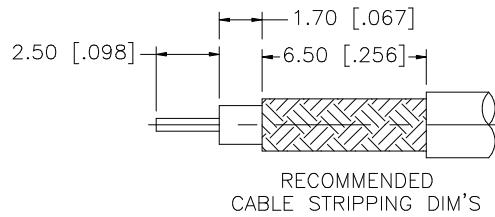

NOTE:
 1. CRIMPED FERRULE
 HEX CRIMP SIZE .151"
 2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex							
8						DRAWN	G.R.S.	01/23/03										
7	HEAT SHRINK TUBE				1	CHECKED												
6	FERRULE	COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	ISSUED				PART DESCRIPTION								
5	CONTACT PIN	BRASS	GOLD	1		SHEET		1 OF 1		SMA CRIMP PLUG (FOR RG-316/U DOUBLE BRAID CABLE)								
4	GASKET	SILICONE	RED	1														
3	RETAINER RING	BER. COPPER	NATURAL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	CAD FILE		C:/132/132178.DWG		PART NO.								
2	INSULATOR	TEFLON	NATURAL	1						132178								
1	SHELL/BODY	BRASS	GOLD	1		DO NOT SCALE DRAWING				DWG. NO.		132178.DWG		REV.	E	SIZE	A	SCALE
DESCRIPTION					MATERIAL	FINISH	QTY											