

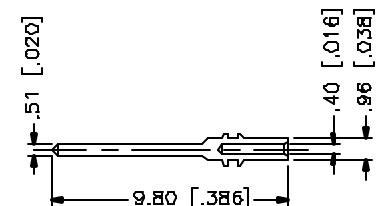
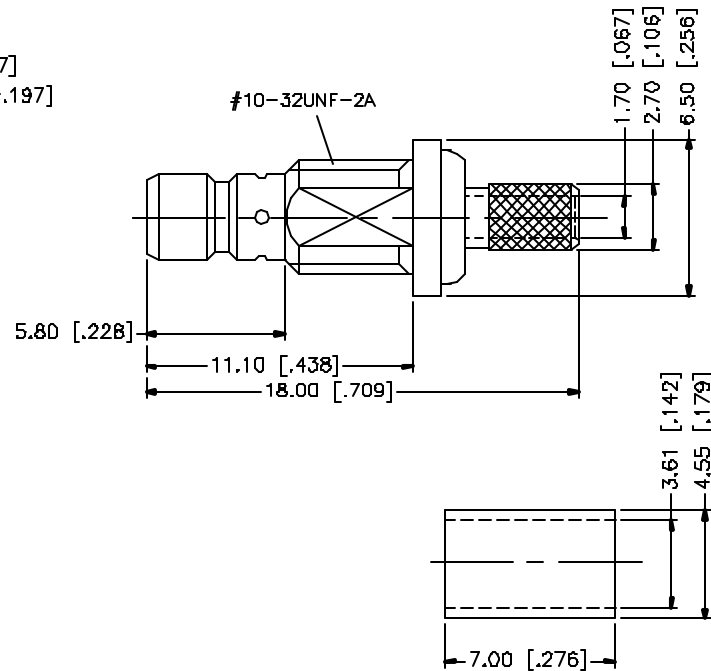

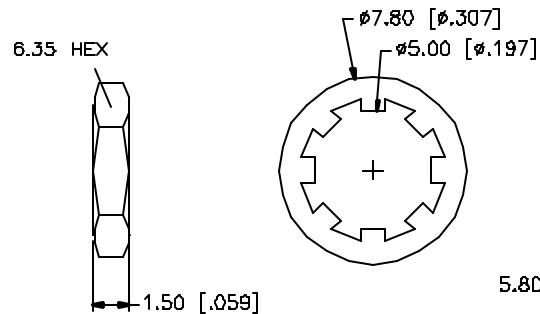


REV.	DATE	DESCRIPTION
NC	08/27/04	INITIAL RELEASE

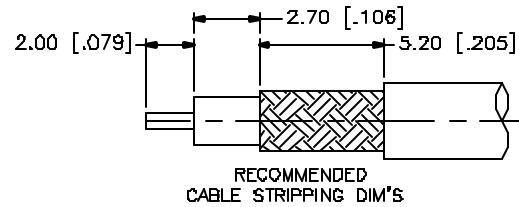

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex									
8						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm		DRAWN G.R.S.		08/27/04											
7	HEAT SHRINK TUBE				1			CHECKED				PART DESCRIPTION									
6	HEX NUT	BRASS	GOLD	1				ISSUED				SMB MINI 75ohm BULKHEAD CRIMP JACK (FOR RG-179 BOUBLE BRAID CABLE)									
5	LOCK WASHER	BRASS	GOLD	1				SHEET		1 OF 1		PART NO.									
4	FERRULE	COPPER	GOLD	1								142192-75									
3	CONTACT PIN	BRASS	GOLD	1				CAD FILE		C:/142/142192-75.DWG		DWG NO.		142192-75.DWG	REV.	NC	SIZE	A	SCALE	NA	
2	INSULATOR	TEFLON	NATURAL	1																	
1	BODY	BRASS	GOLD	1																	
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING																