
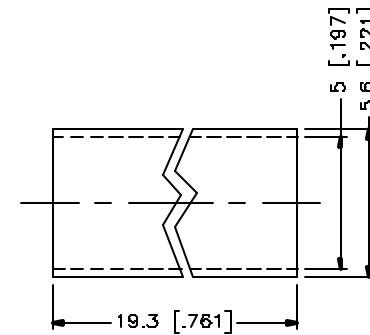

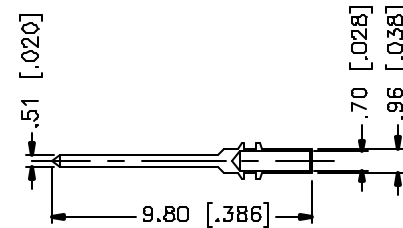
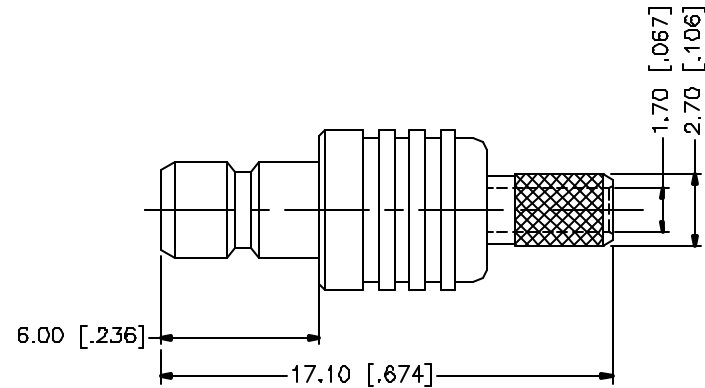


REV.	DATE	DESCRIPTION
NC	08/27/04	INITIAL RELEASE

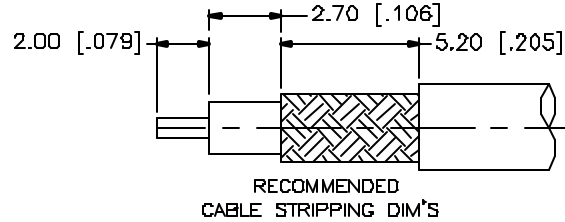

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex										
8						DRAWN	G.R.S.						08/27/04					
7						CHECKED			PART DESCRIPTION									
6						ISSUED			SMB MINI 75ohm CRIMP JACK (FOR RG-179 BOUBLE BRAID CABLE)									
5	HEAT SHRINK TUBE			1		SHEET	1 OF 1		PART NO.									
4	FERRULE	COPPER	GOLD	1					142190-75									
3	CONTACT PIN	BRASS	GOLD	1					CAD FILE	C:/142/142190-75.DWG	DWG. NO.	142190-75.DWG	REV.	NC	SIZE	A	SCALE	NA
2	INSULATOR	TEFLON	NATURAL	1														
1	BODY	BRASS	GOLD	1														
	DESCRIPTION	MATERIAL	FINISH	QTY														