

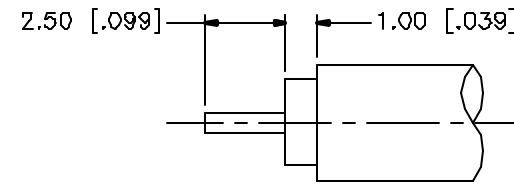


REV.	DATE	DESCRIPTION
NC	01/09/05	INITIAL RELEASE

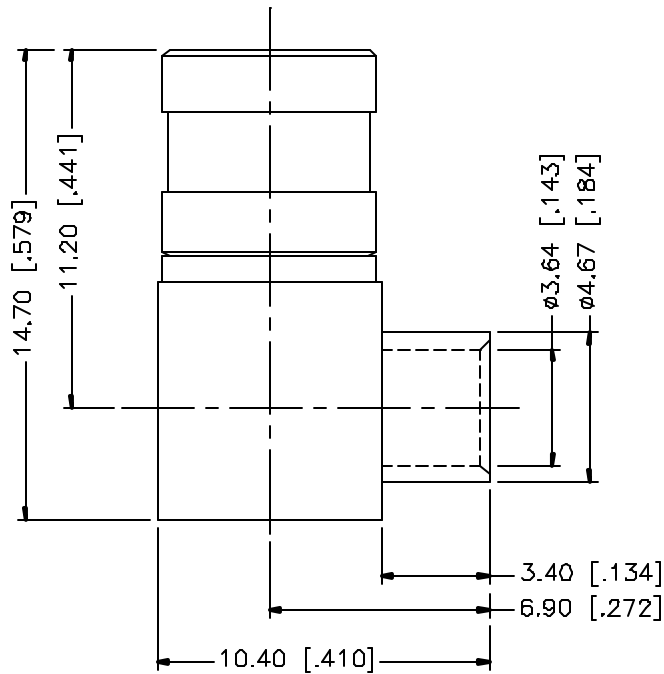

RECOMMENDED CABLE
STRIPPING DIMENSIONS

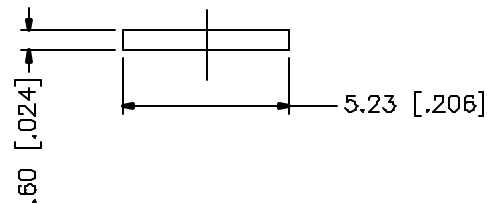

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.1 - 3mm ± 0.20mm 3 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
8						DRAWN	G.R.S.						01/09/05
7						CHECKED			PART DESCRIPTION SMB R/A DIRECT SOLDER PLUG (FOR .141" SEMI-RIGID CABLE)				
6						ISSUED							
5						SHEET	1 OF 1		PART NO. 142329				
4	COVER	BRASS	GOLD	1									
3	CONTACT PIN	BER. COPPER	GOLD	1				DWG. NO. 142329.DWG					
2	INSULATOR	TEFLON	NATURAL	1									REV. NC
1	BODY	BRASS	GOLD	1				SIZE A		SCALE NA			
	DESCRIPTION	MATERIAL	FINISH	QTY	C:/142/142329.DWG								