

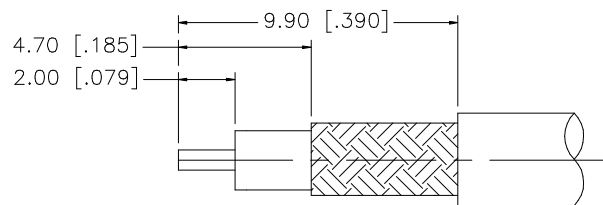
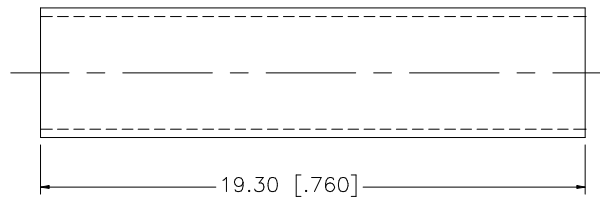
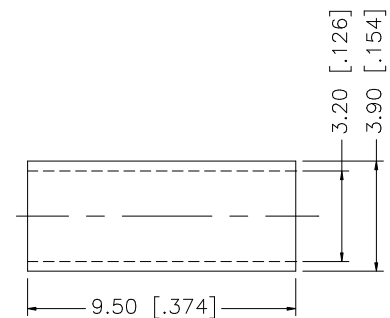


REV.	DATE	DESCRIPTION
A	04/31/03	UPDATE DRAWING FORMAT
B	05/02/07	REVISE BARREL AND FERRULE DIMENSIONS



RECOMMENDED
CABLE STRIPPING DIM'S

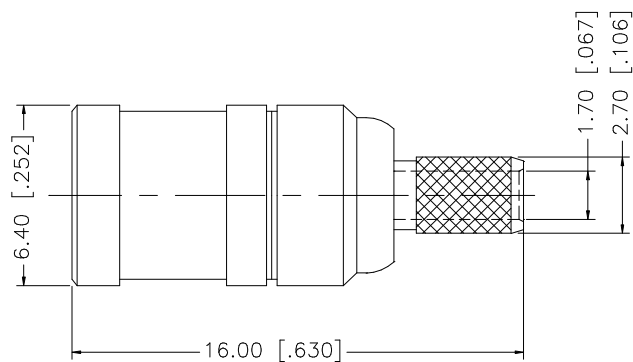

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.								05/02/07
7						CHECKED			PART DESCRIPTION SMB CRIMP PLUG (FOR RG–174/U, 188A/U, 316/U)						
6						ISSUED									
5	HEAT SHRINK TUBE		BLACK	1		SHEET	1 OF 1		PART NO. 142178						
4	FERRULE	COPPER	NICKEL	1											
3	CONTACT PIN	BER. COPPER	GOLD	1				DWG. NO. 142178.DWG							
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	NICKEL	1				REV. B	SIZE A	SCALE NA					
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/142/142178.DWG									