
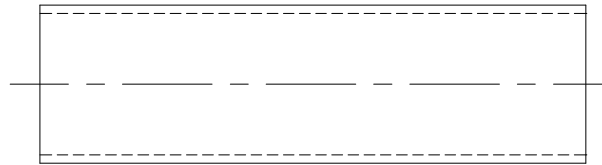
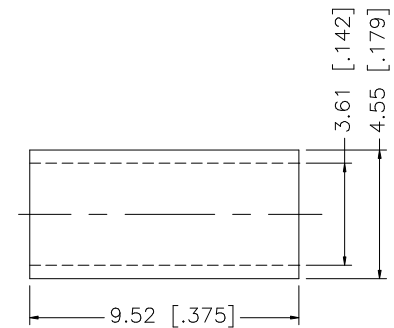



2.00 [.079]

2.70 [.106]

5.20 [.205]

RECOMMENDED
CABLE STRIPPING DIM'S

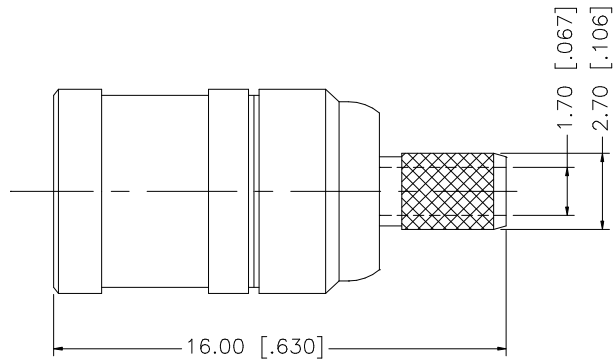

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex			
8					DRAWN	G.R.S.	01/30/04					
7					CHECKED			PART DESCRIPTION SMB CRIMP PLUG (FOR RG–316U/D CABLE)				
6					ISSUED							
5	HEAT SHRINK TUBE		BLACK		1	SHEET	1 OF 1		PART NO. 142187			
4	FERRULE	COPPER	GOLD		1							
3	CONTACT PIN	BER. COPPER	GOLD		1			DWG. NO. 142187.DWG REV. A SIZE A SCALE NA				
2	INSULATOR	TEFLON	NATURAL		1							
1	BODY	BRASS	GOLD	1	CAD FILE C:/142/142187.DWG							
DESCRIPTION		MATERIAL	FINISH	QTY								