
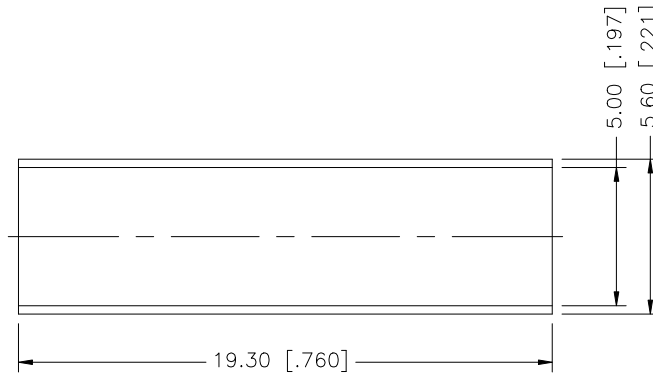

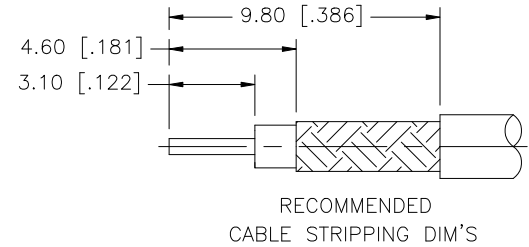
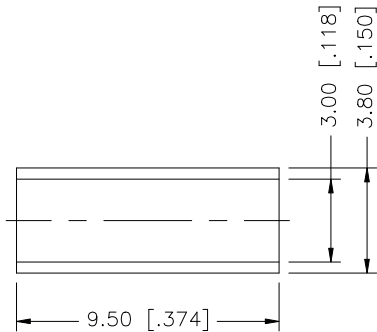


REV.	DATE	DESCRIPTION
NC	10/04/07	INITIAL RELEASE

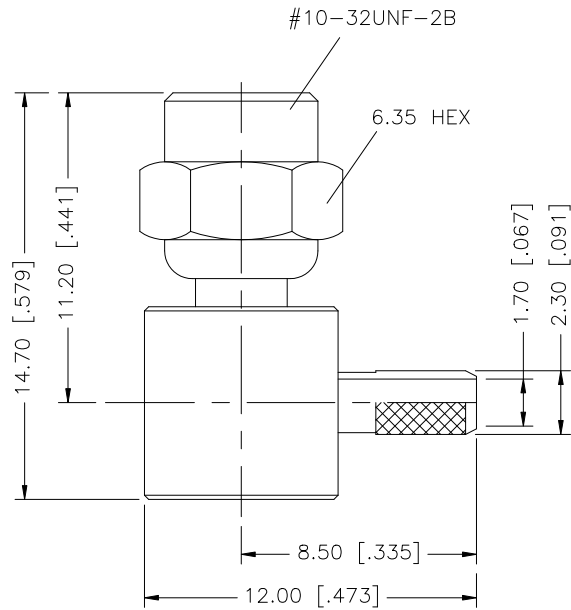

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	10/04/07						
7						CHECKED								
6	HEAT SHRINK TUBE			1						PART DESCRIPTION SMC R/A CRIMP PLUG (RG-174/U, 188A/U, 316/U)				
5	FERRULE	COPPER	GOLD	1										
4	COVER	BRASS	GOLD	1						PART NO. 152107				
3	CONTACT PIN	BER. COPPER	GOLD	1		SHEET 1 OF 1								
2	INSULATOR	TEFLON	NATURAL	1						DWG. NO. 152107.DWG				
1	BODY	BRASS	GOLD	1										
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE C:/152/152107.DWG		REV.	NC	SIZE	A	SCALE