


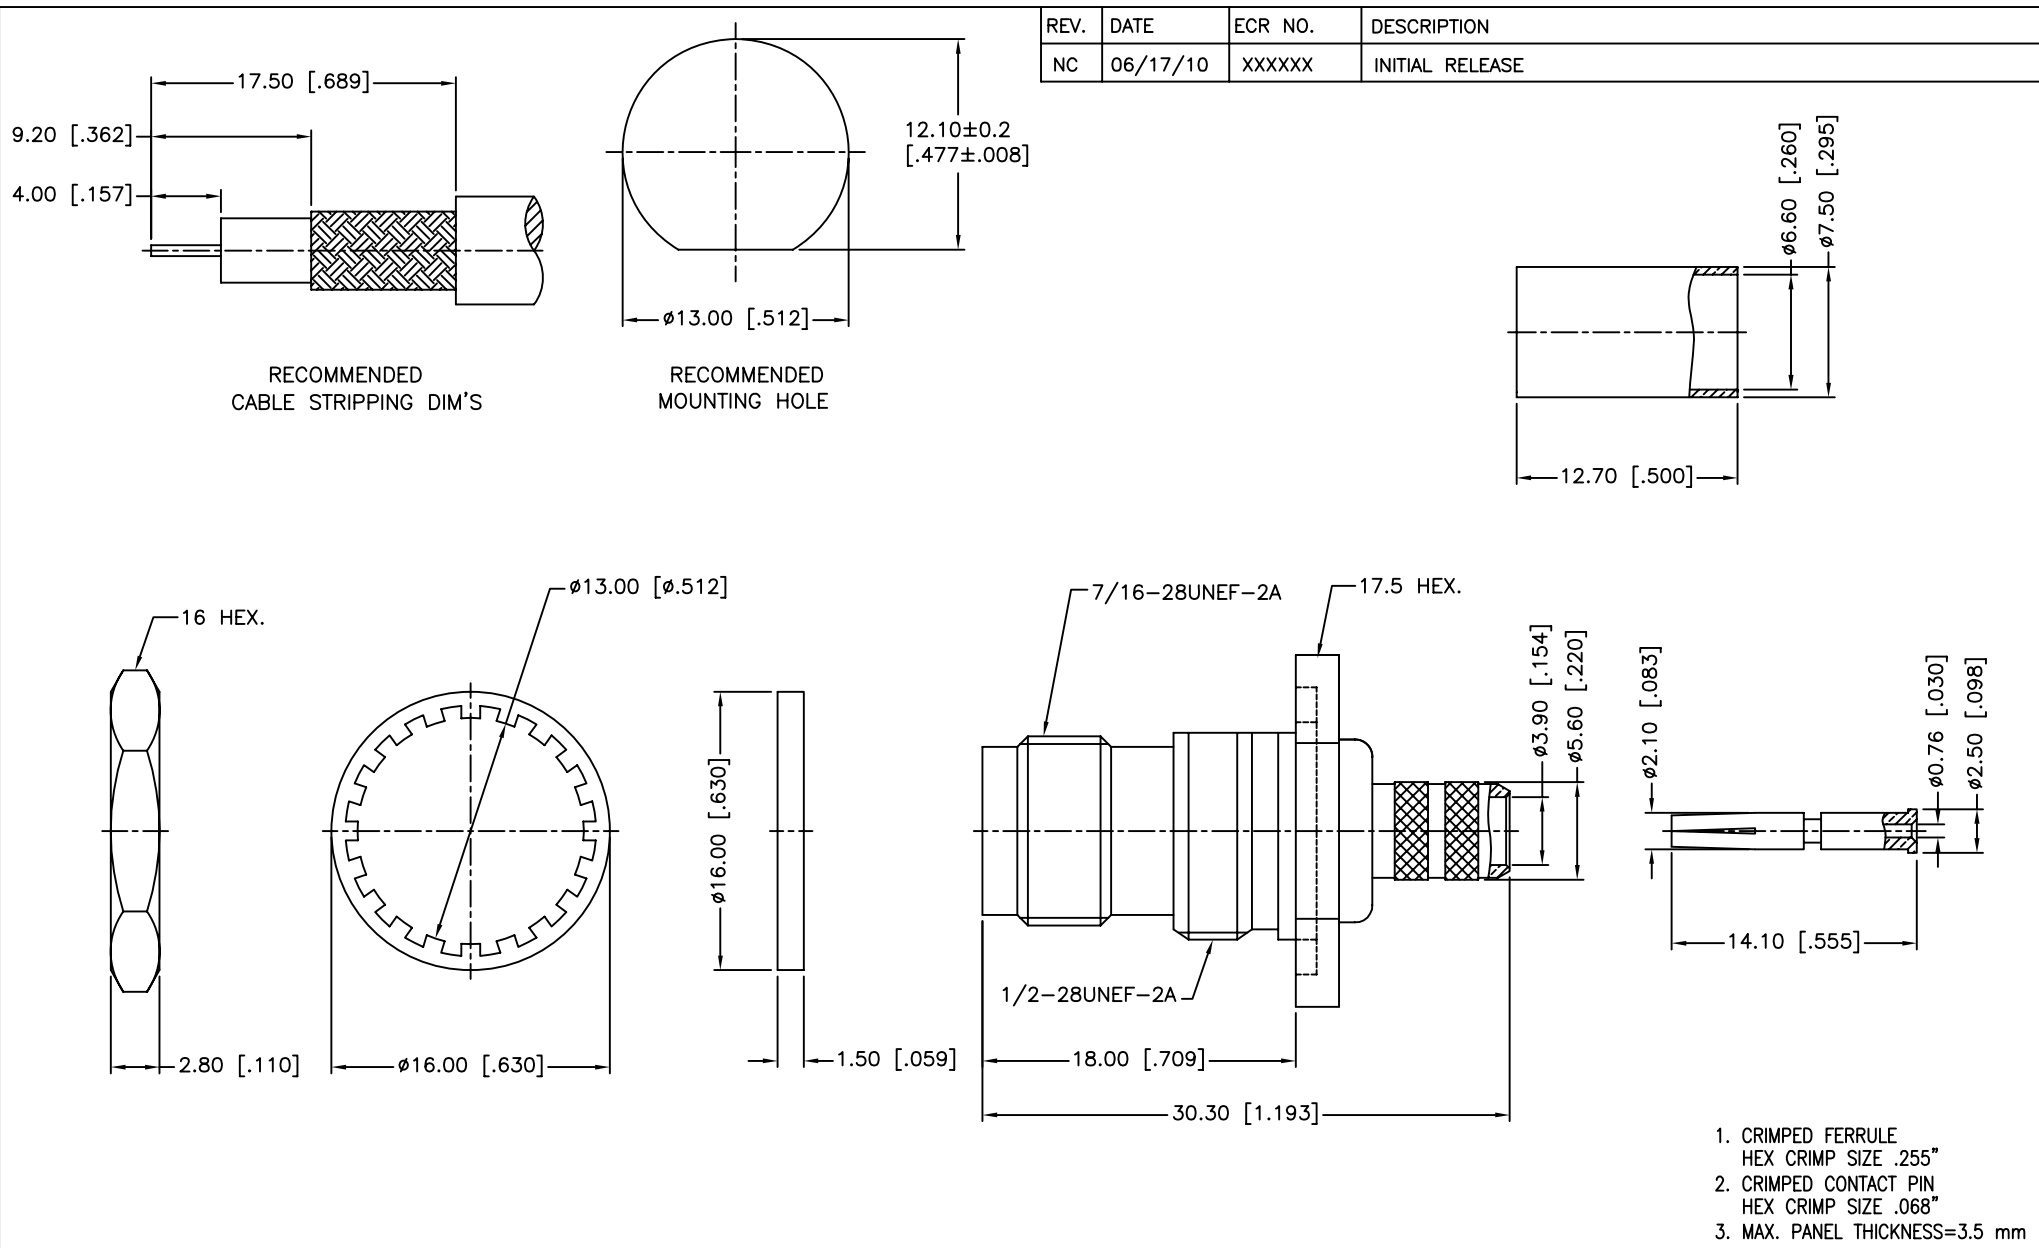

9	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex					
8	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1		DRAWN	M.ZHANG					06/17/10	
7	HUT HEX	BRASS	NICKEL	1		CHECKED			PART DESCRIPTION TNC BULKHEAD CRIMP JACK – 75 OHM (FOR RG-59/U CABLE)				
6	LOCK WASHER	BRASS	NICKEL	1		ISSUED							
5	GASKET	RUBBER	RED	1		SHEET	1 OF 1		PART NO. 122163				
4	BARREL	BRASS	NICKEL	1	CAD FILE			DWG. NO. 122163.DWG					
3	INSULATOR	PTFE	NATURAL	1	C:/CONNEX/122163.DWG						REV. NC	SIZE A	SCALE NA
2	BODY	BRASS	NICKEL	1	DO NOT SCALE DRAWING								
1	HOUSING	BRASS	NICKEL	1									
	DESCRIPTION	MATERIAL	FINISH	QTY									