
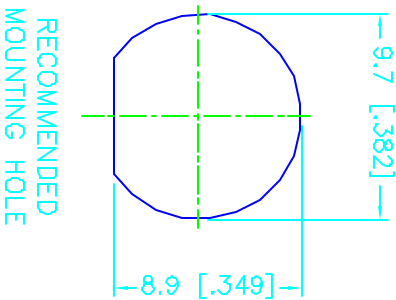


REV.	DATE	DESCRIPTION
NC	04/01/98	INITIAL RELEASE

DIMENSION NOTES:

L1=3.2mm MAX.
L= 26.7mm

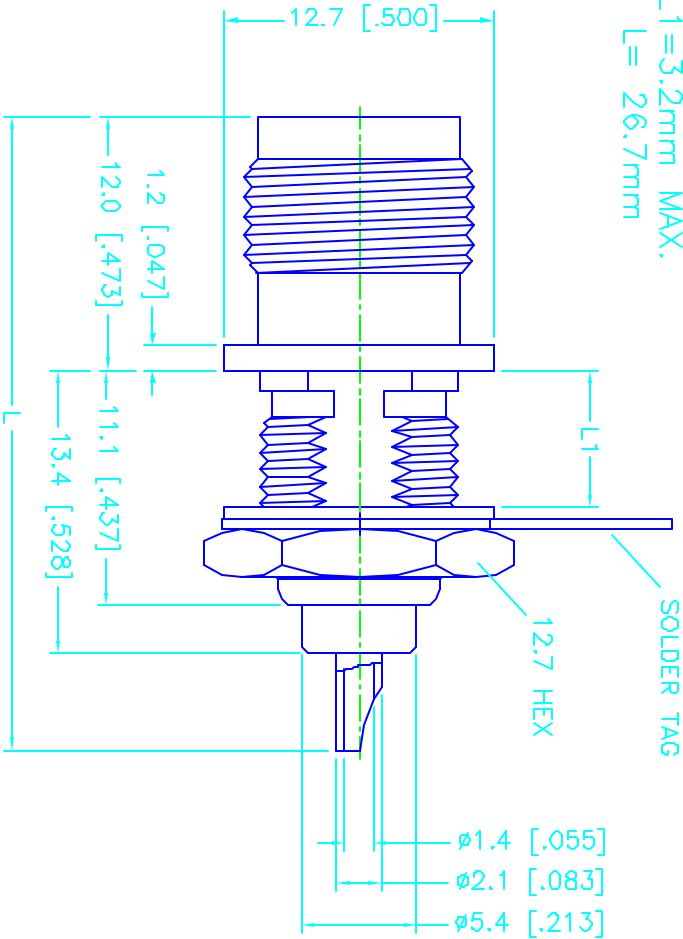

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY		APPROVALS		DATE	TITLE							
1	BODY	BRASS	NICKEL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN	G.R.S.	04/01/98	 Connector Corporation BULKHEAD RECEPTACLE JACK (75 ohm)							
2	INSULATOR	DEL.RIN	NATURAL		CHECKED										
3	CONTACT PIN	PHOS. BRONZE	GOLD		ISSUED										
4	FERRULE	COPPER	NICKEL						TITLE						
5	HEX NUT	BRASS	NICKEL						SIZE	FROM NO.	DWG. NO.	REV.			
6									A	99001	122333	NC			
7															
8						DO NOT SCALE DRAWING			SCALE	NA	PART NO.	122333	SHEET	1	OF



BULKHEAD RECEPTACLE JACK

(75 ohm)