

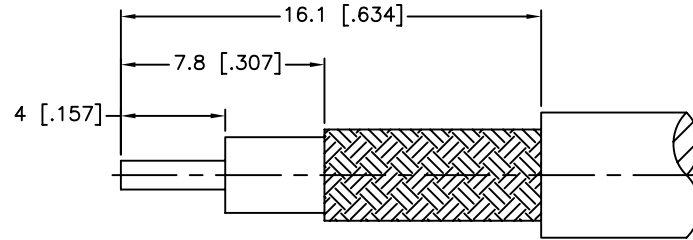
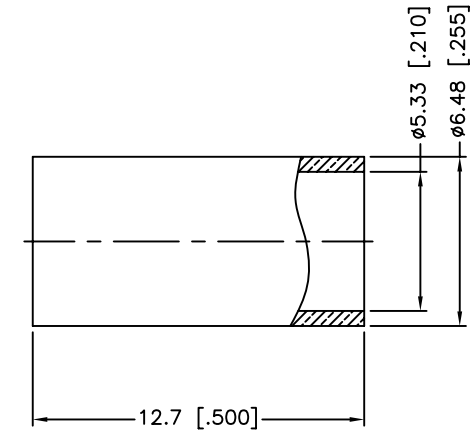


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/04/98	XXXXXX	INITIAL RELEASE
A	03/27/05	100025	UPDATE DRAWING FORMAT
B	01/22/11	2138	CHANGE THE FERRULE O.D. AND I.D.

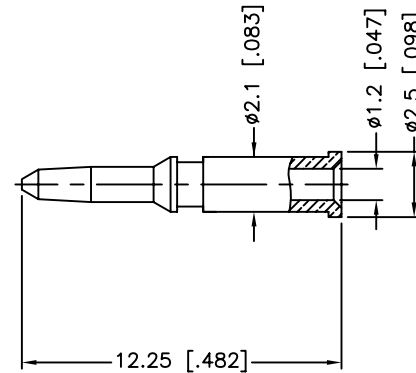

RECOMMENDED
CABLE STRIPPING DIM'S

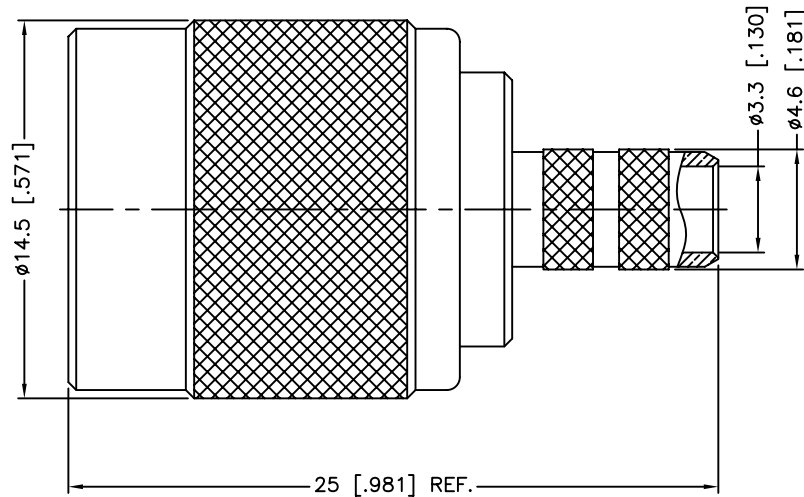

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

9	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex					
8	CONTACT PIN	BRASS	GOLD	1		DRAWN	M.ZHANG						01/22/11
7	WASHER	BRASS	NICKEL	1		CHECKED							
6	RING	DELTRIN	NATURAL	1		ISSUED			PART DESCRIPTION TNC CRIMP PLUG – LMR200				
5	RETAINER RING	BRASS	NICKEL	1		SHEET	1 OF 1						
4	GASKET	RUBBER	RED	1	DO NOT SCALE DRAWING	CAD FILE		PART NO. 122410					
3	INSULATOR	DELTRIN	NATURAL	1		C:/CONNEX/122410.DWG							
2	BODY	BRASS	NICKEL	1					DWG. NO. 122410.DWG REV. B SIZE A SCALE NA				
1	SHELL	BRASS	NICKEL	1									
	DESCRIPTION	MATERIAL	FINISH	QTY									