


REV.	DATE	ECR NO.	DESCRIPTION
NC	02/17/98	—	INITIAL RELEASE
A	05/31/06	—	UPDATE DRAWING FORMAT
B	03/16/09	—	REVISE INTERNAL BODY CONFIGURATION

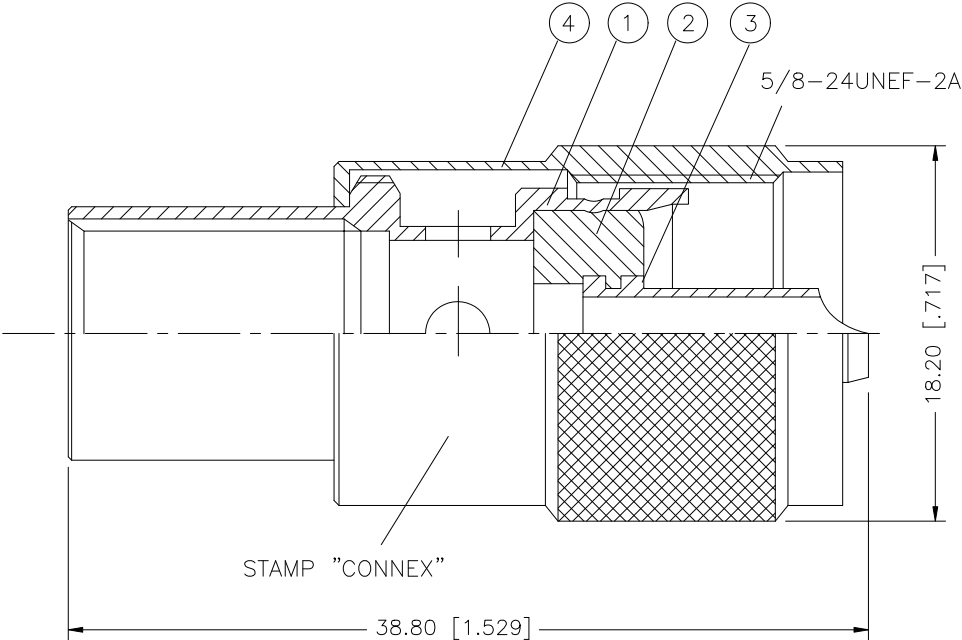

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	GRS	03/16/09						
7						CHECKED								
6						ISSUED				PART DESCRIPTION UHF SOLDER PLUG (FOR RG–8/U, 11/U CABLE)				
5						SHEET	1 OF 1							
4	COUPLING NUT	BRASS	NICKEL	1						PART NO. 182106				
3	CONTACT PIN	BRASS	SILVER	1										
2	INSULATOR	PHENOLIC	YELLOW	1						DWG. NO. 182106.DWG REV. NC SIZE B SCALE NA				
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE C:/182/182106.DWG									