



- NOTES:
- 1. MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES)
BODY - BRASS, NICKEL PLATING
CONTACT - BRASS, SILVER PLATING
INSULATOR - PS, NATURAL
 - 2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 4 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
 - 3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -30° C TO +70° C
 - 4. ASTERISK (*) INDICATES CABLE ENTRY DIMENSIONS.
 - 5. CUSTOMER NOTE: SOLDER CONTACT TO CABLE.

THIRD ANGLE PROJ.


REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
P	ADD COD	21-Nov-12	49346	SL

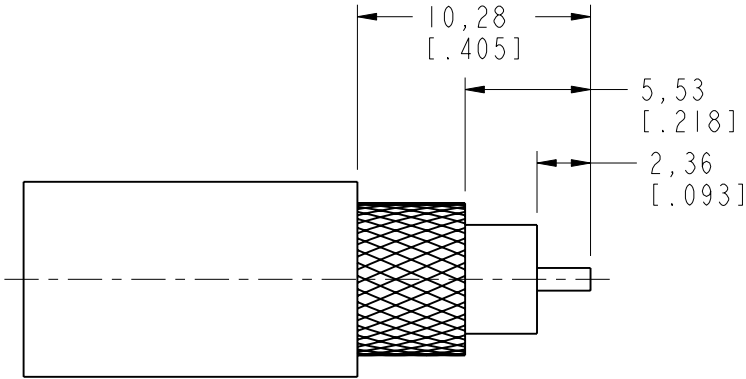

SCALE 1.000

RECOMMENDED
CABLE STRIPPING DIM'S

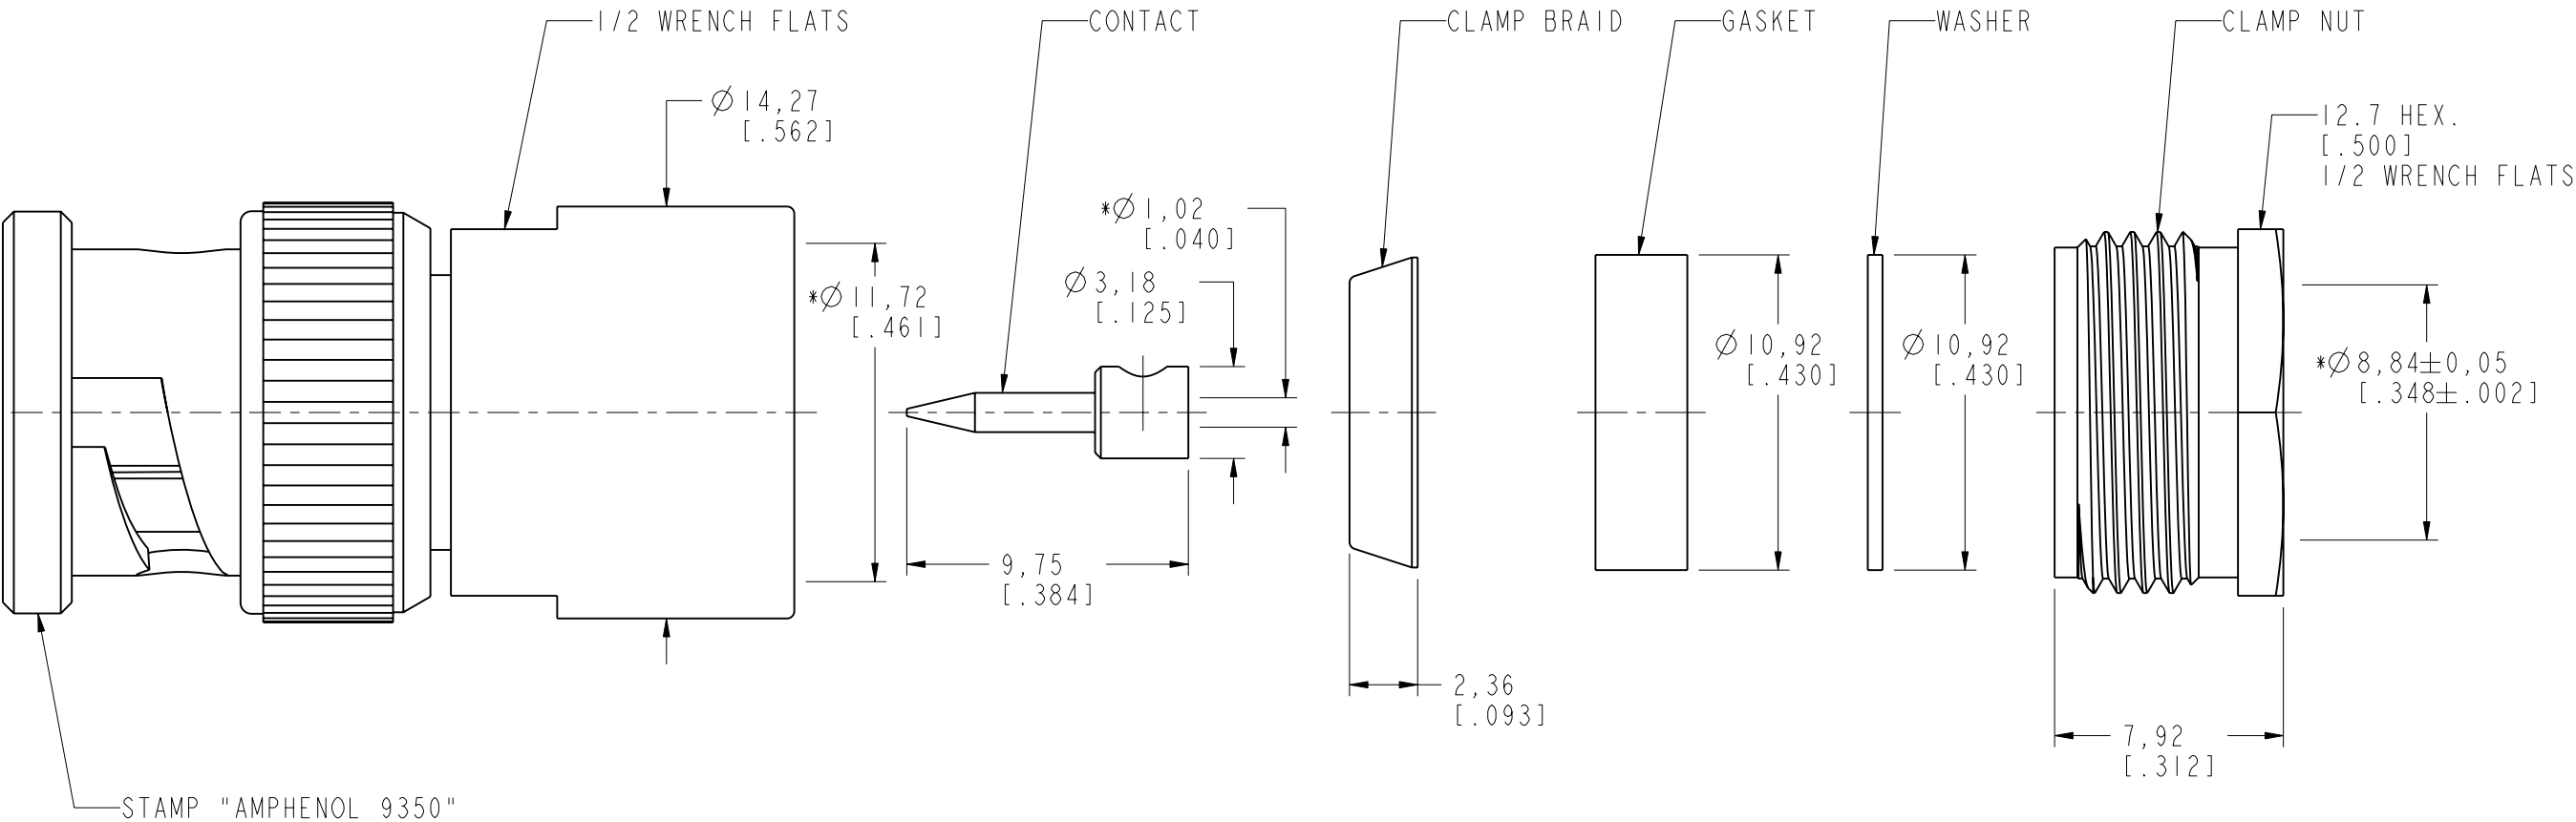

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implicatioin or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwsie, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL -	DRAWN S.LI	DATE 21-Nov-12	TITLE BNC PLUG ASSEMBLY FOR RG 6/U CABLE		Amphenol RF www.amphenolrf.com	
	REFERENCE	ENGINEER S.LI	DATE 21-Nov-12				
	CONFIGURATION LEVEL: ☐ ☐ ☐	APPROVED S.HSIEH	DATE 30-Nov-12	SCALE: 4.0:1.0	SHEET 2 OF 2	DRAWING NO. 9350	
	FINISH	CAD FILE		DWG SIZE B	REV P	ITEM NO. 9350 PART NO. 9350	