NOTES:

1. MATERIALS AND FINISHES

BODY — BRASS, NICKEL PLATING CONTACT — BRASS, GOLD PLATING INSULATOR — DELRIN, NATURAL

ELECTRICAL:

A. IMPEDANCE: 50 OHM


C. FREQUENCY RANGE: DC TO 4 GHz


C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.

MECHANICAL:

A. DURABILITY: 500 CYCLES MIN.

B. TEMPERATURE RANGE: - 40°C to +85°C



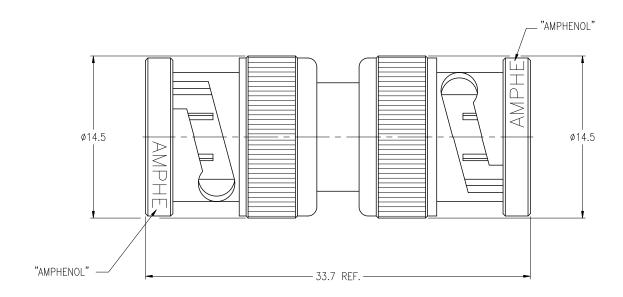

THIRD ANGLE PROJ.

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ±0.05mm ±0.1mm ±0.2mm ±0.3mm ±1		drawn T.DENG	DATE 11-Jul-12	BNC MALE TO BNC		BNC	Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China
are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to	REFERENCE	engineer T.AUBIN	DATE 03-Aug-00	MALE ADAPTOR			www.amphenoIrf.com
		APPROVED	DATE				DRAWING NO.31-218-ND3G-50
		S.HSIEH	11-Jul-12	SCALE: 3/1			ITEM NO. 31-218-ND3G-50
		F:\DWG\APL\CNPD\RFX\31\218\ND3G-FSZ		DWG SI	IZE	REV F	PART NO. 31-218-RFX