

NOTES:

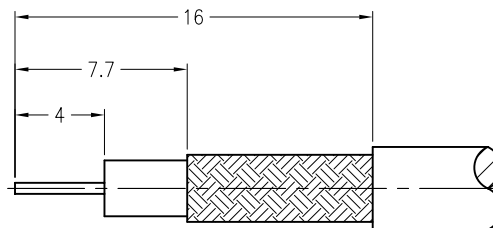
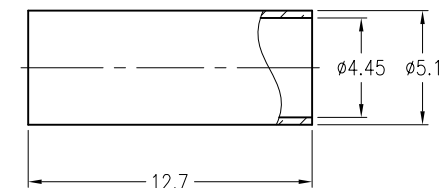
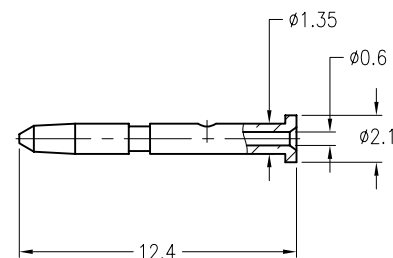
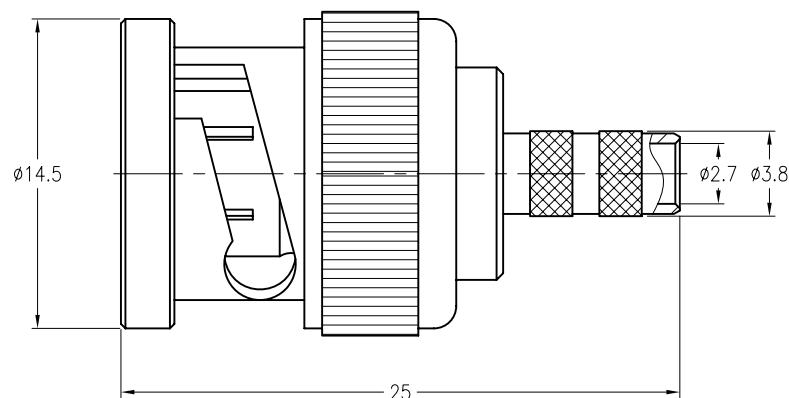
- MATERIALS AND FINISHES
BODY - BRASS, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - PTFE, NATURAL
- ELECTRICAL:
A. IMPEDANCE: 75 OHM
C. FREQUENCY RANGE: DC 0-2 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C to +165°C
- CRIMPED FERRULE
HEX CRIMP SIZE .178"
- CRIMPED CONTACT PIN
SQ. CRIMP SIZE .043"

THIRD ANGLE PROJ.



REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	13-Apr-10	43312	CPM
B	SYNC WITH GLOBAL FORMAT	18-Apr-11	48527	SH

RECOMMENDED
CABLE STRIPPING DIM'S

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

DRAWN
T.DENGDATE
18-Apr-11ENGINEER
S.LIDATE
18-Apr-11

REFERENCE

EAR 967497-0
GEN# ASSYM3_BNC75APPROVED
S.HSIEHDATE
18-Apr-11

CAD FILE

F:\DWG\B\1121A9\8218-75\NT3G-BSZ

FINISH

TITLE

BNC CRIMP PLUG
(FOR BELDEN 8218 CABLE)

SCALE: 3/1

SHEET 2 OF 2

DWG SIZE

B

REV

B

Amphenol RF

Danbury CT USA, Tainan Taiwan, Shenzhen China
www.amphenolrf.com

DRAWING NO. B1121A9-NT3G-8218-75

ITEM NO. 011121AAF88NA7F

PART NO. 31-70236