

NOTES:
1. MATERIAL AND FINISH:
BODY - BRASS, GOLD PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - PTFE, NATURAL

2. ELECTRICAL:
A. IMPEDANCE:50 OHM
B. FREQUENCY RANGE: 0-6 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE:500 VRMS. MIN.

3. MECHANICAL:
A. DURABILITY:500 CYCLES MIN.
B. TEMPERATURE RANGE:-65°C TO +165°C


4. CRIMPED FERRULE
HEX CRIMP SIZE .128"

5. CONTACT PIN TO SOLDER



THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	11/07/96	41601	BCG
B	CONTACT PIN WAS CHANGED	04/27/00	43271	CPM
C	CABLE STRIPPING 9.27 WAS 8.63; 8.25 WAS 7.62	02/21/01	43666	CPM
D	TRANSFERED TO ARFA	07-24-09	---	ANDY
E	BODY WAS CHANGED	11-Jan-10	---	ANDY
F	BODY WAS CHANGED	31-Mar-11	48431	SH

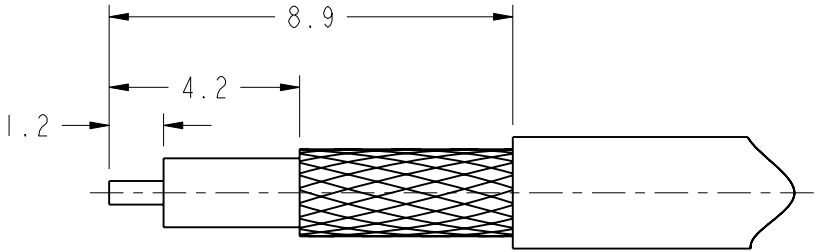

RECOMMENDED
CABLE STRIPPING DIM'S

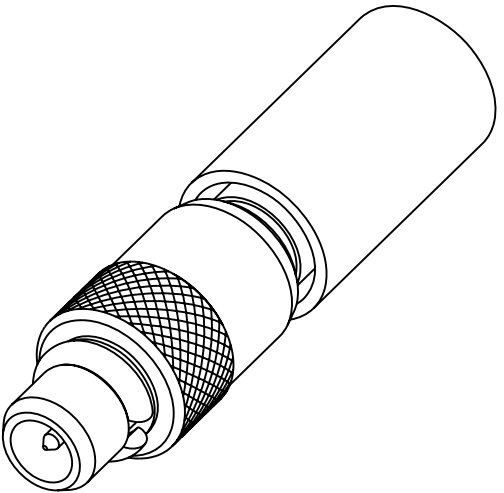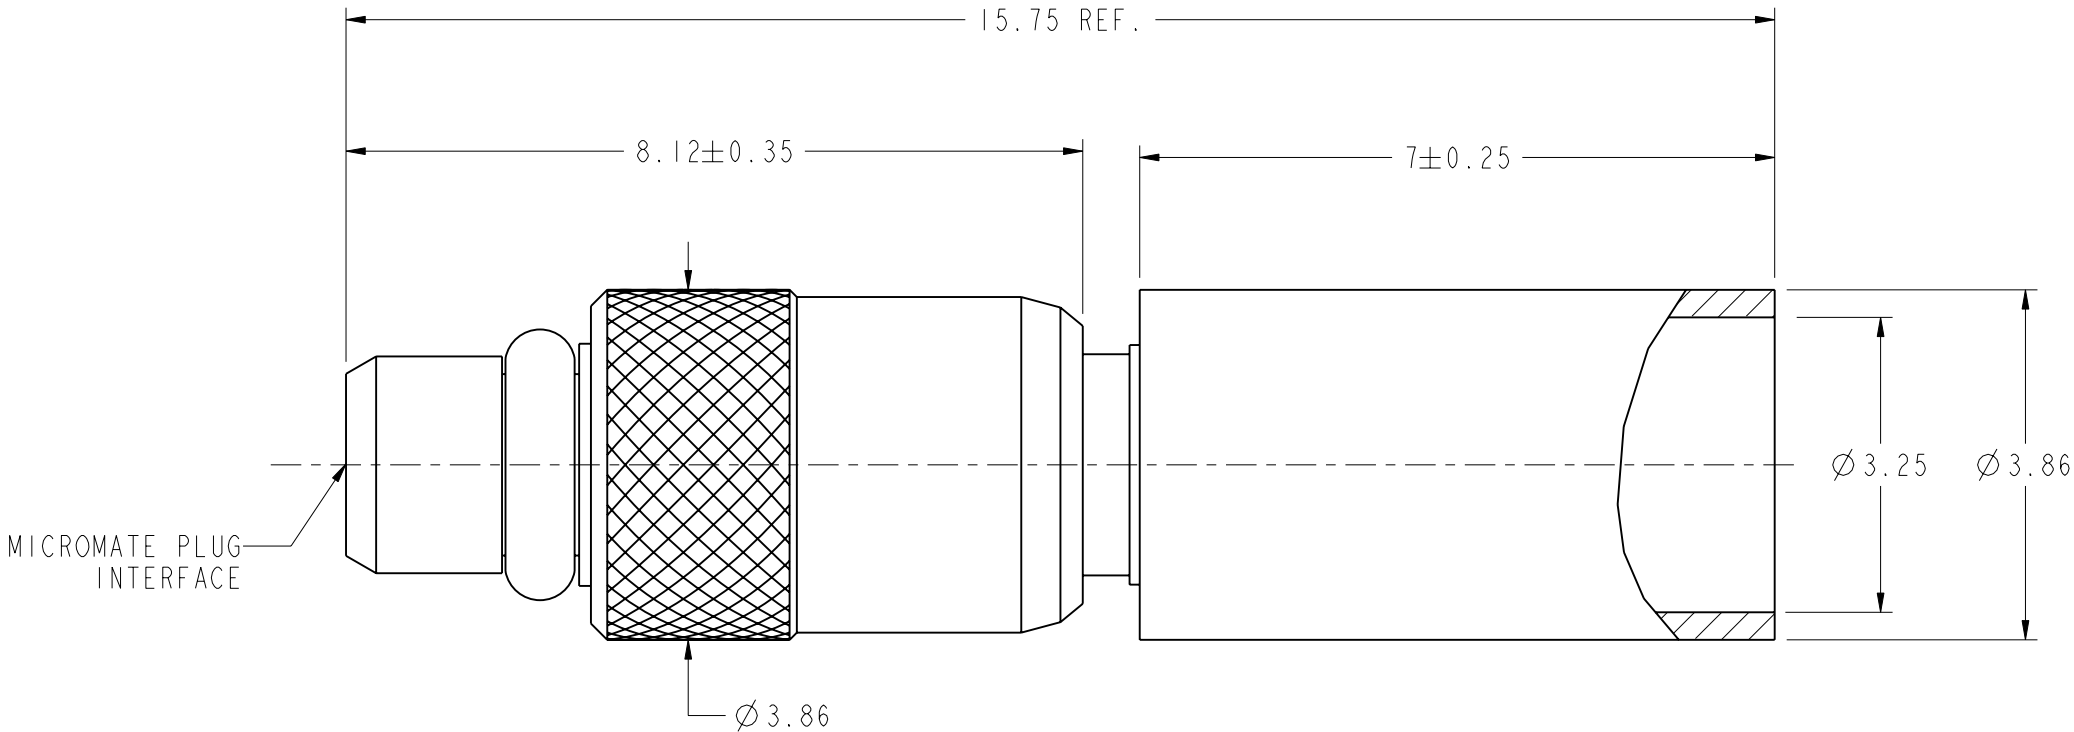

SCALE 6.000

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ± 0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ± 0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	DRAWN T. DENG	DATE 29-Mar-11	TITLE MICROMATE PLUG CRIMP TYPE FOR RG-316 CABLE		Amphenol RF	
	ENGINEER B. GLEISSNER	DATE 03-Jun-09			www.amphenolrf.com	
	REFERENCE EAR 964688-0 GEN# ASSYM3_MMCX	DATE 31-Mar-11			DRAWING NO. 908-41300	
	CONFIGURATION LEVEL: FINISH	I:\MMCX\908-41300	DWG SIZE B	REV F	ITEM NO. 908-41300	
					PART NO. 908-41300	