



NOTES:



1. MATERIALS AND FINISHES:
BODIES - BRASS, NICKEL PLATING
CONTACT - BeCu, GOLD PLATING
SLEEVE - DELRIN
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC - 3 GHz
C. RETURN LOSS: -25 dB MIN @ 3 GHz
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: +65° C TO -165° C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOLRF,APH-HD-ISO-1023 AND DATE CODE"

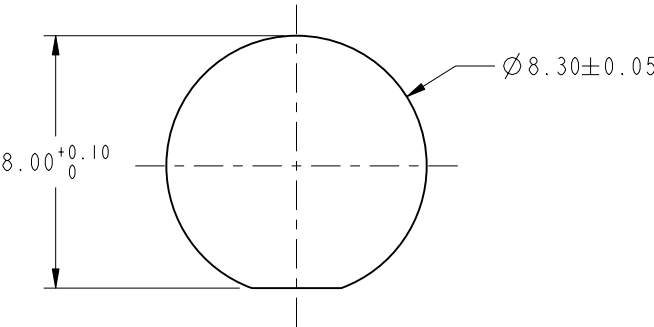

SCALE 4.200
RECOMMENDED MOUNTING
HOLE DIMENSIONS

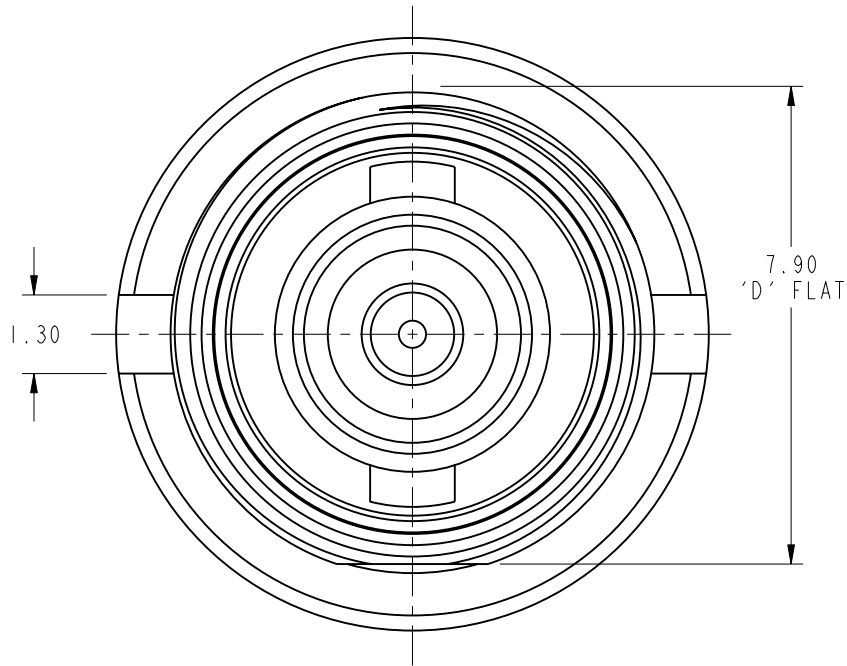

INTERFACE PER
349-50820
SERIES: HD-BNC JACK

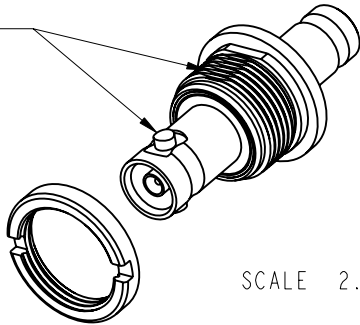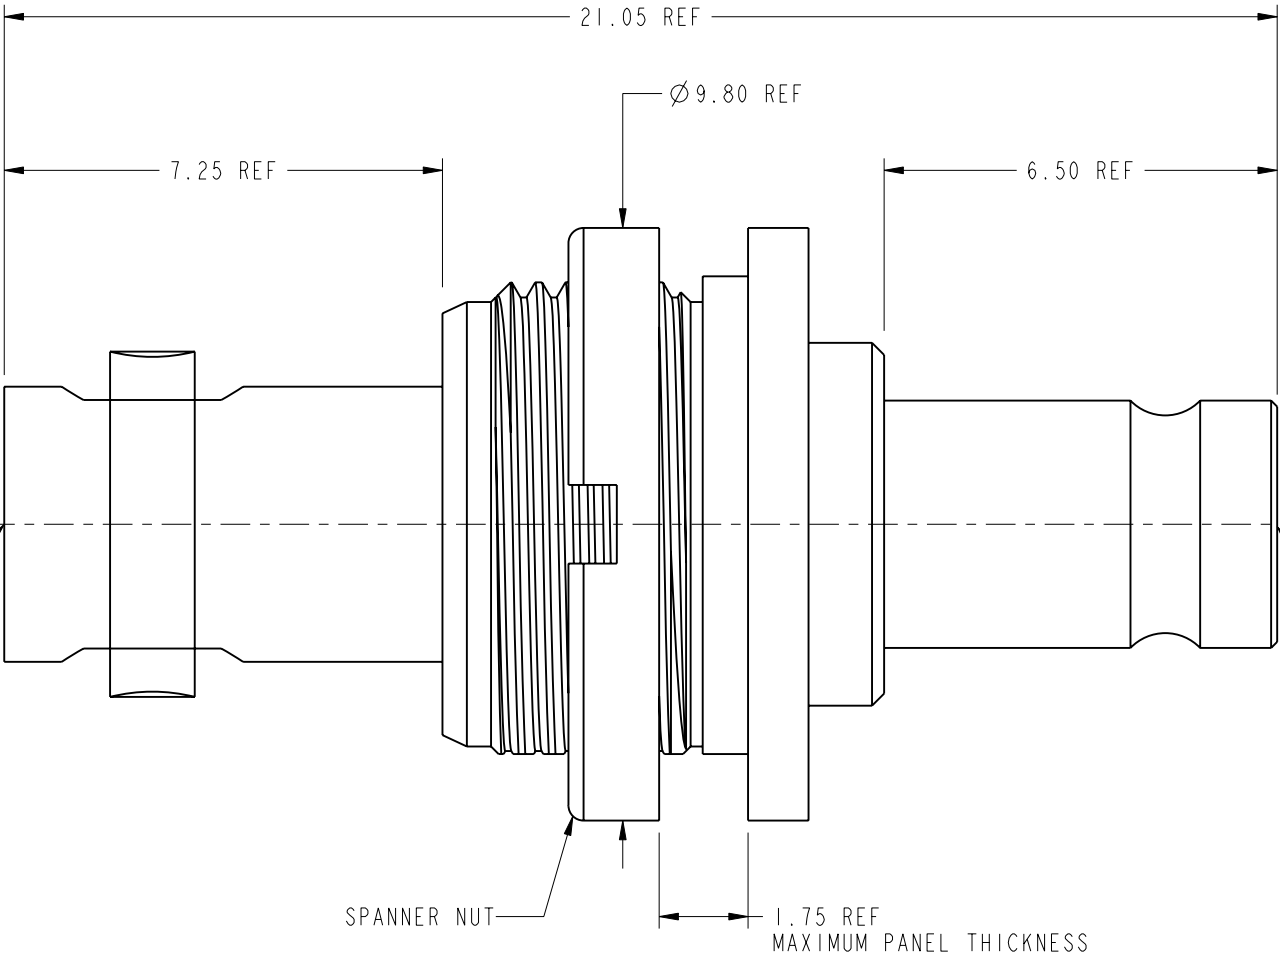

INTERFACE PER
CECC 22 230
SERIES: 1.0/2.3

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN	DATE	TITLE ISOLATED ADAPTER HD BNC STR JACK TO 1.0/2.3 JACK	Amphenol RF www.amphenolrf.com
	SEE NOTES	ENGINEER	DATE		
	REFERENCE	APPROVED	DATE		
	EAR # 4295 AND EXP:615X-2759-100	S.HSIEH	25-Jul-11	SCALE: 8.0:1.0 SHEET 2 OF 2	DRAWING NO.APH-HD-ISO-1023
	CONFIGURATION LEVEL: ☐ ☐ ☐ ☐	CAD FILE		DWG SIZE B REV B	ITEM NO.APH-HD-ISO-1023
	FINISH				PART NO.APH-HD-ISO-1023