

DBV-1 SERIES, 1WATT, REGULATED WITH 2:1 INPUT RANGE
FEATURES:

- ✓ 3 years warranty
- ✓ 1500Vdc isolation voltage
- ✓ Wide (2:1) input voltage range
- ✓ Regulated isolated twin output models
- ✓ Operating temperature range -40°C to +85°C
- ✓ Continuous short circuit protection



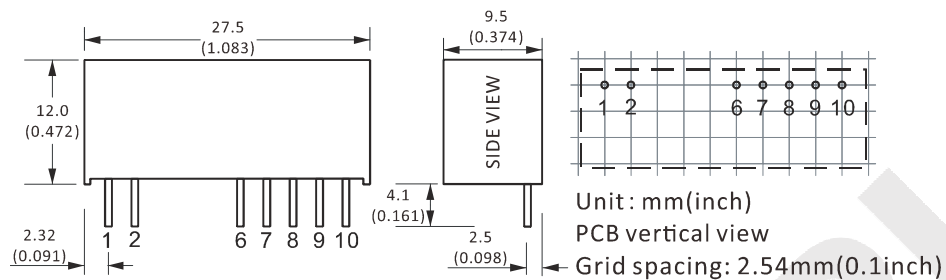
Model	Input voltage (Vdc)	Output voltage (Vdc)	Output current (mA)		Efficiency Typ.
			Min.	Max.	
DBV1-0501	5(4.5~9)	5, 5	10	100	80%
DBV1-0502		9, 9	5.5	55	80%
DBV1-0503		12, 12	4.0	40	80%
DBV1-0504		15, 15	3.3	33	80%
DBV1-0505		24, 24	2.1	21	80%
DBV1-1201	12(9~18)	5, 5	10	100	80%
DBV1-1202		9, 9	5.5	55	80%
DBV1-1203		12, 12	4.0	40	80%
DBV1-1204		15, 15	3.3	33	80%
DBV1-1205		24, 24	2.1	21	80%
DBV1-2401	24(18~36)	5, 5	10	100	80%
DBV1-2402		9, 9	5.5	55	80%
DBV1-2403		12, 12	4.0	40	80%
DBV1-2404		15, 15	3.3	33	80%
DBV1-2405		24, 24	2.1	21	80%

Notes: other input and output models may available on request.

ELECTRICAL

Line regulation	---	±0.2%
Load regulation	10% ~ 100% full load	±0.5%
Ripple and noise	---	100mVp-p max.
Isolation voltage	---	1500Vdc
Short circuit protection	---	Continuous short circuit protection
Operating temperature range	---	-40°C to +85°C
MTBF	---	1x10 ⁶ Hrs

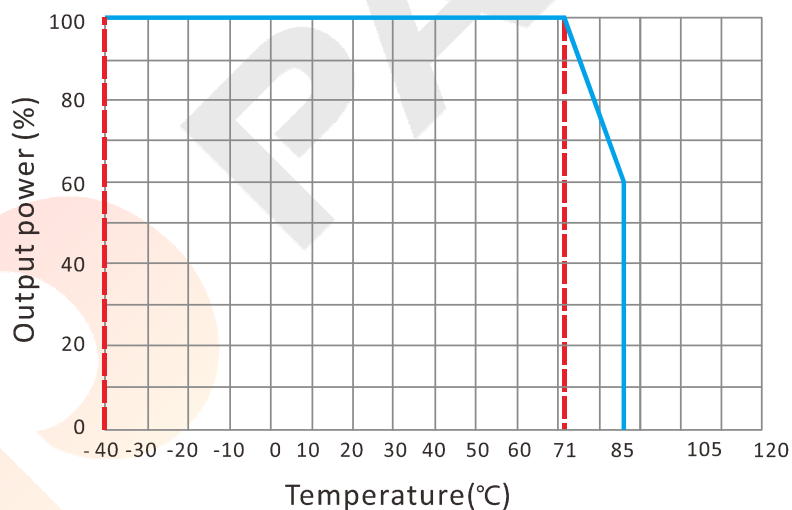
Notes: All the data in this article are under test with "TA+25°C, humidity<75%, rated input and rated load" mode.

DBV-1 SERIES, 1WATT, REGULATED WITH 2:1 INPUT RANGE
MECHANICAL

CONNECTION

PIN #	ISOLATED TWIN
1	GND
2	+Vin
6	+Vo1
7	-Vo1
8	CS
9	-Vo2
10	+Vo2

Note:

* Unit is mm(inch).

TEMPERATURE PROFILE

CAPACITIVE LOADS SELECTION

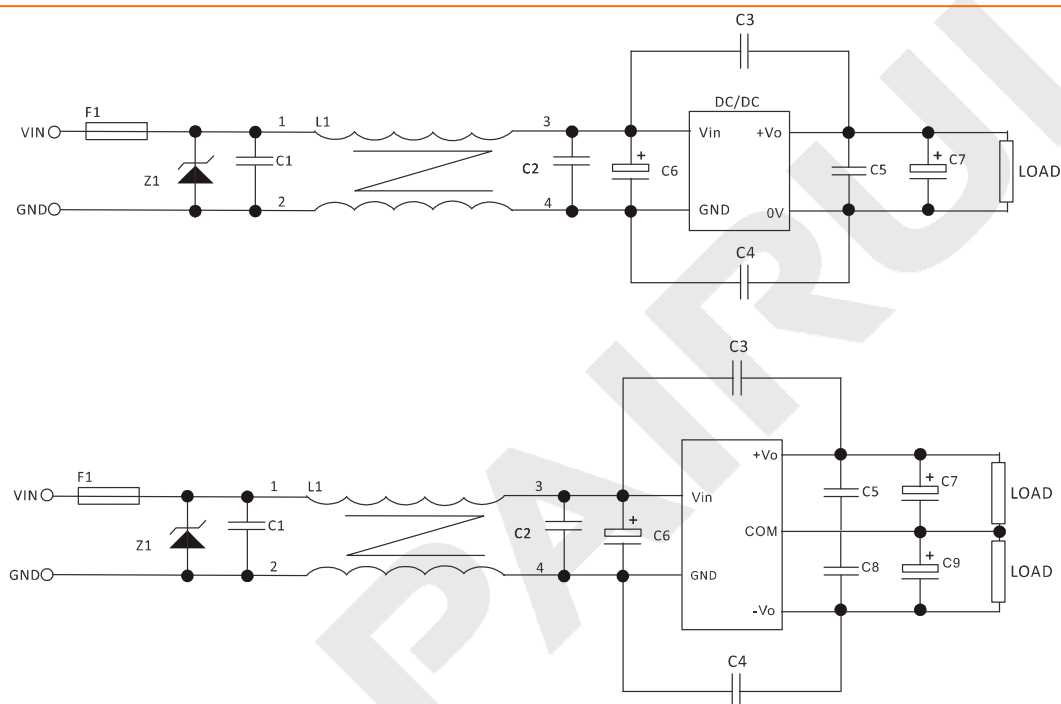
Vin (Vdc)	Cin (μF)	Single Output Voltage (Vdc)	Cout (μF)	Dual Output Voltage (Vdc)	Cout (μF)
5	4.7-100	5	560	±5	270
12	4.7-100	9	470	±9	220
24	4.7-100	12	470	±12	220
-	-	15/24	330	±15/±24	150/100

DBV-1 SERIES, 1WATT, REGULATED WITH 2:1 INPUT RANGE

NOTES

RECOMMENDED TEST AND APPLICATION CIRCUIT

In order to ensure the efficiency and dependability of the module, the minimum specified load must be less than 10% of rated load. If the output power is low, we recommend to add an external 10% loading resistor in parallel.



FUSE: depends on the actual input current;

TVS: depends on the actual input voltage;

Recommended capacitor: C1, C2, C5, about 0.1uF; for C6, C7, C9, please check the capacitive load; C3, C4: 2KV/1nF.