

BBQ SERIES, 1/4 BRICK, UP TO 250W

FEATURES:

- ✓ 5 years warranty
- ✓ Output current up to 50A
- ✓ 1500Vdc isolation voltage
- ✓ Efficiency up to 93%
- ✓ Operating temperature range -40°C to +85°C
- ✓ Under voltage, over current, short circuit, over voltage protection
- ✓ Remote on/off
- ✓ Adjustable output voltage



Model	Input voltage (Vdc)	Output voltage (Vdc)	Output current (A)	Efficiency Typ.
BBQ48-33V40	48(36~72)	3.3	40.0	90%
BBQ48-33V45		3.3	45.0	93%
BBQ48-33V50		3.3	50.0	93%
BBQ48-50V40		5.0	40.0	91%

Notes:

1. Other input and output models may available on request;
2. You may request for the models with heatsink, plus "R" in the suffix, e.g. BBQ48-33V40R.

ELECTRICAL

Input voltage range	48Vdc	36-72Vdc
Remote control	Negative logic	OFF: High level or left close ON: Low level or grounded
Output power	Input voltage range	130-200W
Output voltage	Single output	3.3/5Vdc
Output voltage accuracy	Input voltage range	±1%
Output voltage adjustable	Positive logic	±10%
Line regulation	Full load	±0.2%
Load regulation	10%-100% full load	±0.5%
Dynamic response (transient/recovery time)	25%-50%-75% load capability	$\Delta V_o/\Delta t$: ±4.0%/500 μ s
Ripple and noise	Parallel test, 20MHz wide range	70mVp-p max.
Operating frequency	Typical value	300KHz typ.
Isolation voltage	Input to output	1500Vdc
	Input to case	1050Vdc
	Output to case	500Vdc

BBQ SERIES, 1/4 BRICK, UP TO 250W


ELECTRICAL

Isolation resistance	---	10MΩ
Safety	---	IEC-60950-1, UL-60950-1 EN-60950-1, GB4943
Temperature coefficient	---	200ppm
Operating temperature range	Auxiliary heat sink	-40°C to +85°C
Storage temperature range	---	-40°C to +125°C
Over temperature protection	Typical	110°C typ.
Under voltage protection	---	Yes
Over current protection	---	Yes
Short circuit protection	---	Yes
Over voltage protection	---	Yes
Relative humidity	---	95% max.
Packing	---	Hole package
MTBF	Bellcore TR-332, 25°C	2x10 ⁶ Hrs


Notes: Unless otherwise specified, all the parameters of the test conditions are as follows: ambient temperature 25°C, the nominal input voltage, pure resistive nominal load.

MECHANICAL

WITHOUT HEATSINK

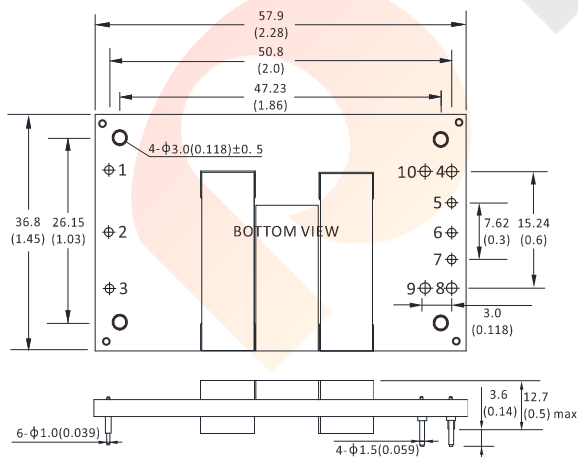


WITH HEATSINK

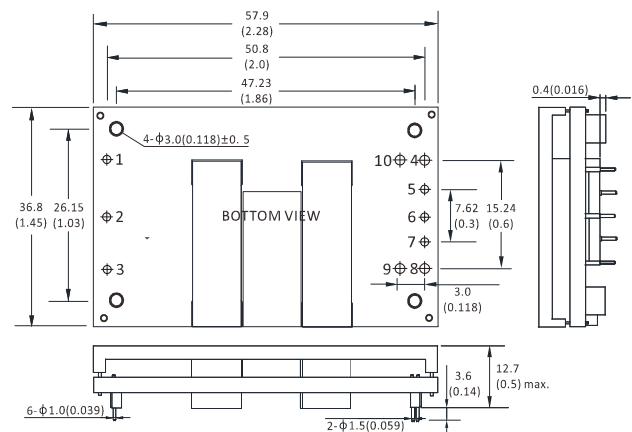

BBQ SERIES, 1/4 BRICK, UP TO 250W

MECHANICAL

PCB LAYOUT

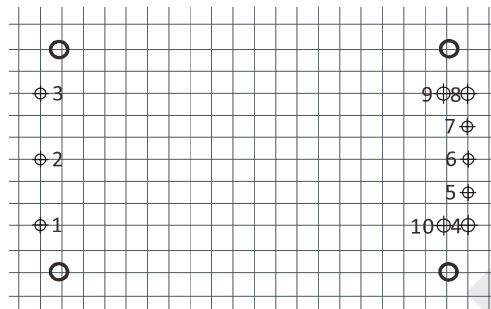


CONNECTION

PIN #	SINGLE
1	-Vin
2	REM
3	+Vin
4	GND
5	-S
6	TRIM
7	+S
8	+Vo1
9	+Vo1
10	GND


Note:


* Unit is mm(inch).

DERATING CURVE

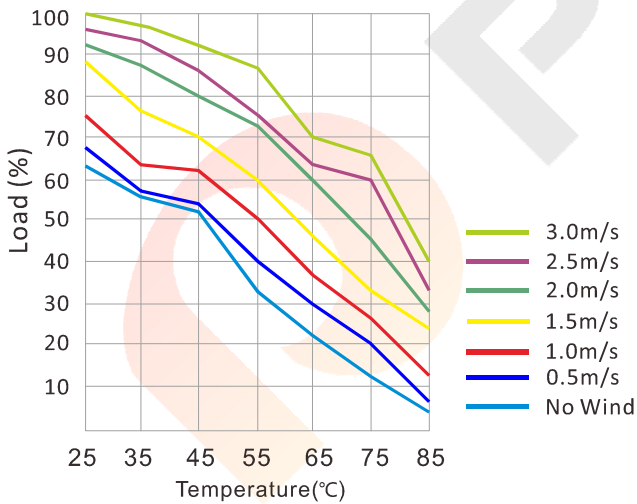

EFFICIENCY CURVE

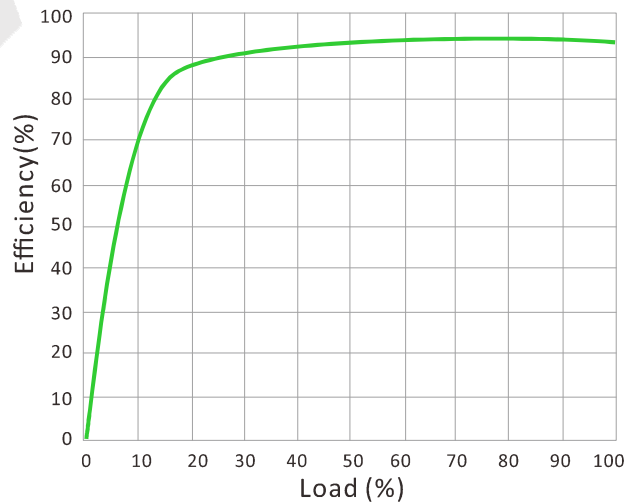

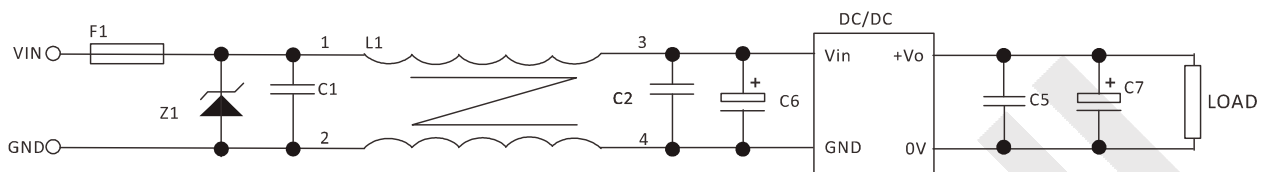BBQ SERIES, 1/4 BRICK, UP TO 250W
NOTES
RECOMMENDED TEST AND APPLICATION CIRCUIT


1. TVS&FUSE be helpful with over voltage protection and inrush limiting. Recommended FUSE better be 1.5~2times of the rated current .
2. The input filter capacitor C6 could select the aluminum electrolytic capacitors or tantalum capacitors, and the withstand voltage should be greater than the highest input voltage. Recommended capacitor should be between 22 μ F~100 μ F.
3. C1,C2 for the input filter capacitor,0.1~1 μ F high-frequency ceramics capacitor or chip capacitor are recommended. The withstand voltage of output filter C5, C7 should be greater than the highest output voltage. Recommended capacitor of C7 better within 100 μ F and C5 connected with the chip to reduce the input voltage peak, recommended 0.1~1 μ F high-frequency ceramics capacitor or chip capacitor.