


FIXED RESOLUTION INCREMENTAL ENCODERS, DHO5 RANGE, 100°C

DIGISINE, universal encoders :


- Through hollow shaft version Ø14mm, with reduction hubs in aluminium of 6, 8, 10 and 12 mm.
- Easy mounting for the hollow shafts thanks to DAC (Anti-Coupling Device).
- Robustness and excellent resistance to shocks / vibrations.
- High protection level IP65.
- High resolutions available : up to 80 000 cpt.
- Universal electronic circuits from 5 to 30 Vdc.
- High performances in temperature -30°C to 100°C (option -40°C).
- High performances in frequency of output signals : 300 kHz.



DHO5_14 connection G6R (radial M23), DAC 9445/015* mounted on body

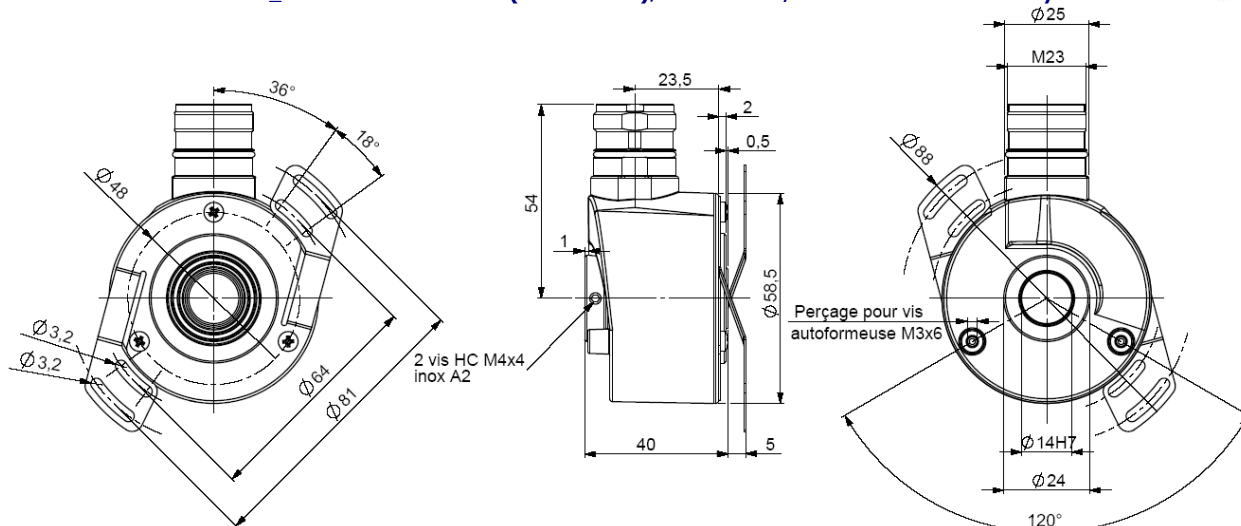

DHO5_14 connection G3R (radial cable), DAC 9445/015* mounted on cover

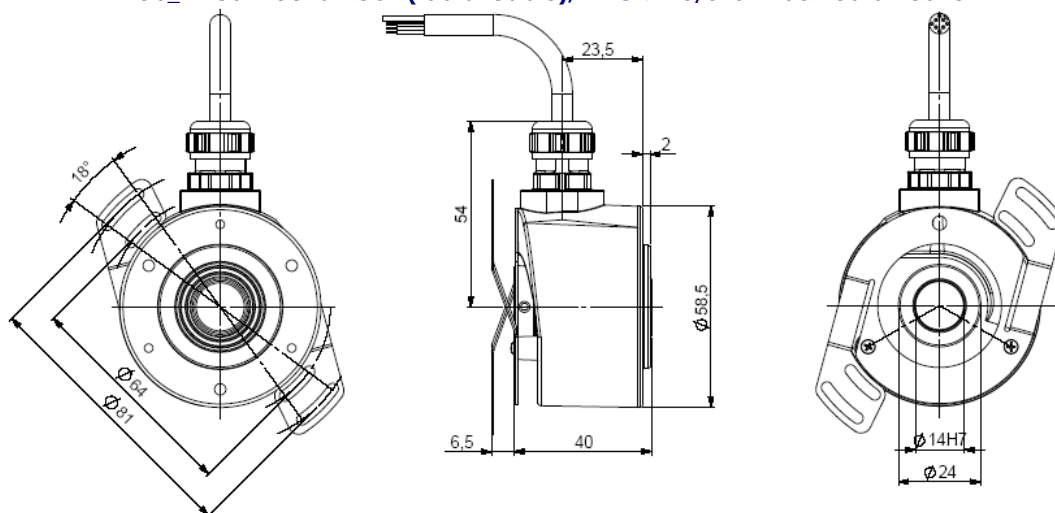


* Accessory to be ordered separately

Material	Cover : zinc alloy	Shocks (EN60068-2-27)	≤ 500 m.s ⁻² (during 6 ms)
	Body : aluminium	Vibrations (EN60068-2-6)	≤ 100 m.s ⁻² (55 ... 2 000 Hz)
	Shaft : stainless steel	EMC	EN 50081-1, EN 61000-6-2
Bearings	6 803 serie	Isolation	1 000 V eff
Maximum loads	Axial : 20 N	Encoder weight (approx.)	0,300 kg
	Radial : 50 N	Operating temperature	-30 ... + 100°C (encoder T°)
Shaft inertia	≤ 2,2.10 ⁻⁶ kg.m ²	Storage temperature	-40 ... + 100°C
Torque	≤ 6.10 ⁻³ N.m	Protection(EN 60529)	IP 65
Permissible max. speed	9 000 min ⁻¹	Torque (ring pressure screw)	nominal: 1.5 N.m, break: 2.0 N.m
Continuous max. speed	6 000 min ⁻¹	Theoretical mechanical lifetime 10 ⁹ turns (F _{axial} / F _{radial})	
Shaft seal	Viton	10N / 25N : 230	20N / 50N : 29


FIXED RESOLUTION INCREMENTAL ENCODERS, DHO5 RANGE, 100°C

DIGITAL OUTPUT SIGNALS (SQUARE WAVE SIGNALS)




Electronic 2G2 (100°C, 300kHz)

Supply : 5Vdc $\pm 10\%$
Cons. without load : 75mA max
Current per channel : 40mA max
0 max ($I_s=20mA$) : $V_{ol} = 0,5Vdc$
1 min ($I_s=20mA$) : $V_{oh} = 4Vdc$




Electronic PG5 (100°C, 300kHz)

Supply : 5 to 30Vdc
Cons. without load : 75mA max
Current per channel : 40mA max
0 max ($I_s=20mA$) : $V_{ol} = 0,5Vdc$
1 min ($I_s=20mA$) : $V_{oh} = V_{cc}-2,5Vdc$



Electronic RG2 (100°C, 300kHz)


Supply : 4,75 to 30Vdc
Cons. without load : 75mA max
Current per channel : 40mA max
0 max ($I_s=20mA$) : $V_{ol} = 0,5Vdc$
1 min ($I_s=20mA$) : $V_{oh} = 4Vdc$



Electronic 5GT (70°C, 120kHz)

Supply : 11 to 30Vdc
Cons. without load : 75mA max
Current per channel : 40mA max
0 max ($I_s=20mA$) : $V_{ol} = 1,5Vdc$
1 min ($I_s=20mA$) : $V_{oh} = V_{cc}-2,5Vdc$

SINE WAVE OUTPUT SIGNALS



Electronic 2WT (100°C)

Supply : 5Vdc $\pm 10\%$
Cons. without load : 75mA max
Output signals :
1Vpp (peak to peak)

ELECTRONIC PROTECTIONS

Protection against short circuits of the electronics: 2G2, RG2, PG5, 5GT and 2WT
Protection against reverse polarity for all the electronics except 2G2 and 2WT

Consult us for special electronics : programmable resolution, 100mA per channel...

STANDARD CONNECTIONS

		-	+	A or S	B or C	0 or Z	A/ or S/	B/ or C/	0/ or Z/	Ground
G6	M23 - 12 pins CW	1	2	3	4	5	6	7	8	Connect or Body
G8	M23 - 12 pins CCW	10 + 11	2 + 12	8	5	3	1	6	4	Connect or Body
G3	PVC cable 8 wires 8230/020	WH white	BN brown	GN green	YE yellow	GY grey	PK pink	BU blue	RD red	General shielding
GP	PUR cable 12 wires 8230/050	WH white + WH/GN white /green	BU blue + BN/GN brown / green	GY grey	BN brown	RD red	PK pink	GN green	BK black	General shielding

ORDERING REFERENCE (Contact the factory for special versions, ex: electronics, special flanges, connections...)

	Shaft Ø	Digital signals (Square wave)				Connection	Connection orientation
DHO5	14 : 14mm reduction hubs available up to 6mm	Electronics : 2G2, PG5, RG2 , 5GT		Output signals	resolution	G6: M23 12 pins CW	R : radial
		Supply	Output stage	9 : A,A/,B,B/,0,0/ (0 gated A & B)	80 000 max	G5 : M23 12 pins CW	
		2 : 5Vdc	G2 : driver 5Vdc RS422			G8 : M23 12 pins CCW	
		5 : 11 to 30Vdc	G5 : push-pull 5-30Vdc			G2 : DIN 5 pins	
		P : 5 to 30Vdc	GT : transistorized push-pull 11-30Vdc			GD: DIN 8 pins	
		R : 4.75 to 30Vdc					
		Sine-wave signals				GP : PUR cable 12 wires	Example :
		2: 5Vdc	WT: sine 1Vpp	9: S,S/,C,C/,Z,Z/	2 500 max	G3 : PVC cable 8 wires	R020 : radial cable 2m
Ex: DHO5	14 //	P	G5	9 //	80 000 //	GP	R020

Available resolutions (100°C electronic) : 50 60 100 120 125 127 150 180 200 240 250 256 300 314 360 375 400 500 512 600 720 750 768 800 927 1000 1024 1200 1250 1280 1440 1500 1800 2000 2048 2400 2500 3000 3600 4000 4096 5000 6000 7200 8000 8192 10000

Interpolated available resolutions (70°C electronic) : 1080 2560 2880 3072 4320 5120 7500 5760 9000 10240 10800 12000 12500 12288 14400 15000 16000 16384 18000 20000 20480 24000 25000 28800 30000 32000 32768 36000 40000 40960 43200 48000 49152 50000 57600 60000 64000 65536 80000

Available resolutions sine-wave signals (100°C electronic) : 250 256 360 500 1024 2500

Nota : The maximal resolution with the 5GT electronic is 5 000 pulses per turn (non available electronic with interpolation)

Made in France