

CD150 potentiometric output – Measurement range 0 up to 6000 mm




Specifications:

Measurement range	0 up to 6000 mm
Output signal	1k Ω (other values on demand)
Resolution	Quasi infinite (depends on the operating system)
Material	Body and cover - Aluminium (RohS) Measuring cable – Stainless steel
Cable diameter	0,60 mm
Detection element	Precision potentiometer
Connection	Male connector M16 – DIN 3 pin Male connector M12 – 4 pin PVC cable – 4 wires
Standard linearity	+/- 0,15% f.s. +/- 0,10% f.s. (optional)
Protection class	IP54 (option IP67)
Max. Velocity	10 m/s
Max. Acceleration	5 m/s ² (before cable deformation)
Weight	≈ 3000 g
Operating temperature	-20° to +80°C
Storage temperature	-30° to +80°C

Cable forces:

Measurement range in mm	Min. pull-out force	Max. pull-out force
4000	≈ 11,00 N	≈ 13,50 N
6000	≈ 10,00 N	≈ 13,50 N

Ordering reference:

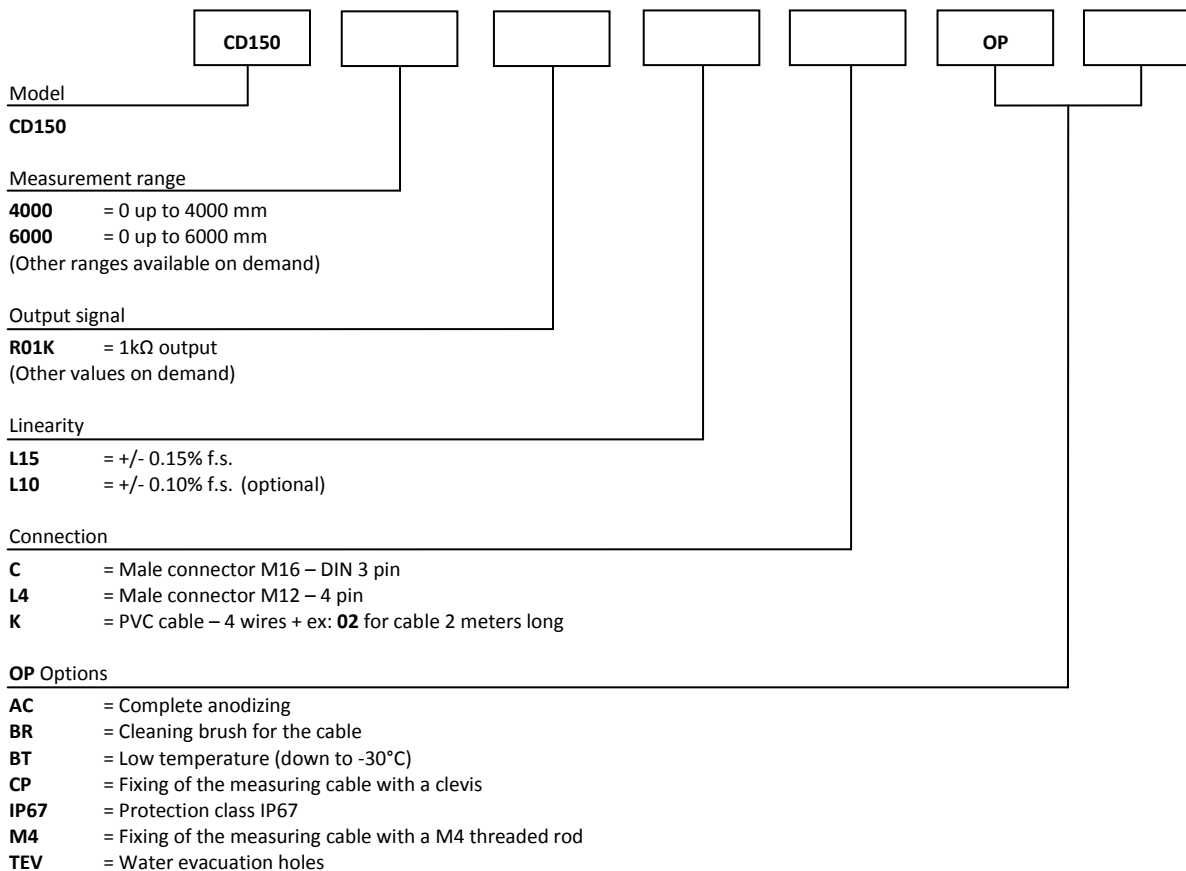


Reference example: CD150-4000-R01K-L15-K02-OP-AC-M4

Made in France

CD150 potentiometric output – Measurement range 0 up to 6000 mm

Dimensional Drawing

Measurement range up to 4000 mm

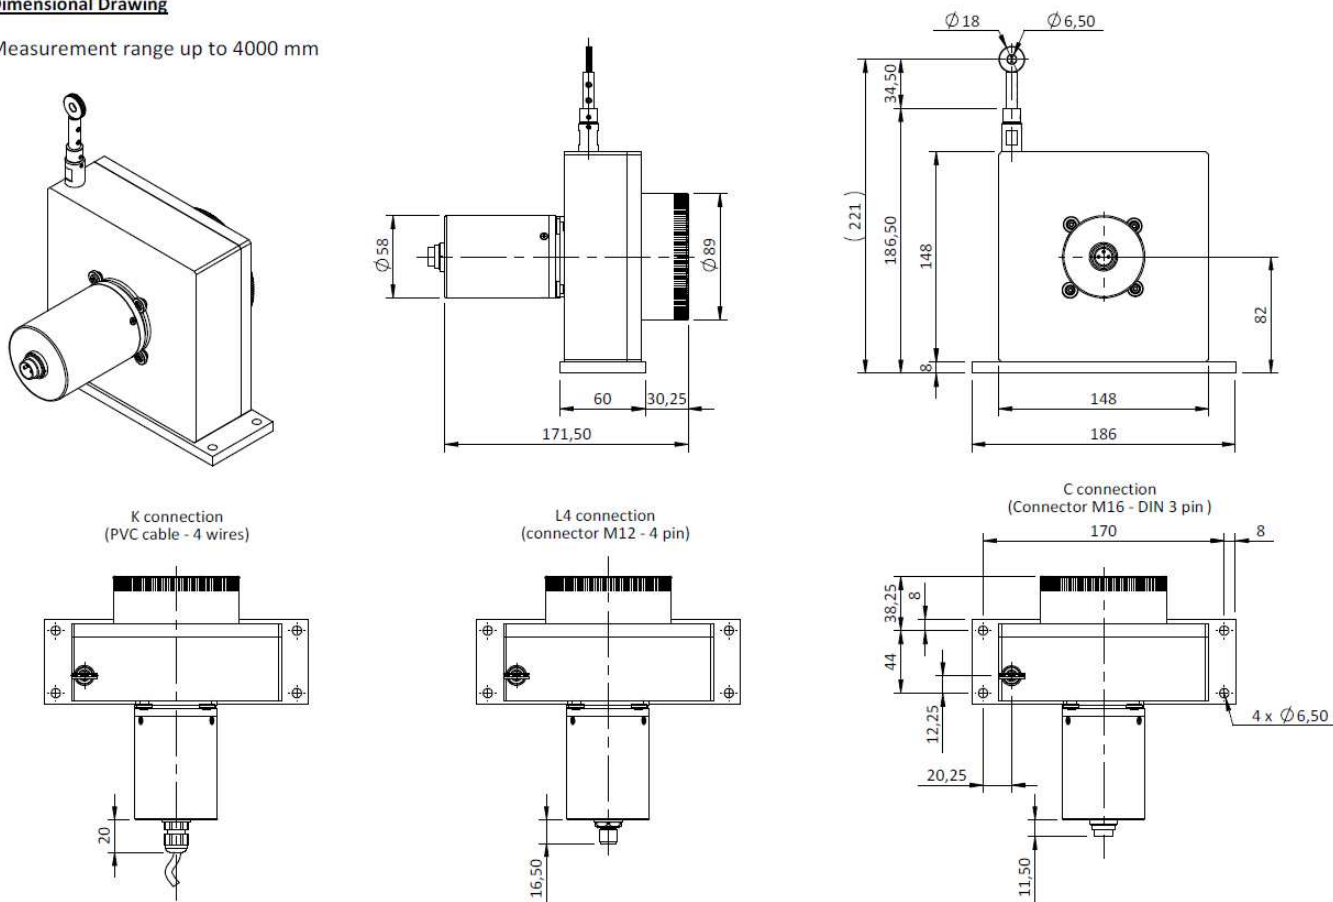

Measuring range greater than 4000 mm up to 6000 mm

