


## INCREMENTAL ENCODERS, DHO5S HEAVY-DUTY RANGE, 120°C

DHO5S encoders are specially designed for hoisting motors application:

- Through hollow shaft version  $\varnothing 14\text{mm}$ ,
- Robustness and excellent resistance to shocks/vibrations "long life system",
- High protection level IP65,
- Electronics: 5Vdc - RS422 - TTL circuits,
- High performances in temperature  $-30^{\circ}\text{C}$  to  $120^{\circ}\text{C}$ ,
- Resolution: 1024 ppr,
- Connection: cable output with M23 connector,
- Easy mounting thanks to adapted DAC (Anti-Coupling Device).



### DHO5S DIMENSIONS

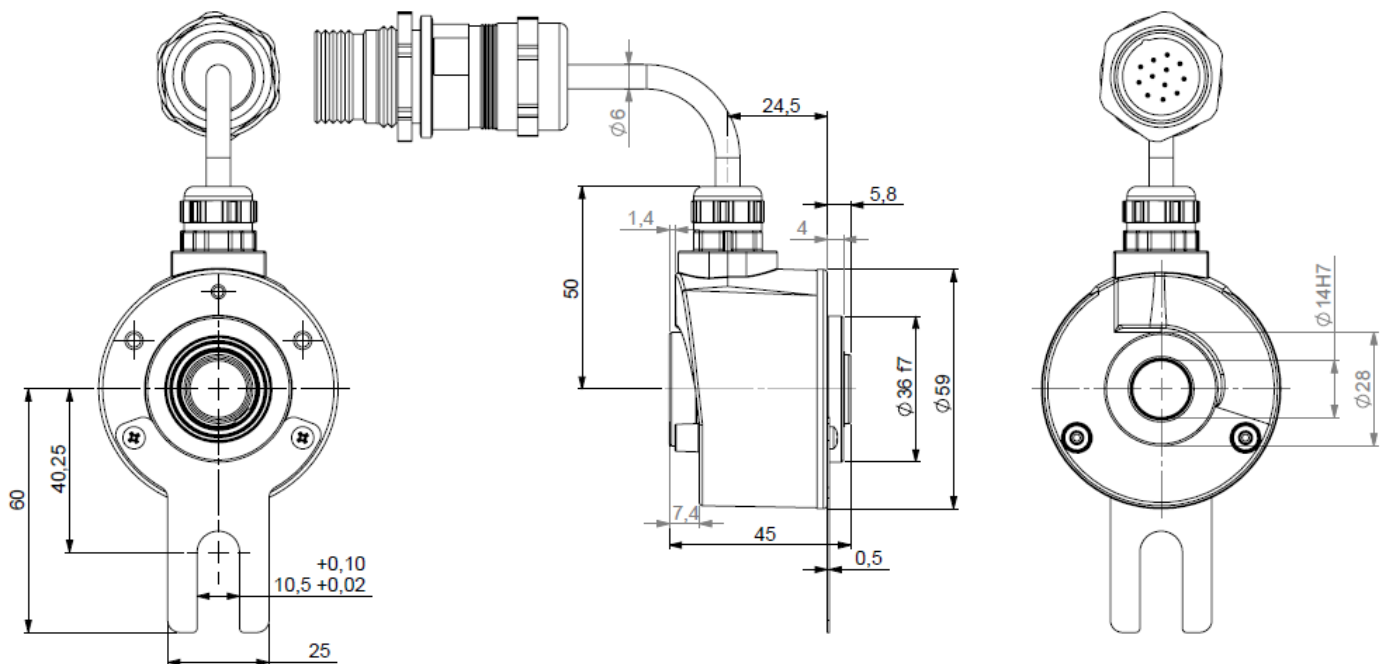

### MECHANICAL CHARACTERISTICS

Material	Cover: zinc alloy	Permissible max. speed	6 000 $\text{min}^{-1}$
	Body: aluminium	Continuous max. speed	4 000 $\text{min}^{-1}$
	Shaft: stainless steel	Shocks (EN60068-2-27)	$\leq 2\,000 \text{ m.s}^{-2}$ (during 6 ms)
Bearings	Sealed ball bearings	Vibrations (EN60068-2-6)	$\leq 100 \text{ m.s}^{-2}$ (55 ... 2 000 Hz)
	High temperature grease	EMC	EN 50081-1, EN 61000-6-2
Maximum loads	Axial: 20 N	Isolation	1 000 V eff
	Radial: 50 N	Encoder weight (approx.)	0,500 kg
Shaft inertia	$\leq 2,2 \cdot 10^{-6} \text{ kg.m}^2$	Operating temperature	$-30 \dots +120^{\circ}\text{C}$ (encoder <sup>®</sup> )
Torque	$\leq 6 \cdot 10^{-3} \text{ N.m}$	Storage temperature	$-40 \dots +100^{\circ}\text{C}$
Protection (EN 60529)	IP 65	Torque (ring pressure screw)	nominal: 1.5 N.m, break: 2.0 N.m

## INCREMENTAL ENCODERS, DHO5S HEAVY-DUTY RANGE, 120°C

### OUTPUT SIGNALS

#### Signals A, B, 0


The channel B (mounting front) arrives before A clockwise seen from the bearings housing - DAC side.

Period : 360° - Cycle ratio : 180°


The shift  $\alpha$  between each fronts is given by the formula  $\alpha > 135/F$  ( $\alpha$  in time in microsecond, F frequency in kHz, ex: 100kHz,  $\alpha > 1,35\mu s$ )

The 90° electrical phase-shift between A and B signals determines the rotation direction:

- clockwise (seen from DAC side) during the mounting front of A, B signal is '1',
- counterclockwise, during mounting front of A, B channel is '0'.

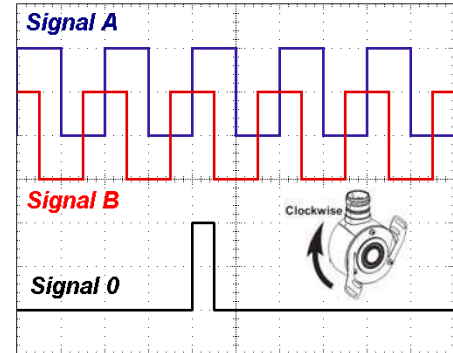

### DIGITAL OUTPUT SIGNALS

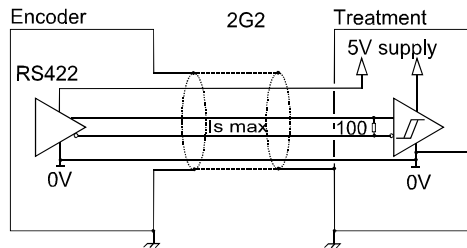

#### Electronic 2G2 - 150kHz

Supply : 5Vdc  $\pm 10\%$

Cons. without load : 75mA max

Current per channel : 40mA max

0 max ( $I_s=20mA$ ) :  $V_{ol} = 0,5Vdc$

1 min ( $I_s=20mA$ ) :  $V_{oh} = 4Vdc$

### TABLE 1: CONNECTION TYPE 01 WHICH CORRESPONDS TO THE ENCODERS

Pino ut 1 White	Pino ut 2 Brown	Pino ut 3 Green	Pino ut 4 Yellow	Pino ut 5 Grey	Pino ut 6 Pink	Pino ut 7 Blue	Pino ut 8 Red	Pino ut 9 NC	Pino ut 10 Shield	Pino ut 11 Shield	Pino ut 12 Shield
0V	+Vcc	A	B	0	A/	B/	0/	NC	Shield	Shield	Shield

DHO5 has a cable output with at the end a welded M23 connector.

### ORDERING REFERENCE (Contact the factory for special versions, ex: electronics, special flanges, connections...)

Type	Shaft $\varnothing$	Mechanics	Supply	Output	Signals	Electronics	Resolution	Connection	DAC system
DHO5S	14 : 14mm	HE Shockproof & High temperature mechanics	2 : 5Vdc	G2 : driver 5Vdc RS422/TTL	9 : A,A/ B,B/ 0,0/ (0 gated A & B)	HE High temperature electronics	1 024 max	G3R004/ 01L 40m cable & M23 connector Cf table 1	**DG** 9445/036 DAC system
Ex: DHO5S	14 /	HT /	2	G2	9 /	HT /	01 024//	G3R004/ 01L	**DG**

### AVAILABLE RESOLUTIONS

50 60 100 120 125 127 150 180 200 240 250 256 300 314 360 375 400 500 512 600 720 750 768 800 927 1000 1024

Made in France