


SDS01 SDH01 SERIES

DC-DC CONVERTER

2:1 WIDE INPUT RANGE
UP TO 1.08 WATTS

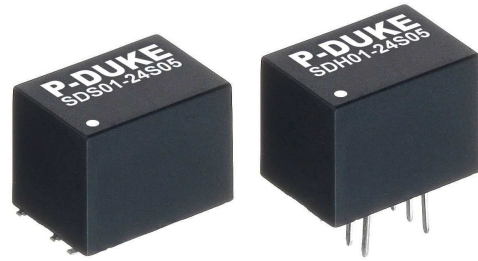

FEATURES

- ULTRA SMALL SMD AND DIP PACKAGE, 0.52 x 0.36x 0.40 INCH WITH REGULATED
- SMD PACKAGE QUALIFIED FOR LEADFREE REFLOW SOLDER PROCESS ACCORDING IPC J-STD-020D
- NO MINIMUM LOAD REQUIRED
- CONTINUOUS SHORT CIRCUIT PROTECTION
- 1600VDC INPUT TO OUTPUT ISOLATION AND 3000VDC FOR OPTION
- SAFETY MEETS UL60950-1, EN60950-1, & IEC60950-1
- CE MARKED
- COMPLIANT TO RoHS

APPLICATIONS

- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- MEASUREMENT EQUIPMENT
- SEMICONDUCTOR EQUIPMENT

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted



Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	µF
SDS(H)01-05S3P3	4.5 ~ 9	3.3	300	35	79	1680
SDS(H)01-05S05	4.5 ~ 9	5	200	35	80	820
SDS(H)01-05S12	4.5 ~ 9	12	90	40	83	470
SDS(H)01-05S15	4.5 ~ 9	15	70	40	82	330
SDS(H)01-05S24	4.5 ~ 9	24	45	40	82	160
SDS(H)01-05D05	4.5 ~ 9	±5	±100	40	81	±470
SDS(H)01-05D12	4.5 ~ 9	±12	±45	40	82	±330
SDS(H)01-05D15	4.5 ~ 9	±15	±35	40	82	±220
SDS(H)01-12S3P3	9 ~ 18	3.3	300	16	78	1680
SDS(H)01-12S05	9 ~ 18	5	200	16	79	820
SDS(H)01-12S12	9 ~ 18	12	90	22	82	470
SDS(H)01-12S15	9 ~ 18	15	70	22	81	330
SDS(H)01-12S24	9 ~ 18	24	45	22	80	160
SDS(H)01-12D05	9 ~ 18	±5	±100	22	80	±470
SDS(H)01-12D12	9 ~ 18	±12	±45	22	80	±330
SDS(H)01-12D15	9 ~ 18	±15	±35	22	80	±220
SDS(H)01-24S3P3	18 ~ 36	3.3	300	8	78	1680
SDS(H)01-24S05	18 ~ 36	5	200	8	80	820
SDS(H)01-24S12	18 ~ 36	12	90	10	81	470
SDS(H)01-24S15	18 ~ 36	15	70	10	81	330
SDS(H)01-24S24	18 ~ 36	24	45	10	80	160
SDS(H)01-24D05	18 ~ 36	±5	±100	10	79	±470
SDS(H)01-24D12	18 ~ 36	±12	±45	10	80	±330
SDS(H)01-24D15	18 ~ 36	±15	±35	10	81	±220
SDS(H)01-48S3P3	36 ~ 75	3.3	300	5	79	1680
SDS(H)01-48S05	36 ~ 75	5	200	5	80	820
SDS(H)01-48S12	36 ~ 75	12	90	5	82	470
SDS(H)01-48S15	36 ~ 75	15	70	5	83	330
SDS(H)01-48S24	36 ~ 75	24	45	5	81	160
SDS(H)01-48D05	36 ~ 75	±5	±100	5	80	±470
SDS(H)01-48D12	36 ~ 75	±12	±45	5	81	±330
SDS(H)01-48D15	36 ~ 75	±15	±35	5	81	±220

PART NUMBER STRUCTURE

SDS01 - 48 S 05 H

Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Isolation Option
SDS: SMD type SDH: DIP type	05: 4.5~9 12: 9~18 24: 18~36 48: 36~75	S: Single	3P3: 3.3 05: 5 12: 12 15: 15 24: 24	<input type="checkbox"/> : Standard type 1600VDC isolation H: 3000VDC isolation
		D: Dual	05: ± 5 12: ± 12 15: ± 15	

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	5Vin(nom)	4.5	5	9	VDC
	12Vin(nom)	9	12	18	
	24Vin(nom)	18	24	36	
	48Vin(nom)	36	48	75	
Start up time	Constant resistive load Power up Remote ON/OFF		5	10	ms
			5	10	
Input surge voltage	1 second, max.			15	VDC
				25	
				50	
				100	
Input reflected ripple current ⁽¹⁾	5Vin(nom) 12Vin(nom) 24Vin(nom) 48Vin(nom)		10		mA _{p-p}
			10		
			10		
			10		
Input filter		Capacitor type			
Remote ON/OFF	Ctrl pin applied current via 1kΩ DC-DC ON DC-DC OFF Remote off input current	Open or high impedance			
		2.0	3.0	4.0	mA
				2.5	mA
<p>Application circuit</p> <p>DC-DC ON</p>  <p>DC-DC OFF</p> 					

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit	
Voltage accuracy		-1.0		+1.0	%	
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%	
Load regulation	No Load to Full Load	Single		+1.0	%	
		Dual		+1.0		
	10% Load to 90% Load	Single	-0.5			+0.5
		Dual	-0.8			+0.8
Cross regulation	Asymmetrical load 25%/100% FL	-5.0		+5.0	%	
Ripple and noise	Measured by 20MHz bandwidth		50		mV _{p-p}	
Temperature coefficient		-0.02		+0.02	%/°C	
Transient response recovery time	25% load step change		500		μs	
Short circuit protection		Continuous, automatic recovery				

GENERAL SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Standard Suffix "H"	1600			VDC
Isolation resistance	500VDC		3000			GΩ
Isolation capacitance		Standard Suffix "H"	1		50	pF
Switching frequency			100		50	kHz
Safety meets						UL60950-1 EN60950-1 IEC60950-1
Case material						Non-conductive black plastic
Base material						Non-conductive black plastic
Potting material						Silicone (UL94 V-0)
Weight						2.7g (0.10oz)
MTBF	MIL-HDBK-217F, Full load					8.534 x 10 ⁶ hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating ambient temperature		Without derating	-40		+90	°C
Storage temperature range			-55		+125	°C
Thermal shock						MIL-STD-810F
Vibration						MIL-STD-810F
Relative humidity						5% to 95% RH
Lead-free reflow solder process						IPC J-STD-020D
Moisture sensitivity level(MSL)						IPC J-STD-033B Level 2

EMC SPECIFICATIONS


Parameter	Conditions		Level		
EMI (1)	EN55022		Class A, Class B		
ESD	EN61000-4-2	Air ± 8kV Contact ± 6kV	Perf. Criteria A		
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A		
Fast transient (2)	EN61000-4-4	± 2kV	Perf. Criteria A		
Surge (2)	EN61000-4-5	± 1kV	Perf. Criteria A		
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A		

Note:


- The standard modules meet EMI Class A or Class B and input reflected ripple current with external components. For further information, please contact with P-DUKE.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220 μF/100V.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

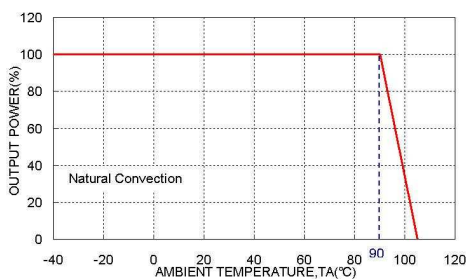

SDS(H)01-48S05 Derating Curve

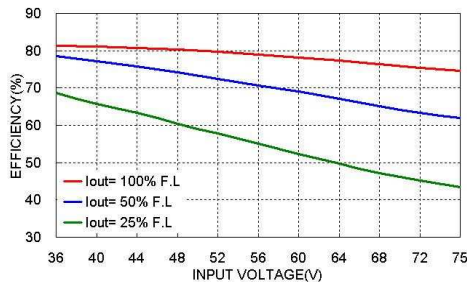


SDS(H)01-48S05 Efficiency VS Input Voltage

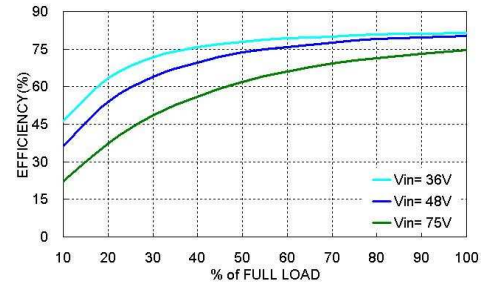

SDS(H)01-48S05 Efficiency VS Output Current

MECHANICAL DRAWING

SDS01

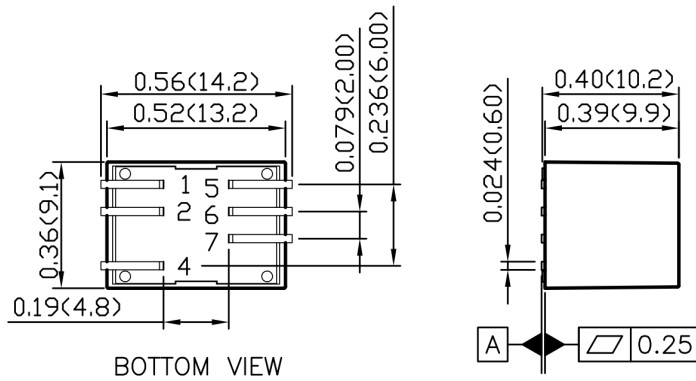

PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
4	Ctrl	Ctrl
5	NC	-Vout
6	-Vout	Common
7	+Vout	+Vout

1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)
x.xxx±0.01 (x.xx±0.25)
3. Pin pitch tolerance ±0.01 (0.25)
4. Pin dimension tolerance ±0.004(0.1)

SDH01

