

# PDL02 SERIES

DC-DC CONVERTER

2:1 WIDE INPUT RANGE  
UP TO 2 Watts



## FEATURES

- NO MINIMUM LOAD REQUIRED
- UP TO 3000VDC INPUT TO OUTPUT ISOLATION
- SMALL SIZE AND LOW PROFILE : 0.86 X 0.36 X 0.44 INCH
- LOW OUTPUT RIPPLE AND NOISE
- UL60950-1, EN60950-1, & IEC60950-1 SAFETY APPROVALS
- CE MARKED
- COMPLIANT TO RoHS II & REACH

## APPLICATIONS

- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- DISTRIBUTED POWER ARCHITECTURES
- SEMICONDUCTOR EQUIPMENT

| 3000VDC<br>ISOLATION | 1600VDC<br>ISOLATION | REMOTE<br>CONTROL | OCP | SCP |
|----------------------|----------------------|-------------------|-----|-----|
|----------------------|----------------------|-------------------|-----|-----|

## TECHNICAL SPECIFICATION


All specifications are typical at nominal input, full load and 25°C otherwise noted

| Model Number | Input Range | Output Voltage | Output Current @Full Load | Input Current @ No Load | Efficiency | Maximum Capacitor Load |
|--------------|-------------|----------------|---------------------------|-------------------------|------------|------------------------|
|              | VDC         | VDC            | mA                        | mA                      | %          | μF                     |
| PDL02-05S33  | 4.5 ~ 9     | 3.3            | 500                       | 35                      | 76         | 2200                   |
| PDL02-05S05  | 4.5 ~ 9     | 5              | 400                       | 35                      | 80         | 1000                   |
| PDL02-05S09  | 4.5 ~ 9     | 9              | 222                       | 40                      | 82         | 470                    |
| PDL02-05S12  | 4.5 ~ 9     | 12             | 167                       | 40                      | 81         | 170                    |
| PDL02-05S15  | 4.5 ~ 9     | 15             | 134                       | 40                      | 83         | 110                    |
| PDL02-05D05  | 4.5 ~ 9     | ±5             | ±200                      | 40                      | 79         | ±470                   |
| PDL02-05D12  | 4.5 ~ 9     | ±12            | ±83                       | 40                      | 82         | ±100                   |
| PDL02-05D15  | 4.5 ~ 9     | ±15            | ±67                       | 40                      | 81         | ±47                    |
| PDL02-12S33  | 9 ~ 18      | 3.3            | 500                       | 20                      | 77         | 2200                   |
| PDL02-12S05  | 9 ~ 18      | 5              | 400                       | 20                      | 81         | 1000                   |
| PDL02-12S09  | 9 ~ 18      | 9              | 222                       | 20                      | 82         | 470                    |
| PDL02-12S12  | 9 ~ 18      | 12             | 167                       | 20                      | 83         | 170                    |
| PDL02-12S15  | 9 ~ 18      | 15             | 134                       | 20                      | 84         | 110                    |
| PDL02-12D05  | 9 ~ 18      | ±5             | ±200                      | 30                      | 81         | ±470                   |
| PDL02-12D12  | 9 ~ 18      | ±12            | ±83                       | 30                      | 83         | ±100                   |
| PDL02-12D15  | 9 ~ 18      | ±15            | ±67                       | 30                      | 84         | ±47                    |
| PDL02-24S33  | 18 ~ 36     | 3.3            | 500                       | 15                      | 78         | 2200                   |
| PDL02-24S05  | 18 ~ 36     | 5              | 400                       | 15                      | 81         | 1000                   |
| PDL02-24S09  | 18 ~ 36     | 9              | 222                       | 15                      | 82         | 470                    |
| PDL02-24S12  | 18 ~ 36     | 12             | 167                       | 15                      | 83         | 170                    |
| PDL02-24S15  | 18 ~ 36     | 15             | 134                       | 15                      | 84         | 110                    |
| PDL02-24D05  | 18 ~ 36     | ±5             | ±200                      | 15                      | 80         | ±470                   |
| PDL02-24D12  | 18 ~ 36     | ±12            | ±83                       | 15                      | 83         | ±100                   |
| PDL02-24D15  | 18 ~ 36     | ±15            | ±67                       | 15                      | 82         | ±47                    |
| PDL02-48S33  | 36 ~ 75     | 3.3            | 500                       | 8                       | 76         | 2200                   |
| PDL02-48S05  | 36 ~ 75     | 5              | 400                       | 8                       | 78         | 1000                   |
| PDL02-48S09  | 36 ~ 75     | 9              | 222                       | 8                       | 84         | 470                    |
| PDL02-48S12  | 36 ~ 75     | 12             | 167                       | 8                       | 83         | 170                    |
| PDL02-48S15  | 36 ~ 75     | 15             | 134                       | 8                       | 83         | 110                    |
| PDL02-48D05  | 36 ~ 75     | ±5             | ±200                      | 8                       | 80         | ±470                   |
| PDL02-48D12  | 36 ~ 75     | ±12            | ±83                       | 8                       | 81         | ±100                   |
| PDL02-48D15  | 36 ~ 75     | ±15            | ±67                       | 8                       | 81         | ±47                    |

## PART NUMBER STRUCTURE

| Series Name | Input Voltage (VDC)                             | Output Quantity          | Output Voltage (VDC)                                                              | Isolation Option                         |
|-------------|-------------------------------------------------|--------------------------|-----------------------------------------------------------------------------------|------------------------------------------|
| PDL02 -     | <b>48</b>                                       | <b>S</b>                 | <b>05</b>                                                                         | <b>H</b>                                 |
|             | 05: 4.5~9<br>12: 9~18<br>24: 18~16<br>48: 36~75 | S: Single<br><br>D: Dual | 33: 3.3<br>05: 5<br>09: 9<br>12: 12<br>15: 15<br><br>05: ±5<br>12: ±12<br>15: ±15 | □: Standard type<br>H: 3000VDC isolation |

## INPUT SPECIFICATIONS
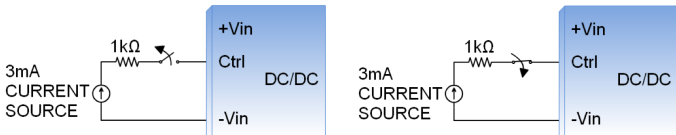
| Parameter                      | Conditions                                                                                                                                                                                                                        | Min.                 | Typ.                     | Max.                  | Unit           |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------|-----------------------|----------------|
| Operating input voltage range  | 5Vin(nom)<br>12Vin(nom)<br>24Vin(nom)<br>48Vin(nom)                                                                                                                                                                               | 4.5<br>9<br>18<br>36 | 5<br>12<br>24<br>48      | 9<br>18<br>36<br>75   | VDC            |
| Start up time                  | Constant resistive load<br>Power up<br>Remote ON/OFF                                                                                                                                                                              |                      | 5<br>5                   |                       | ms             |
| Input surge voltage            | 100 ms, max.<br>5Vin(nom)<br>12Vin(nom)<br>24Vin(nom)<br>48Vin(nom)                                                                                                                                                               |                      |                          | 15<br>36<br>50<br>100 | VDC            |
| Input reflected ripple current | With external input capacitors<br>5Vin(nom)<br>12Vin(nom)<br>24Vin(nom)<br>48Vin(nom)                                                                                                                                             |                      | 400<br>150<br>380<br>170 |                       | mAp-p          |
| Input filter <sup>(1)</sup>    |                                                                                                                                                                                                                                   |                      |                          |                       | Capacitor type |
| Remote ON/OFF                  | Ctrl pin applied current via 1kΩ<br>DC-DC ON<br>DC-DC OFF<br>Remote off input current<br><br>Application circuit<br>DC-DC ON<br>DC-DC OFF<br> | 2                    | 3                        | 4<br>2.5              | mA<br>mA       |

## OUTPUT SPECIFICATIONS

| Parameter                        | Conditions                                  | Min.         | Typ. | Max.         | Unit                           |
|----------------------------------|---------------------------------------------|--------------|------|--------------|--------------------------------|
| Voltage accuracy                 |                                             | -1.0         |      | +1.0         | %                              |
| Line regulation                  | Low Line to High Line at Full Load          | -0.2         |      | +0.2         | %                              |
| Load regulation                  | No Load to Full Load<br>Single<br>Dual      | -1.0<br>-1.0 |      | +1.0<br>+1.0 | %                              |
|                                  | 10% Load to 90% Full Load<br>Single<br>Dual | -0.5<br>-0.8 |      | +0.5<br>+0.8 | %                              |
| Cross regulation                 | Asymmetrical load 25%/100% FL<br>Dual       | -5.0         |      | +5.0         | %                              |
| Ripple and noise                 | 20MHz bandwidth                             |              | 50   |              | mVp-p                          |
| Temperature coefficient          |                                             | -0.02        |      | +0.02        | %/°C                           |
| Transient response recovery time | 25% load step change                        |              | 500  |              | μs                             |
| Short circuit protection         |                                             |              |      |              | Continuous, automatic recovery |

## GENERAL SPECIFICATIONS

| Parameter             | Conditions                                        | Min.         | Typ. | Max.                                 | Unit |
|-----------------------|---------------------------------------------------|--------------|------|--------------------------------------|------|
| Isolation voltage     | 1 minute Input to Output Standard Type Suffix "H" | 1600<br>3000 |      |                                      | VDC  |
| Isolation resistance  | 500VDC                                            | 1            |      |                                      | GΩ   |
| Isolation capacitance | Standard Type Suffix "H"                          |              |      | 200<br>40                            | pF   |
| Switching frequency   | Full load to minimum load                         | 100          |      |                                      | kHz  |
| Safety approvals      |                                                   |              |      | UL60950-1<br>EN60950-1<br>IEC60950-1 |      |
| Case material         |                                                   |              |      | Non-conductive black plastic         |      |
| Base material         |                                                   |              |      | None                                 |      |
| Potting material      |                                                   |              |      | Silicone (UL94 V-0)                  |      |
| Weight                |                                                   |              |      | 4.8g (0.17oz)                        |      |
| MTBF                  | MIL-HDBK-217F                                     |              |      | 4.903 x 10 <sup>6</sup> hrs          |      |

## ENVIRONMENTAL SPECIFICATIONS

| Parameter                     | Conditions                        | Min.       | Typ. | Max.         | Unit |
|-------------------------------|-----------------------------------|------------|------|--------------|------|
| Operating ambient temperature | Without derating<br>With derating | -40<br>+85 |      | +85<br>+100  | °C   |
| Storage temperature range     |                                   | -55        |      | +125         | °C   |
| Thermal shock                 |                                   |            |      | MIL-STD-810F |      |
| Vibration                     |                                   |            |      | MIL-STD-810F |      |
| Relative humidity             |                                   |            |      | 5% to 95% RH |      |

## EMC SPECIFICATIONS


| Parameter                     | Conditions                              | Level             |
|-------------------------------|-----------------------------------------|-------------------|
| EMI <sup>(2)</sup>            | EN55022                                 | Class A · Class B |
| ESD                           | EN61000-4-2 Air ± 8kV and Contact ± 6kV | Perf. Criteria A  |
| Radiated immunity             | EN61000-4-3 10 V/m                      | Perf. Criteria A  |
| Fast transient <sup>(3)</sup> | EN61000-4-4 ± 2kV                       | Perf. Criteria A  |
| Surge <sup>(3)</sup>          | EN61000-4-5 ±1kV                        | Perf. Criteria A  |
| Conducted immunity            | EN61000-4-6 10 Vr.m.s                   | Perf. Criteria A  |

### Note:


- It will not damage the device without installing external input capacitors. It's helpful to reduce input reflected ripple current if external input capacitors are installed.
- The standard modules meet EMI Class A or Class B with external components. For further information, please contact with P-DUKE.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.  
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220μF/100V.

**CAUTION:** This power module is not internally fused. An input line fuse must always be used.


## CHARACTERISTIC CURVE

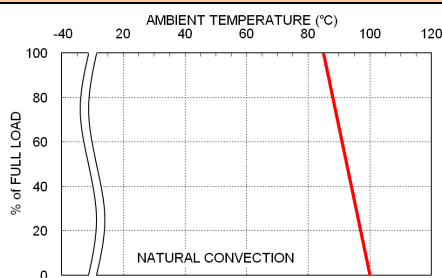

PDL02-24S05 Derating Curve

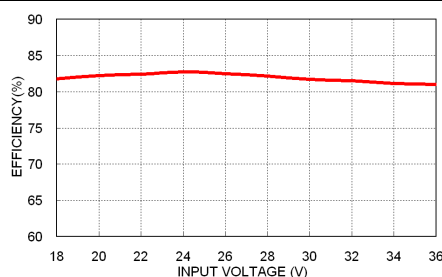


PDL02-24S05 Efficiency vs. Input Voltage

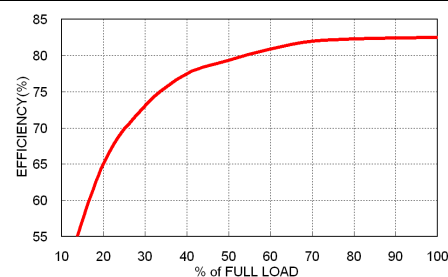

PDL02-24S05 Efficiency vs. Output Load

**MECHANICAL DRAWING**

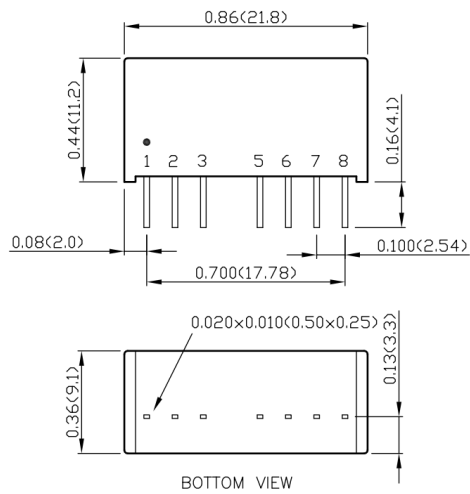

**PIN CONNECTION**

| PIN | SINGLE | DUAL   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 2   | +Vin   | +Vin   |
| 3   | Ctrl   | Ctrl   |
| 5   | NC     | NC     |
| 6   | +Vout  | +Vout  |
| 7   | -Vout  | Common |
| 8   | NC     | -Vout  |

\*NC pin for standard type model.

\*\*No pin for 3kVDC isolation model (suffix "H").

1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)  
x.xxx±0.01 (x.xx±0.25)
3. Pin pitch tolerance ±0.01 (0.25)
4. Pin dimension tolerance ±0.004 (0.1)