

UFEC60 SERIES

CHASSIS-MOUNT DC-DC CONVERTER

2:1 WIDE INPUT RANGE
UP TO 60 Watts



FEATURES

- NO MINIMUM LOAD REQUIRED
- 1600VDC INPUT TO OUTPUT ISOLATION
- APPLICATION OF CHASSIS-MOUNT DC/DC CONVERTERS
- SCREW TERMINALS FOR INPUT AND OUTPUT CONNECTIONS
- INTERNAL INPUT FUSE PROTECTION
- INTERNAL OUTPUT LED INDICATOR
- MEET EN55022 CLASS B
- SAFETY MEETS UL60950-1, EN60950-1, & IEC60950-1
- CE MARKED
- COMPLIANT TO RoHS II & REACH

APPLICATIONS

- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- MEASUREMENT EQUIPMENT
- SEMICONDUCTOR EQUIPMENT

1600VDC ISOLATION	REMOTE CONTROL	UVP	OCP	SCP	OVP	FUSE INCLUDED	INRUSH LIMIT	REVERSE POLARITY PROTECTION
----------------------	-------------------	-----	-----	-----	-----	------------------	-----------------	-----------------------------------

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load (1)
	VDC	VDC	A	mA	%	μF
UFEC60-24S3P3	18 ~ 36	3.3	14	102	87	36000
UFEC60-24S05	18 ~ 36	5	12	132	88	20400
UFEC60-24S12	18 ~ 36	12	5	57	89	3550
UFEC60-24S15	18 ~ 36	15	4	72	89	2300
UFEC60-24S24	18 ~ 36	24	2.5	85	88	885
UFEC60-48S3P3	36 ~ 75	3.3	14	100	87	36000
UFEC60-48S05	36 ~ 75	5	12	92	88	20400
UFEC60-48S12	36 ~ 75	12	5	35	89	3550
UFEC60-48S15	36 ~ 75	15	4	40	89	2300
UFEC60-48S24	36 ~ 75	24	2.5	60	88	885

PART NUMBER STRUCTURE

UFEC60 -	48	S	05	-	N	EC
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Remote Control Option	Assembly Option	
	24: 18~36 48: 36~75	S: Single	3P3: 3.3 05: 5 12: 12 15: 15 24: 24	☐ : Positive logic N: Negative logic	☐ : No Assembly Option EC: Enclosed Mounting Type DR: Din Rail Mounting Type ED: Enclosed & Din Rail Mounting Type	

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom) 48Vin(nom)	18 36	24 48	36 75	VDC
Input fuse (slow blow)	24Vin(nom) 48Vin(nom)		8 4		A
In-rush current			15		A
Input reflected ripple current	Nominal input and Full load		15		mAp-p
Start up voltage	24Vin(nom) 48Vin(nom)			17.5 34.5	VDC
Shutdown voltage	24Vin(nom) 48Vin(nom)		15 32		VDC
Start up time	Constant resistive load Power up Remote ON/OFF		100 20		ms
Input surge voltage	100ms, max. 24Vin(nom) 48Vin(nom)			50 100	VDC
Remote ON/OFF	Referred to –Vin pin Positive logic DC-DC ON (Standard) DC-DC OFF Negative logic DC-DC ON (Option) DC-DC OFF Input current of Ctrl pin Remote off input current			Open or 3 ~ 12VDC Short or 0 ~ 1.2VDC Short or 0 ~ 1.2VDC Open or 3 ~ 12VDC -0.5 1.0 4	mA mA

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy	3.3Vout Others	-1.5 -1.0		+1.5 +1.0	%
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%
Load regulation	No Load to Full Load 3.3Vout Others	-2.0 -1.5		+2.0 +1.5	%
Voltage adjustability	Single output 24Vout Others	-10 -10		+20 +10	%
Ripple and noise	Measured by 20MHz bandwidth 3.3Vout, 5Vout 12Vout, 15Vout 24Vout		75 100 130		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		µs
Over voltage protection	Zener diode clamp 3.3Vout 5Vout 12Vout 15Vout 24Vout	3.7 5.6 13.8 16.8 30.0		5.4 7.0 17.5 20.5 33.0	VDC
Output indicator				Green LED	
Over load protection	% of Iout rated			150	%
Short circuit protection				Continuous, automatic recovery	

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute Input to Output Input (Output) to Chassis	1600 1600			VDC
Isolation resistance	500VDC	1			GΩ
Isolation capacitance				4000	pF
Switching frequency		270	300	330	kHz
Safety meets				UL60950-1 EN60950-1 IEC60950-1	
Chassis material				Aluminum	
Weight				122g (4.29oz)	
MTBF	MIL-HDBK-217F, Full load			3.307 x 10 ⁵	hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating With derating	-40 +54		+54 +85	°C
Over temperature protection	DC/DC Converter Case		120		°C
Storage temperature range		-40		+105	°C
Thermal shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity				5% to 95% RH	


EMC SPECIFICATIONS

Parameter	Conditions	Level
EMI	EN55022	Class B
ESD	EN61000-4-2 Air ± 8 kV and Contact ± 6 kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2 kV	Perf. Criteria A
Surge	EN61000-4-5 ± 1 kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10Vr.m.s	Perf. Criteria A


Note:

1. Test by minimum input and constant resistive load.


CHARACTERISTIC CURVE

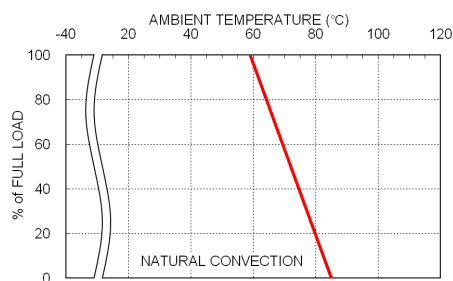

UFEC60-48S05 Derating Curve

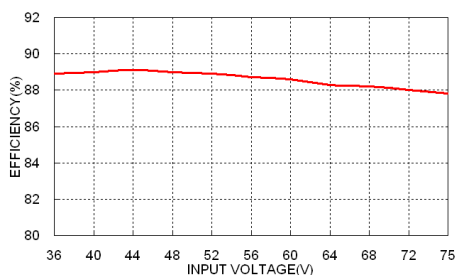


UFEC60-48S05 Efficiency vs. Input Voltage

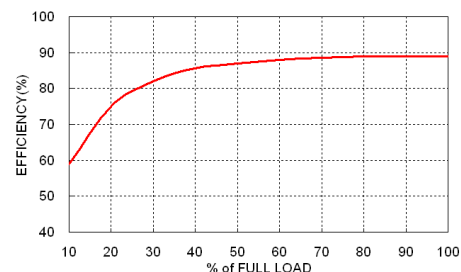

UFEC60-48S05 Efficiency vs. Output Load

CHASSIS MOUNTING TYPE

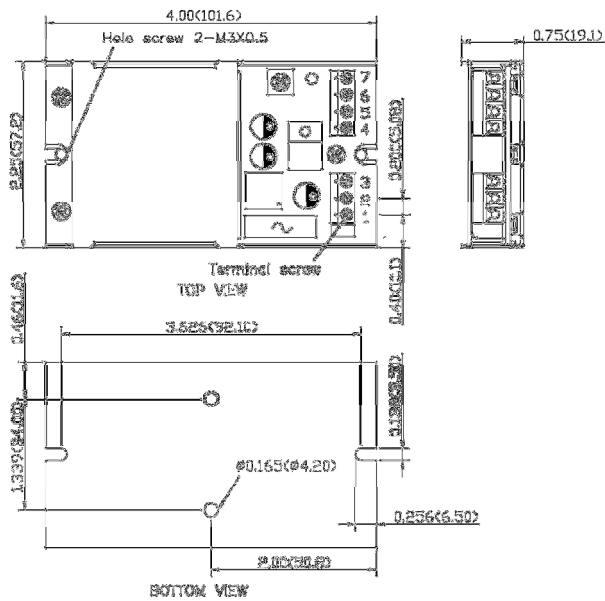


PIN CONNECTION

PIN	SINGLE
1	+Vin
2	-Vin
3	Ctrl
4	NC
5	-Vout
6	+Vout
7	NC


* NC : No Connection

* Screw terminals –
wire range from 14 to 18 AWG

ENCLOSED MOUNTING TYPE

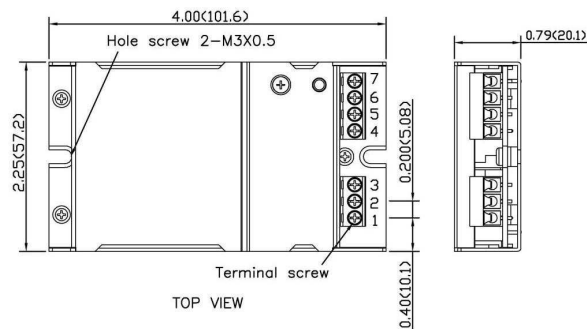

DIN RAIL MOUNTING TYPE

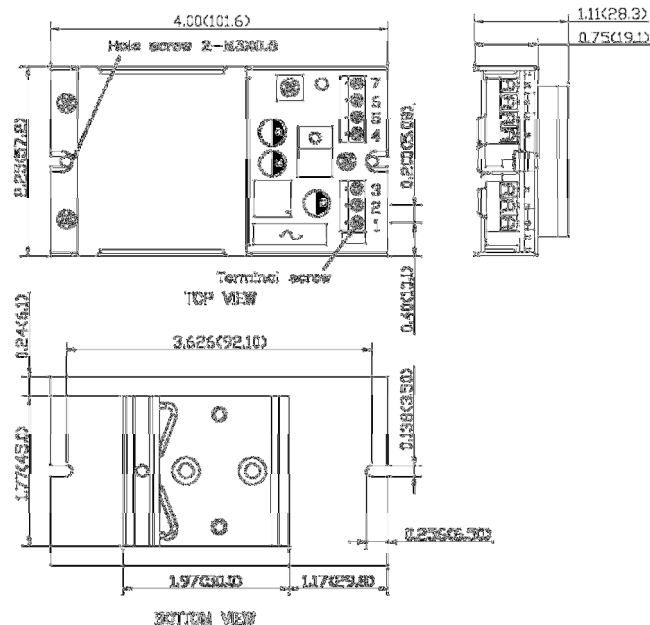

1. All dimensions in Inch (mm)
2. Tolerance : X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
3. Hole screw locked torque :
MAX 5.0kgf—cm (0.49N—m)
4. Terminal screw locked torque :
MAX 2.5kgf—cm (0.25N—m)